Previous Screen

Table of Contents

Model 255


Pneudraulic Powered Installation Tool

Spec	ifications
Mainle	4.

Weight: 9.3 lbs.

Stroke: .88 in.

Required Air Pressure: 90-100 psi

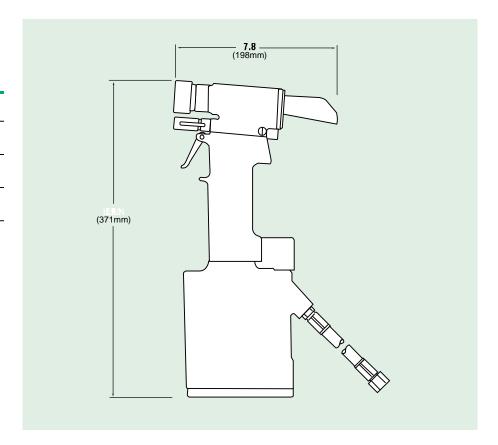

Compatible Fastener

Туре	Diameter	Nose Assembly	
BOM	3/16	99-1053	
	1/4	99-830-1	
MAGNA-GRIP	3/16	99-3206	
	1/4	99-3207	
	5/16	99-1439	
	3/8*	99-1440	
FLOORTIGHT	5/16	99-3452	
C6L	5/16	99-99-245	
	3/8*	99-100-245	



The Super LockForce 255 is sized for high-speed production applications, up to 20 fastener installations per minute. This tool provides optimum stroke for one-cycle installations, and features an eccentric pull piston for limited clearance applications. Chrome-plated piston rods in the Super LockForce 245 extend the life of the seals.



