
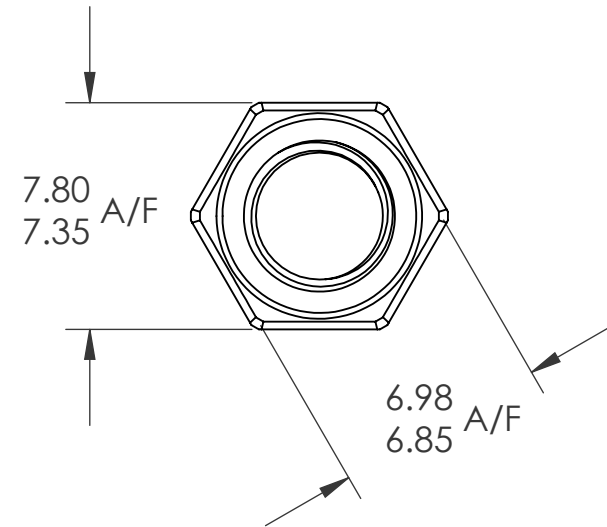
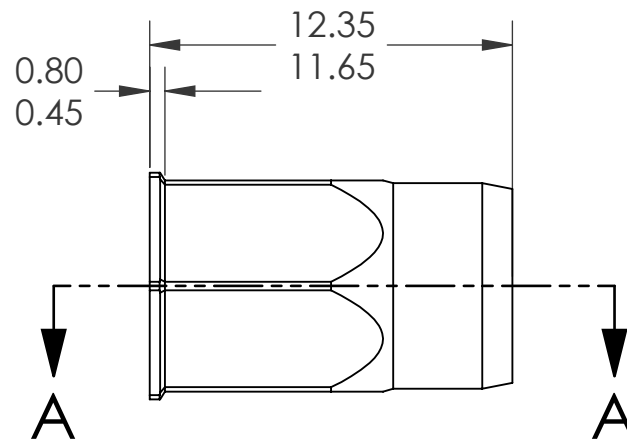


SECTION A-A

M5X0.8 6H
PER ASME B1.13M
MINOR DIA.: 4.13 - 4.33



NOTE:

1. GRIP RANGE: 0.5 - 3.0
2. HOLE SIZE: 7.0 +0.1/-0.0 A/F AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE					
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH ± 1 BEND ± 1 ONE PLACE DECIMAL ± 0.10 TWO PLACE DECIMAL ± 0.05	DRAWN	JVK	3/11/08					
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED							
			ENG APPR.	JVK	3/11/08	TITLE: LOW PROFILE HEAD, HALF HEX				
			MFG APPR.	TB	8/25/08					
			Q.A.							
		MATERIAL 316 STAINLESS	COMMENTS:			SIZE DWG. NO. A TU-316M5HUKO30			REV A	
			E-mail: info@sherex.com							
			www.sherex.com							
		FINISH	Phone: 866-474-3739							
		PASSIVATE	Fax: 716-875-0358							
NEXT ASSY	USED ON									
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT: .0015 kg	SHEET 1 OF 1	