

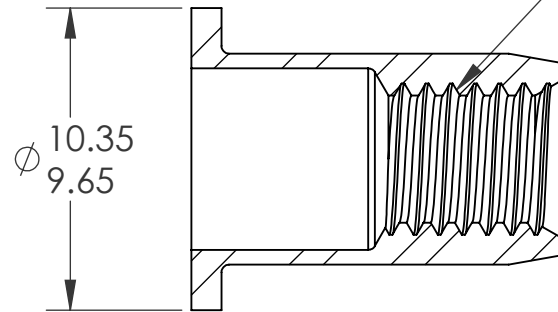
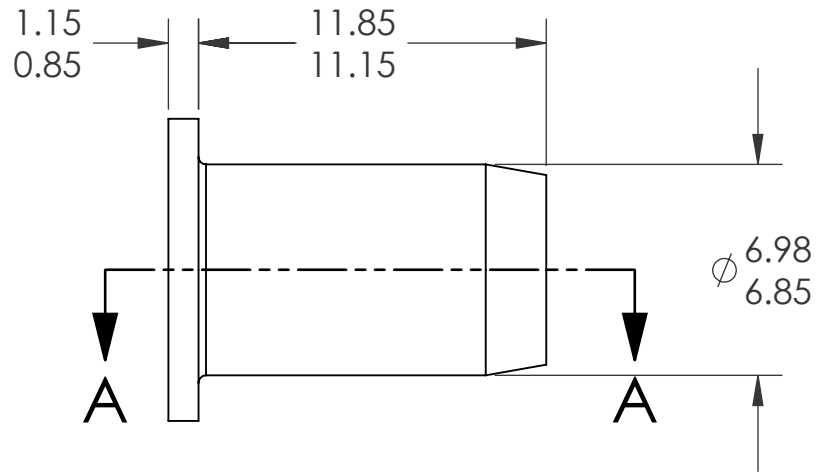


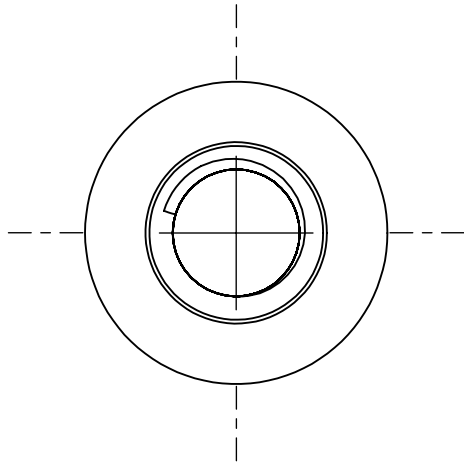

M5X0.8 6H
PER ASME B1.13M
MINOR DIA.: 4.13 - 4.33



SECTION A-A

NOTE:

1. GRIP RANGE: 0.5 - 3.0
2. HOLE SIZE: 7.0 +0.1/-0.0 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: N/A
4. INSTALLED THREAD DEPTH:
5. LUBRICATION: NONE
6. INSTALLATION TOOL: SPIN PULL

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
		DIMENSIONS ARE IN MILLIMETERS TOLERANCES: ANGULAR: MACH± 1 BEND ±1 ONE PLACE DECIMAL ±0.10 TWO PLACE DECIMAL ±0.05	DRAWN	JVK	3/6/08		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED				
		MATERIAL	ENG APPR.	JVK	3/6/08	TITLE: FLAT HEAD OPEN END	
		316 STAINLESS	MFG APPR.	TB	8/7/08		
		FINISH	Q.A.				
NEXT ASSY	USED ON	PASSIVATE	COMMENTS:			SIZE	
			E-mail: info@sherex.com			DWG. NO.	
			www.sherex.com			A	
			Phone: 866-474-3739			TU-316M5UPO30	
			Fax: 716-875-0358			REV	
APPLICATION		DO NOT SCALE DRAWING				A	
						SCALE: 2:1	
						WEIGHT: .0018 kg	
						SHEET 1 OF 1	