


- NOTE:
- THE FOLLOWING STEEL DFLECTORS ARE
OPTIONALLY AVAILABLE:
- FOR USE WITH 246 TOOL, USE 123634-246.
- FOR USE WITH 2502/2503 TOOL USE 123634-2503.
- FOR USE WITH 2580 TOOL USE 123634-2580.

REV	DESCRIPTION	DATE
D	ADDED NOTE: 1.	10/31/00

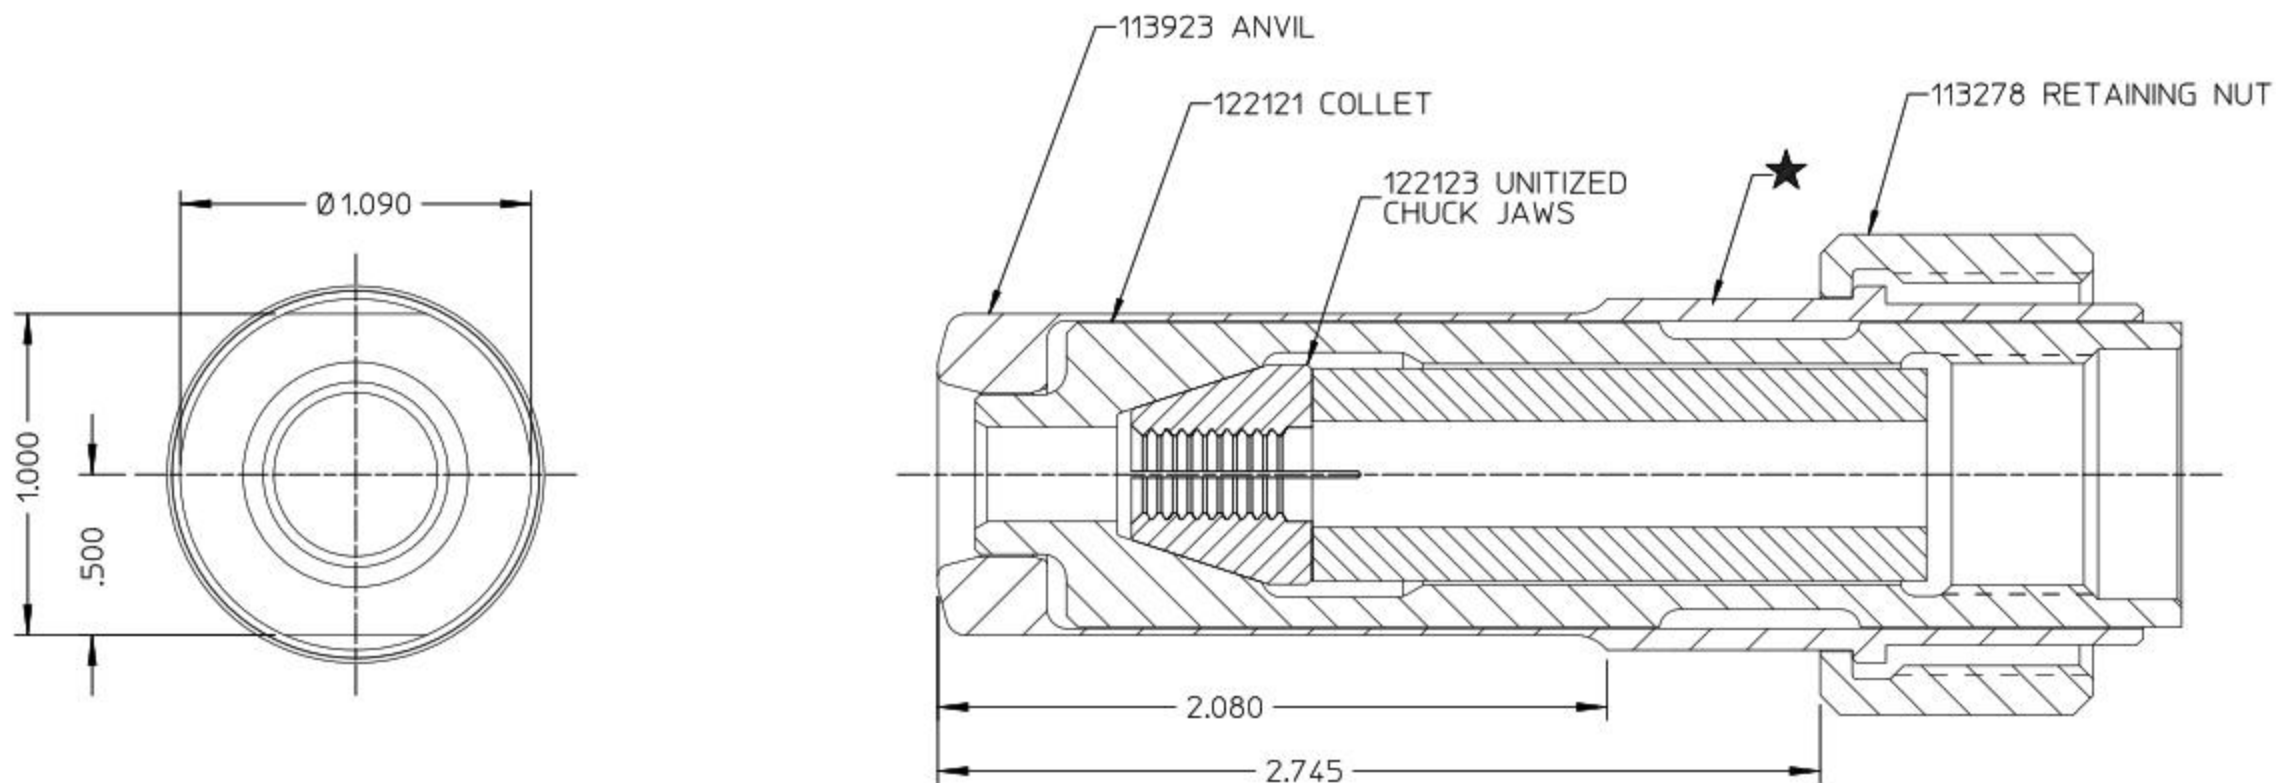

FORM: KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.						
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED:		HUCK INTERNATIONAL, INC., I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
HARDNESS:	-	(RAW OR STOCKED STATE)	(ALL DIMENSIONS ARE IN INCHES)					
HEAT TREAT TO:	-	SPEC:	.XX, .XXX ±		NOSE ASSEMBLY -12 BOM			
SURFACE TREAT:	-	SPEC:	INT. COR. RADII					
SURFACE FINISH NOT TO EXCEED:		Ra	BREAK EDGES		DET: T.L.	CK:	DATE: 01-15-96	SCALE: 2/1
IDENTIFICATION PER SPEC 42-311: ★ BAG			ANGLES ±		FOC.	B	99-1272	
SURFACES TO BE ☉, //, ⦿, ⊥, & ▽ WITHIN T.I.R.			FINAL ASSY: 245		FAC.			