
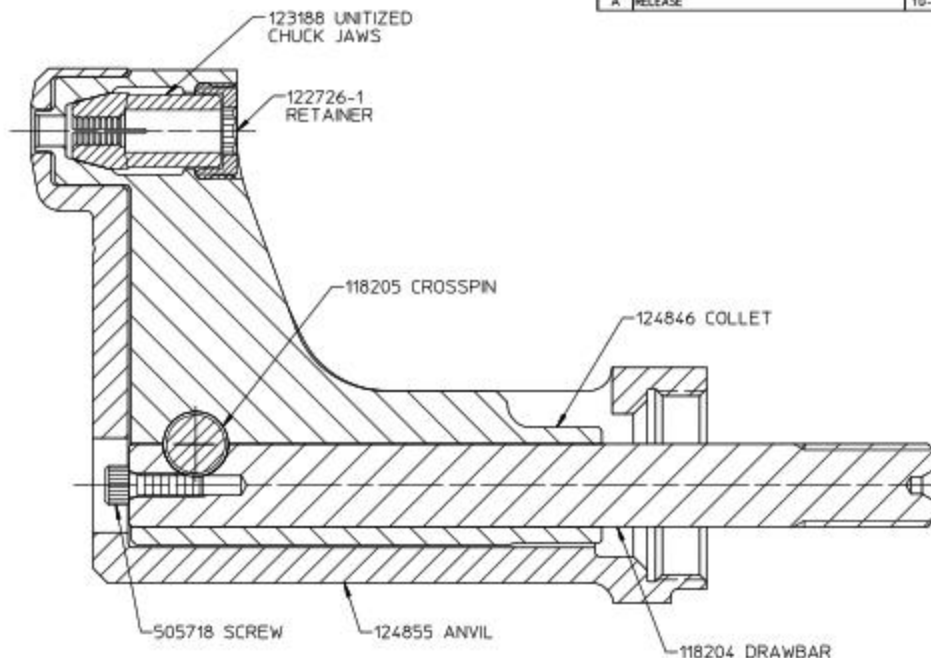


REV	DESCRIPTION	DATE
A	RELEASE	10-25-95

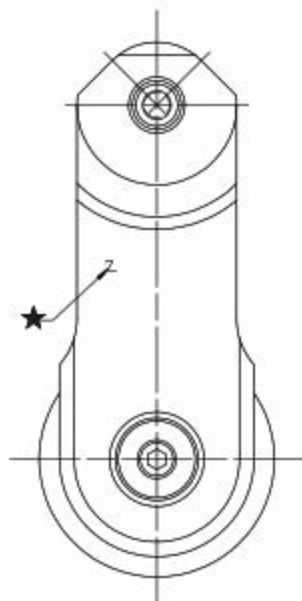

NOTES:

- 1 MAXIMUM RECOMMENDED STROKE: .500
- 2 FOR USE WITH 245 TOOL, USE ATTACHMENT P/N 119400 AND STROKE LIMITER P/N 118362.
- 3 FOR USE WITH 2500 TOOL, USE ATTACHMENT P/N 119400 AND STROKE LIMITER KIT P/N 119688.
- 4 FOR OTHER TOOLS AND/OR OTHER TOOL AND STROKE COMBINATIONS, CONSULT ENGINEERING DEPARTMENT.
- 5 OPTIONAL DEFLECTOR KIT P/N 122728-1 CONSISTING OF:
DEFLECTOR P/N 120095 AND BARBED RETAINER P/N 122727-1 AVAILABLE FOR THIS NOSE.

FORM 15/16 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.			
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED:	HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401	
HARDNESS:	-	(RAW OR STOKED STATE)	(ALL DIMENSIONS ARE IN INCHES)		
HEAT TREAT TO:	-	SPEC:	XX, XXX ± .01-.005	NOSE ASSEMBLY -05 LGP STRADDLE	
SURFACE TREAT:	-	SPEC:	INT. COR. RADII .005-.015		
SURFACE FINISH NOT TO EXCEED:	125 Ra		BREAK EDGES .005-.015	DET. T. L. (OK)	DATE: 10-25-95 SCALE: 2/1
IDENTIFICATION PER SPEC 42-311:	★ PERMANENT		ANGLES ± 3°	FOC	
SURFACES TO BE	☉, //, ⊥, & ☐	WITHIN .005 T.I.R.	FINAL ASSY: 206-375	PAC	B 99-1733-1