
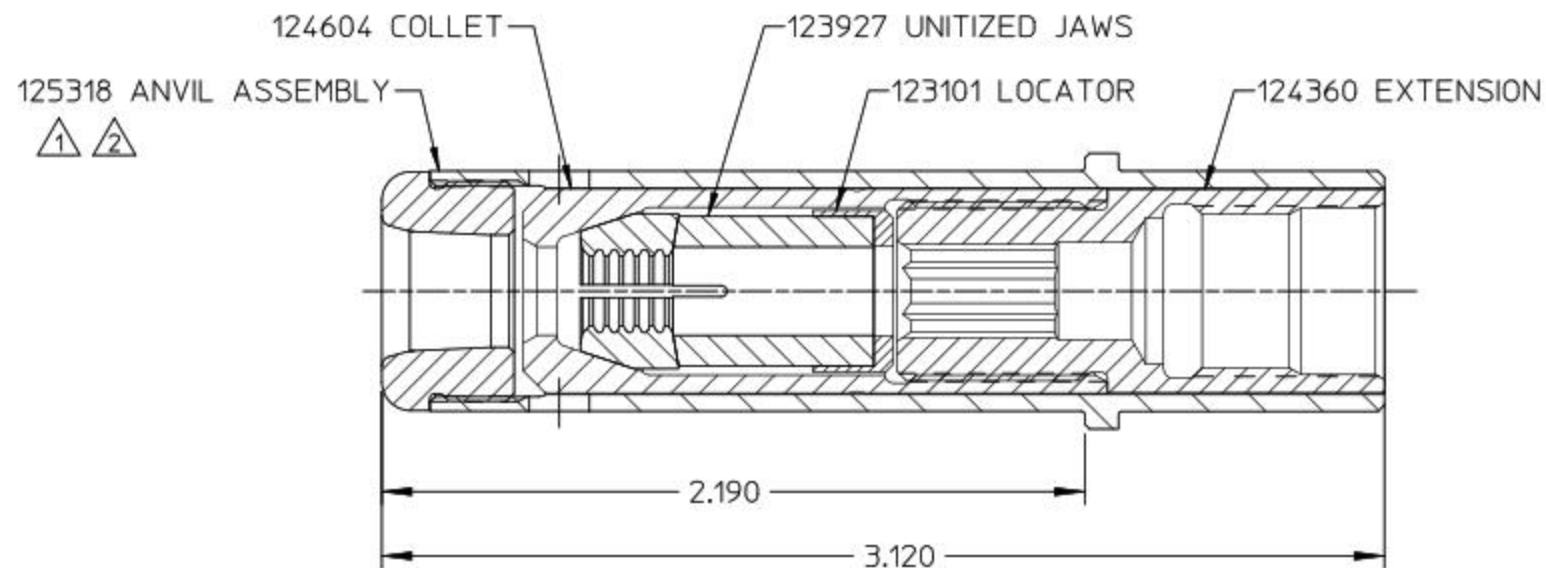


NOTES:

1. ANVIL ASSY 125318 CONSISTS OF:
(1) 120636-2 ANVIL HOLDER AND
(1) 123926 ANVIL INSERT
BOTH ARE AVAILABLE INDIVIDUALLY.
2. ANVIL INSERT WRENCH 125400 IS
OPTIONALLY AVAILABLE.

REV	DESCRIPTION	DATE
A	RELEASE (FORMERLY PR1430)	09-27-96
B	COLLET 124604 WAS 115828.	05-13-97
C	ADD NOTES 1 & 2	07-07-99

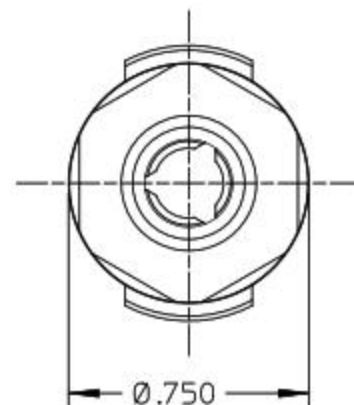

FORM: KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.						
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED: (ALL DIMENSIONS ARE IN INCHES)		HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DRIVE, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
HARDNESS:	-	(RAW OR STOCKED STATE)						
HEAT TREAT TO:	-	SPEC:	.XX, .XXX ±	-	NOSE ASSEMBLY -08 C6L			
SURFACE TREAT:	-	SPEC:	INT. COR. RADII	-				
SURFACE FINISH NOT TO EXCEED: Ra			BREAK EDGES	-	DET: SMR	CK:	DATE: 09/27/96	SCALE: 2/1
IDENTIFICATION PER SPEC 42-311: ★ ETCH			ANGLES ±	-	FOC.		B	99-3006-352
SURFACES TO BE ☉, //, ⊕, ⊥, & ▽ WITHIN T.I.R.			FINAL ASSY: 352		FAC.			