
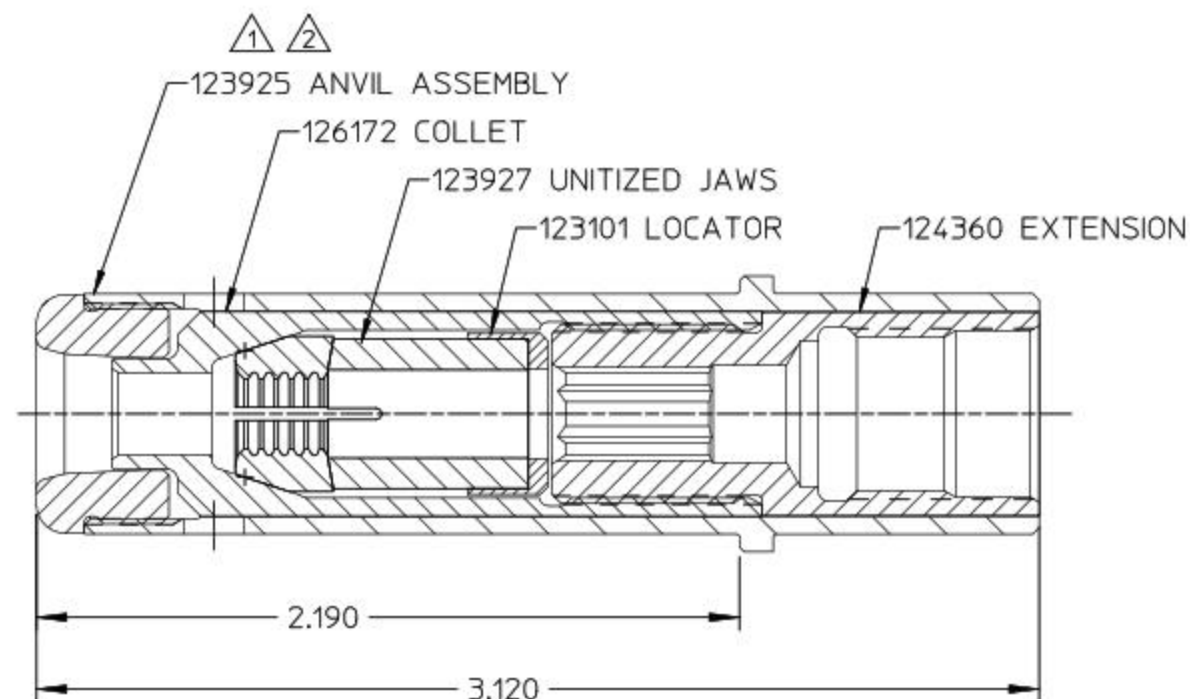


NOTES:

1. ANVIL ASSY 123925 CONSISTS OF:
 (1) 120636-1 ANVIL HOLDER AND
 (1) 123926 ANVIL INSERT
 BOTH ARE AVAILABLE INDIVIDUALLY.
2. ANVIL INSERT WRENCH 125400 IS
 OPTIONALLY AVAILABLE.

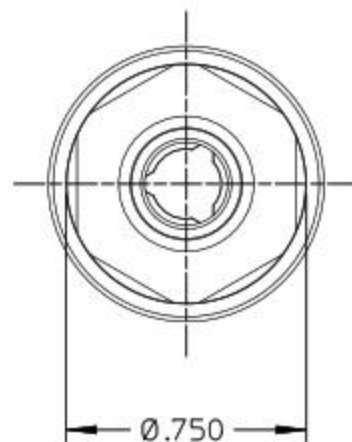

NOTE: THIS NOSE ASSY IS TO BE USED WITH
 POSITIVE EJECTION TOOLS ONLY

FORM: KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.						
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED: (ALL DIMENSIONS ARE IN INCHES)		HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DRIVE, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
HARDNESS:	-	(RAW OR STOCKED STATE)						
HEAT TREAT TO:	-	SPEC:	.XX, .XXX ±	.01, .005	NOSE ASSEMBLY -08 C6L FOR POSITIVE EJECTION TOOLS			
SURFACE TREAT:	-	SPEC:	INT. COR. RADII	.005-.015				
SURFACE FINISH NOT TO EXCEED: - Ra			BREAK EDGES	.005-.015	DET: MP	CK:	DATE: 05-26-00	SCALE: 2:1
IDENTIFICATION PER SPEC 42-311: ★ ETCH			ANGLES ±	3°	FOC.	B	99-3006-E	
SURFACES TO BE ☉, //, ⊕, ⊥, & ▽ WITHIN - T.I.R.			FINAL ASSY:		FAC.			

REV	DESCRIPTION	DATE
A	RELEASE	05/26/00