

NOTE:



1. THE FOLLOWING STEEL DFLECTORS ARE
OPTIONALLY AVAILABLE:

FOR USE WITH 246 TOOL, USE 123634-246.

FOR USE WITH 2502/2503 TOOL USE 123634-2503.

FOR USE WITH 2580 TOOL USE 123634-2580.

REV	DESCRIPTION	DATE
B	ADDED NOTE: 1.	10/31/00

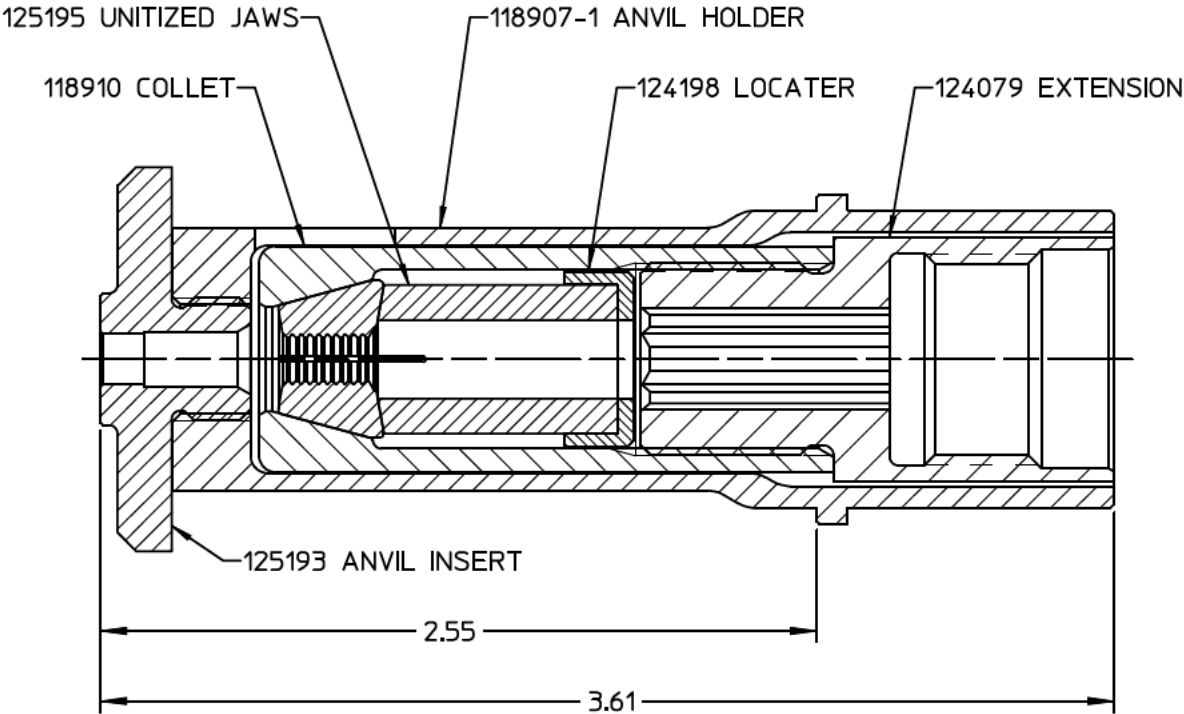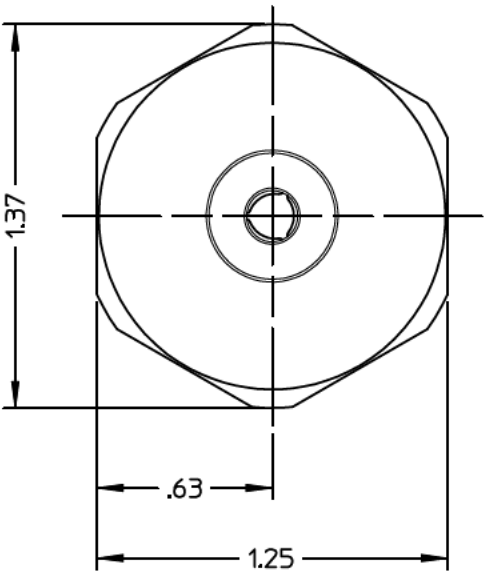

FORM KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.			
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED: (ALL DIMENSIONS ARE IN INCHES)		HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401
HARDNESS:	-	(RAW OR STOCKED STATE)			
HEAT TREAT TO:	-	SPEC:	XX, XXX ±	-	NOSE ASSEMBLY -06 FLOOR FASTENER
SURFACE TREAT:	-	SPEC:	INT. COR. RADII	-	
SURFACE FINISH NOT TO EXCEED:		Ra	BREAK EDGES	-	DET: SMR CK:
IDENTIFICATION PER SPEC 42-311: ★		ETCH	ANGLES ±	-	DATE: 07/16/96 SCALE: 2/1
SURFACES TO BE		○, //, Φ, ⊥, & □	WITHIN	T.I.R.	FINAL ASSY:
					FOC. FAC. B 99-3441