



REV	DESCRIPTION	DATE
A	RELEASE	11-20-96

NOTES:

1 TORQUE ALL THREADED JOINTS TO 28-32 FT/LBS

- 2

ANVIL ASSEMBLY 124107 CONSISTS OF:
124106 ANVIL
124105 RATCHET PIN (2)
507166 O-RING

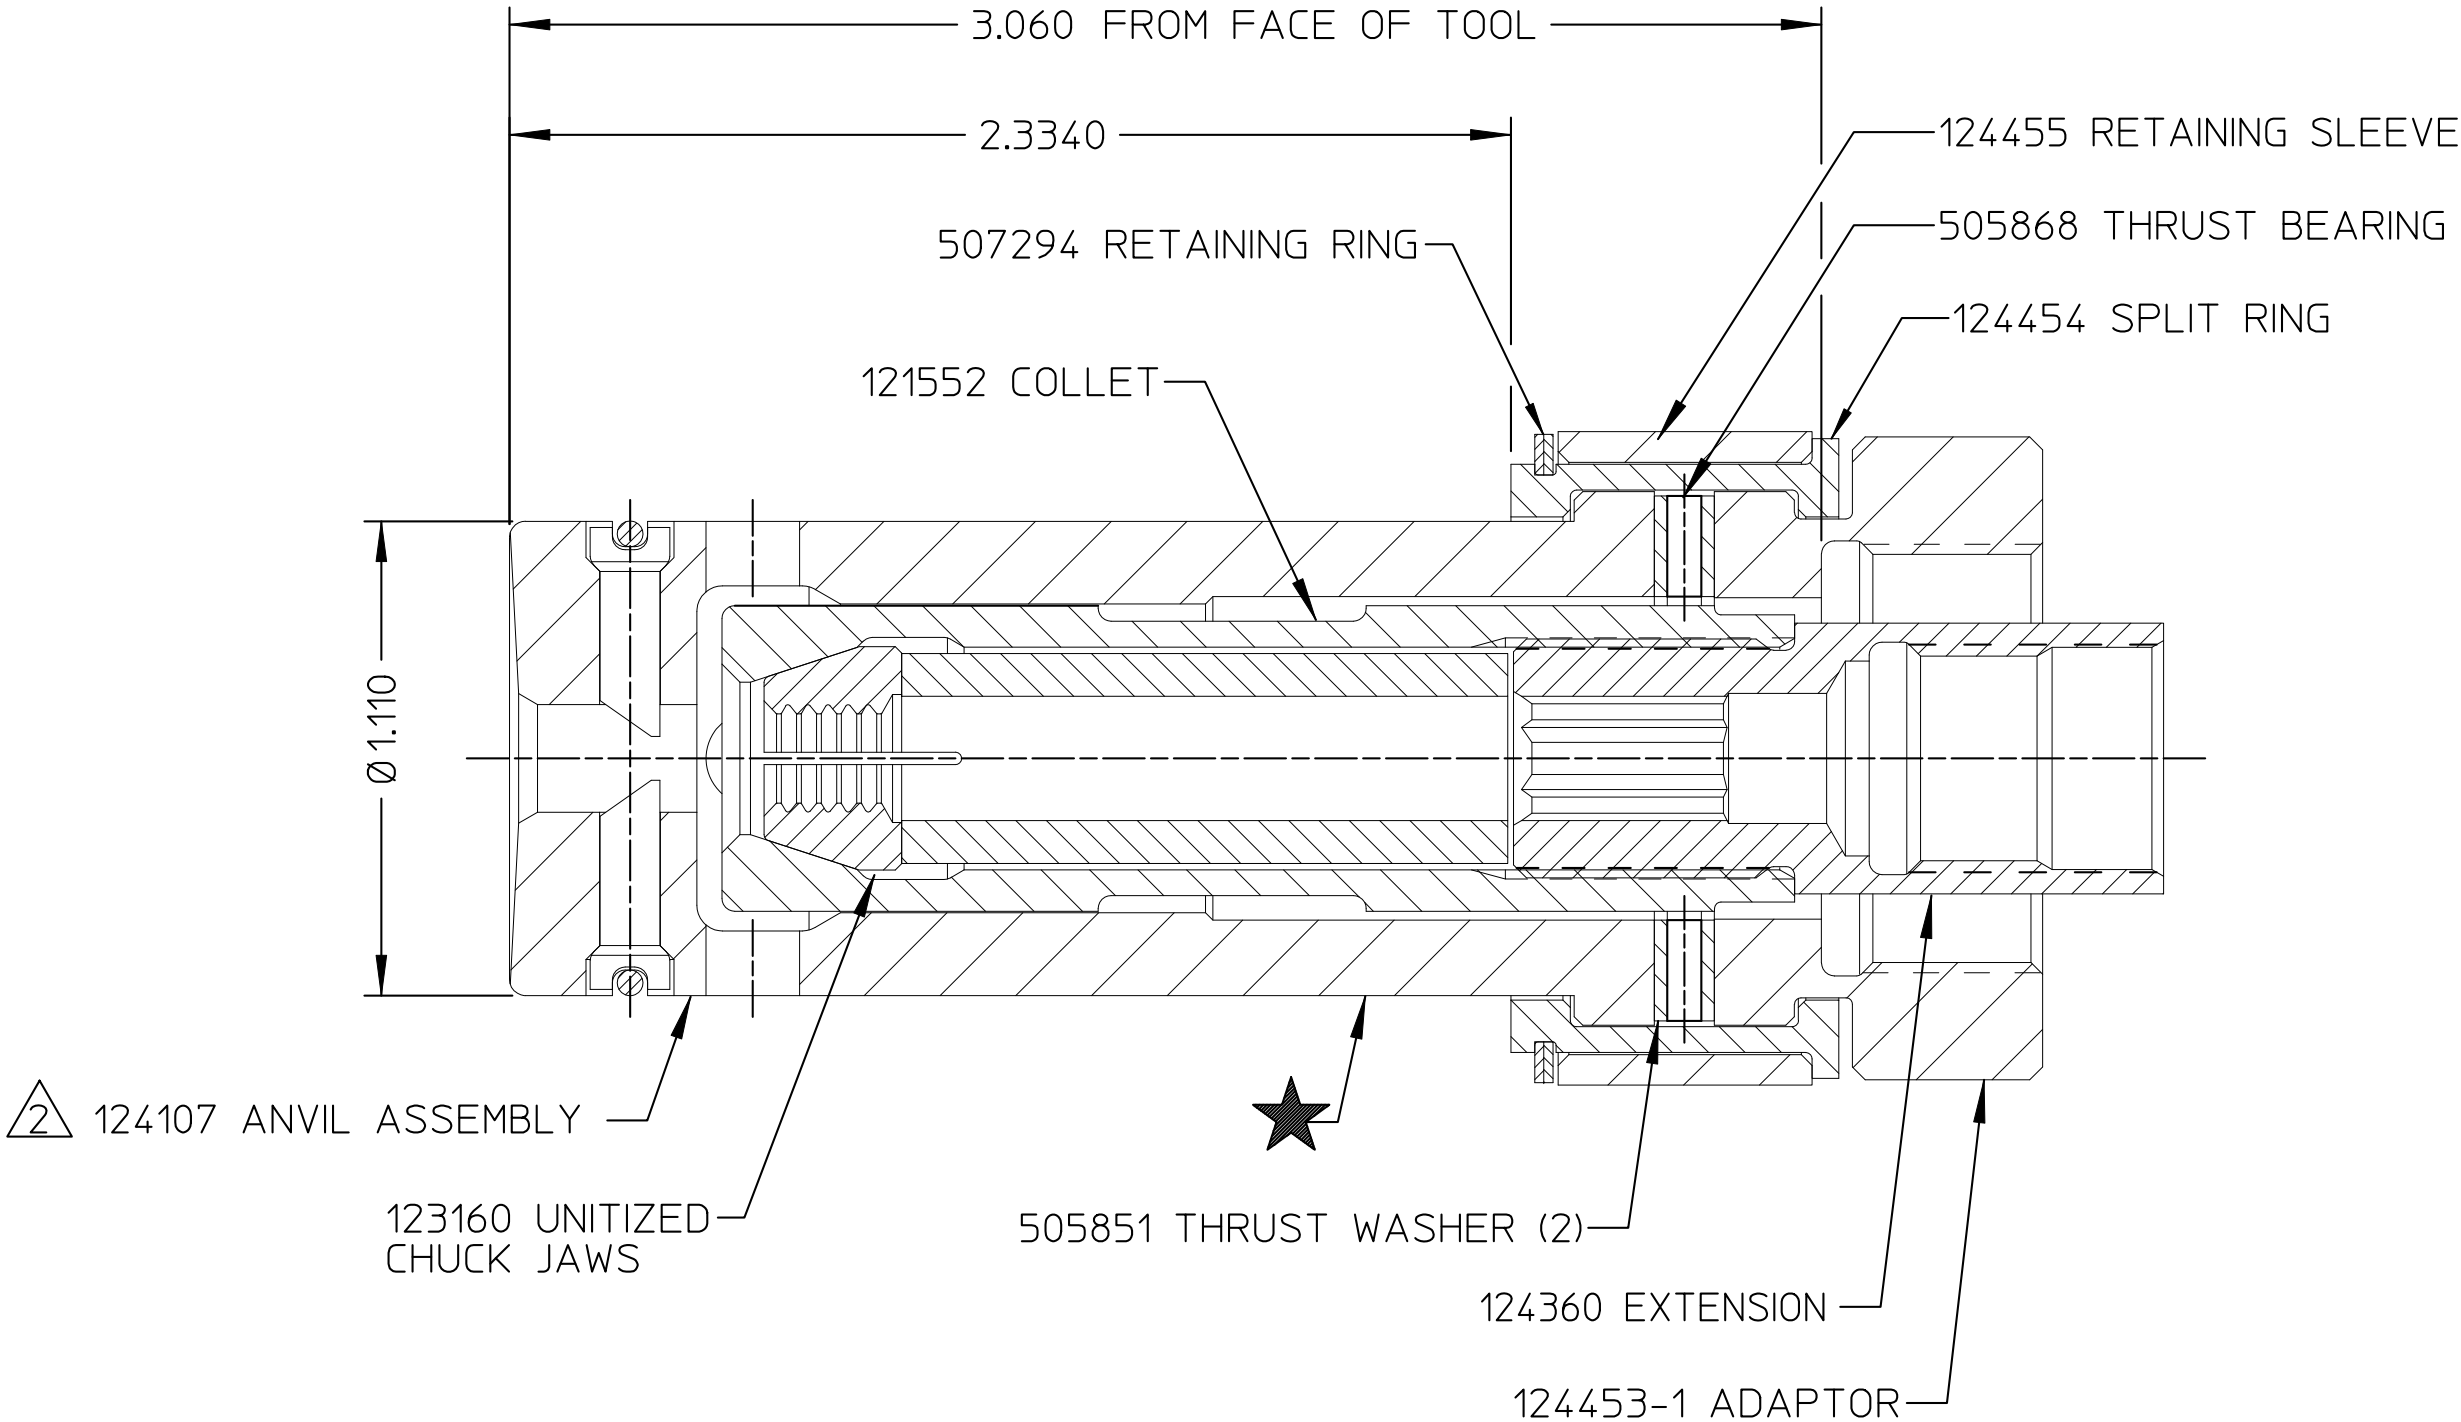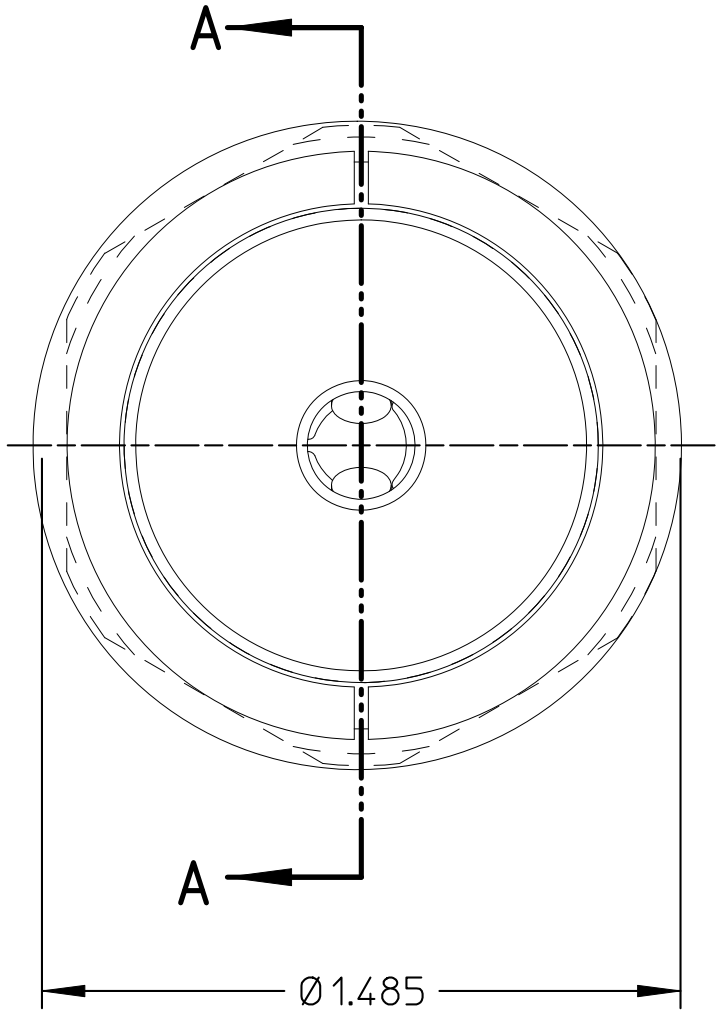

SECTION A-A

FORM: KE104 REV C		By accepting this proprietary Huck drawing, recipient agrees not to reproduce or disclose any part thereof to any others without the written permission of Huck International, Inc.							
MATERIAL:	-	SPEC:	TOLERANCES UNLESS OTHERWISE SPECIFIED: (ALL DIMENSIONS ARE IN INCHES)		HUCK INTERNATIONAL, INC., I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401				
HARDNESS:	-	(RAW OR STOCKED STATE)							
HEAT TREAT TO:	-	SPEC:	.XX, .XXX	±	NOSE ASSEMBLY -12 LP (FOR 230 TOOL)				
SURFACE TREAT:	-	SPEC:	INT. COR. RADII						
SURFACE FINISH NOT TO EXCEED: Ra			BREAK EDGES		DET: T.L.	CK:	DATE: 11-20-96	SCALE: 2/1	
IDENTIFICATION PER SPEC 42-311: ★ ETCH			ANGLES ±		FOC.		B	99-3465	
SURFACES TO BE ☉, //, Φ, ⊥, & ▱ WITHIN T.I.R.			FINAL ASSY: 230		FAC.				