


REV	DESCRIPTION	DATE
B	126157 WAS 121515	07/10/00
C	127639 WAS 124301	9/20/04

NOTES.

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUTS TO 90-100 LB-FT.
- 5 THIS NOSE ASSEMBLY REQUIRES THE USE OF ACTUATOR ROD ASSY P/N 125330

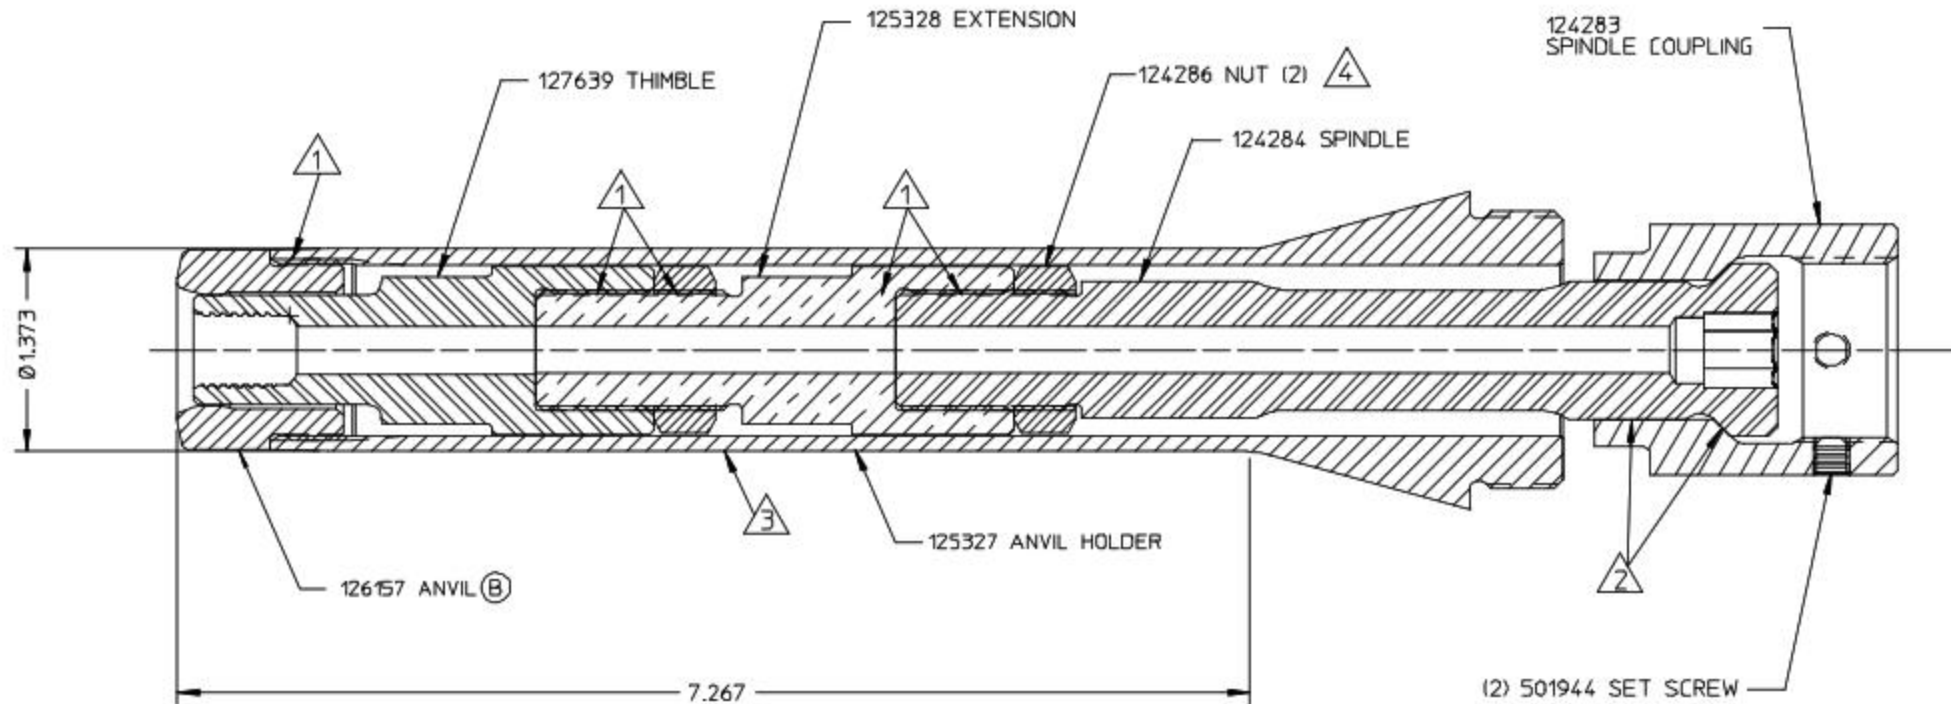

HUCK INTERNATIONAL, INC., I.E.D.
85 GRAND STREET, P.O. BOX 2270
KINGSTON, NEW YORK 12401

NOSE ASSY, LONG, UNSHROUDED,
HS16 IHS37 TOOL, 1/2' HUCK-SPIN

DET:RDD	CK:	DATE:10/04/96	SCALE: 1/1
FOC.	B	99-7307-1	
FAC			