
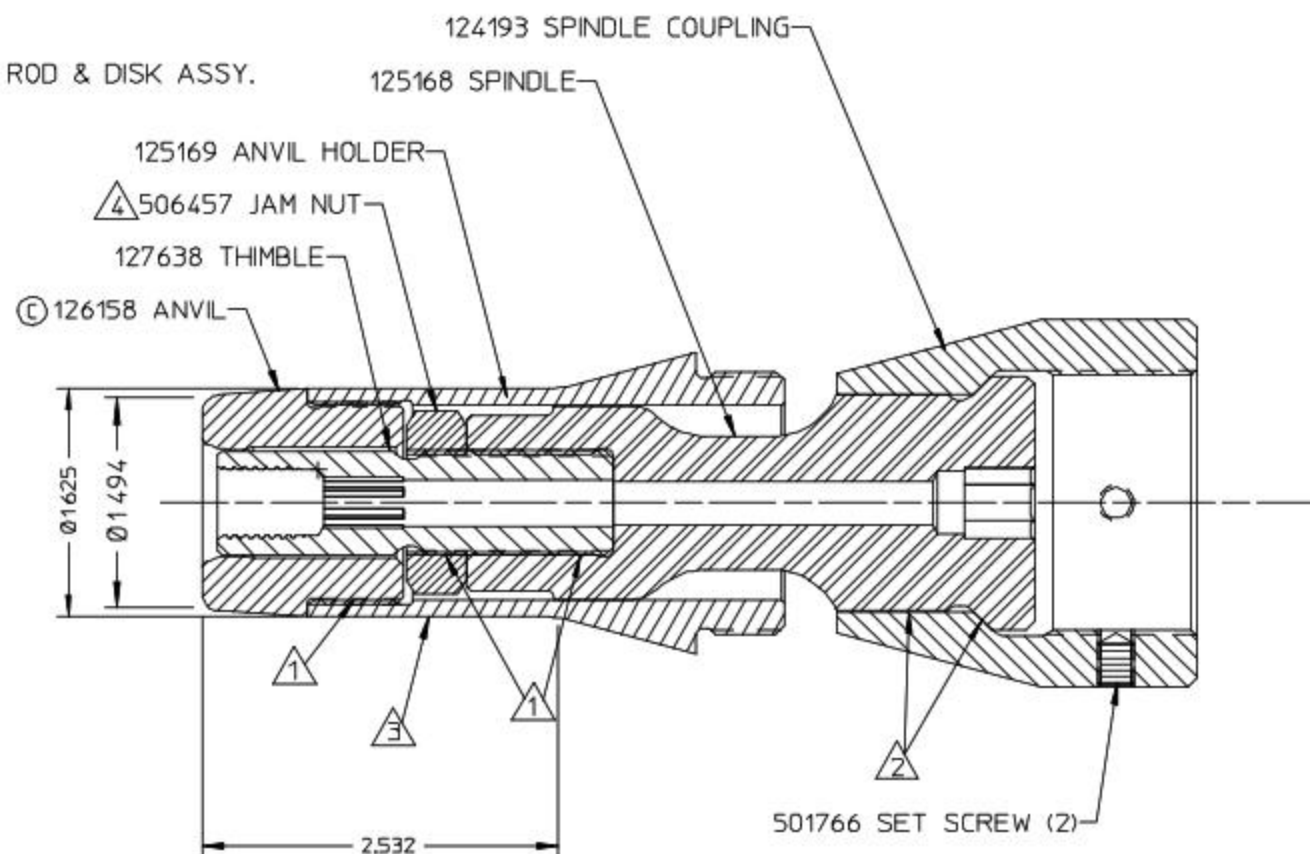


REV	DESCRIPTION	DATE
A	RELEASE	05/16/96
B	REMOVED 121406	06/10/96
C	126158 WAS 124703	07/10/00
D	127638 WAS 124701	9/20/04

NOTES.

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUT TO 90-100 LB-FT
- 5 MUST BE USED WITH 124053 ACTUATOR ROD & DISK ASSY.

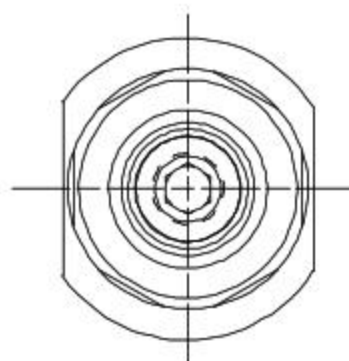

HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
ASSY. NOSE HS-16 (HS52) SHORT 1/2" HUCKSPIN			
DET	TRK	CK	DATE 5/16/96
FOC	B		SCALE 11
FAC	99-7308-1		