


NOTES.

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUTS TO 90-100 LB-FT
- 5 THIS NOSE ASSEMBLY MUST BE USED WITH ACTUATOR ROD & DISK ASSEMBLY P/N 124641

REV	DESCRIPTION	DATE
A	RELEASE	02/21/96
B	B1625 WAS 1710, B1494 WAS 1464, 7270 WAS 7500	04/03/96
C	REMOVED 121406	06/10/96
D	124701 WAS 124701-MAR	11/24/99
E	126158 WAS 124703	07/10/00
F	127638 WAS 124701	9/20/04

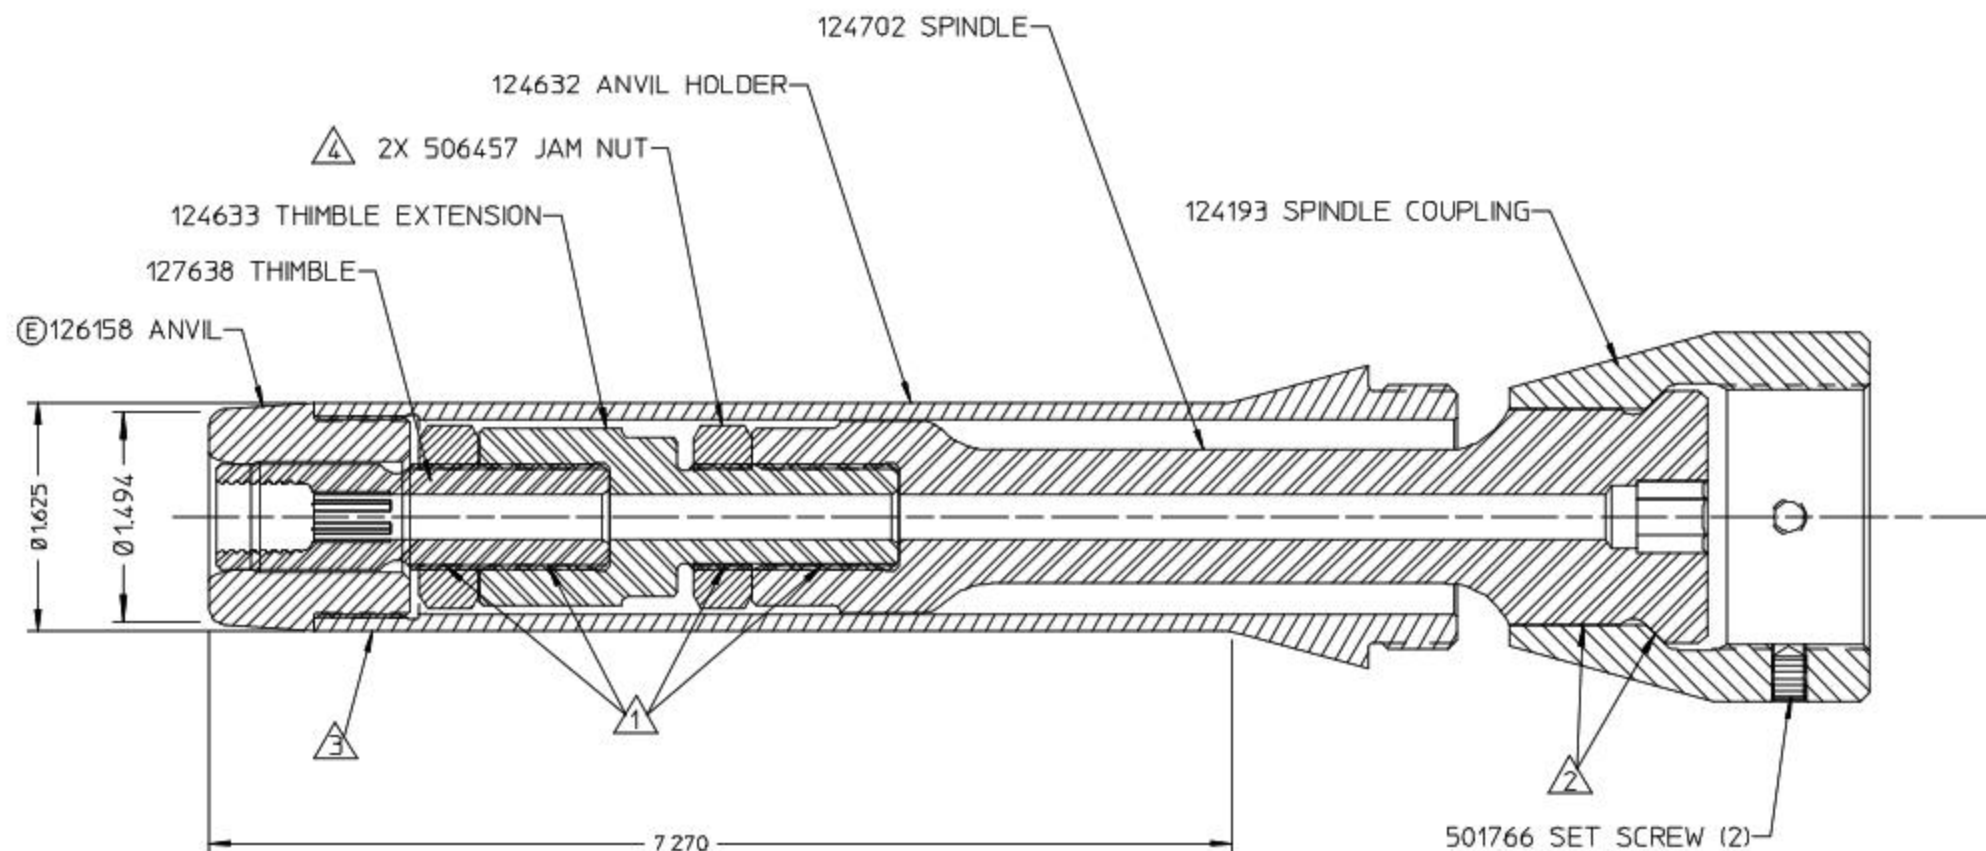

HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401		
ASSY. NOSE, LONG, HS-16 (HS52) 1/2" HUCKSPIN		
DET ROD CK	DATE 9/13/94	SCALE 11
FOC FAC	B	99-7309-1