


REV	DESCRIPTION	DATE
A	RELEASE	3/29/95
B	ADDED NOTES 3, 4 & P/N 590273	8/30/95
C	Ø1625 WAS 1710; Ø1494 WAS 1464; 5282 WAS 5512	4/3/96
D	REMOVED 121406	6/10/96
E	126158 WAS 124703	07/10/00
F	127638 WAS 124701	9/20/04

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUT TO 90-100 LB-FT.

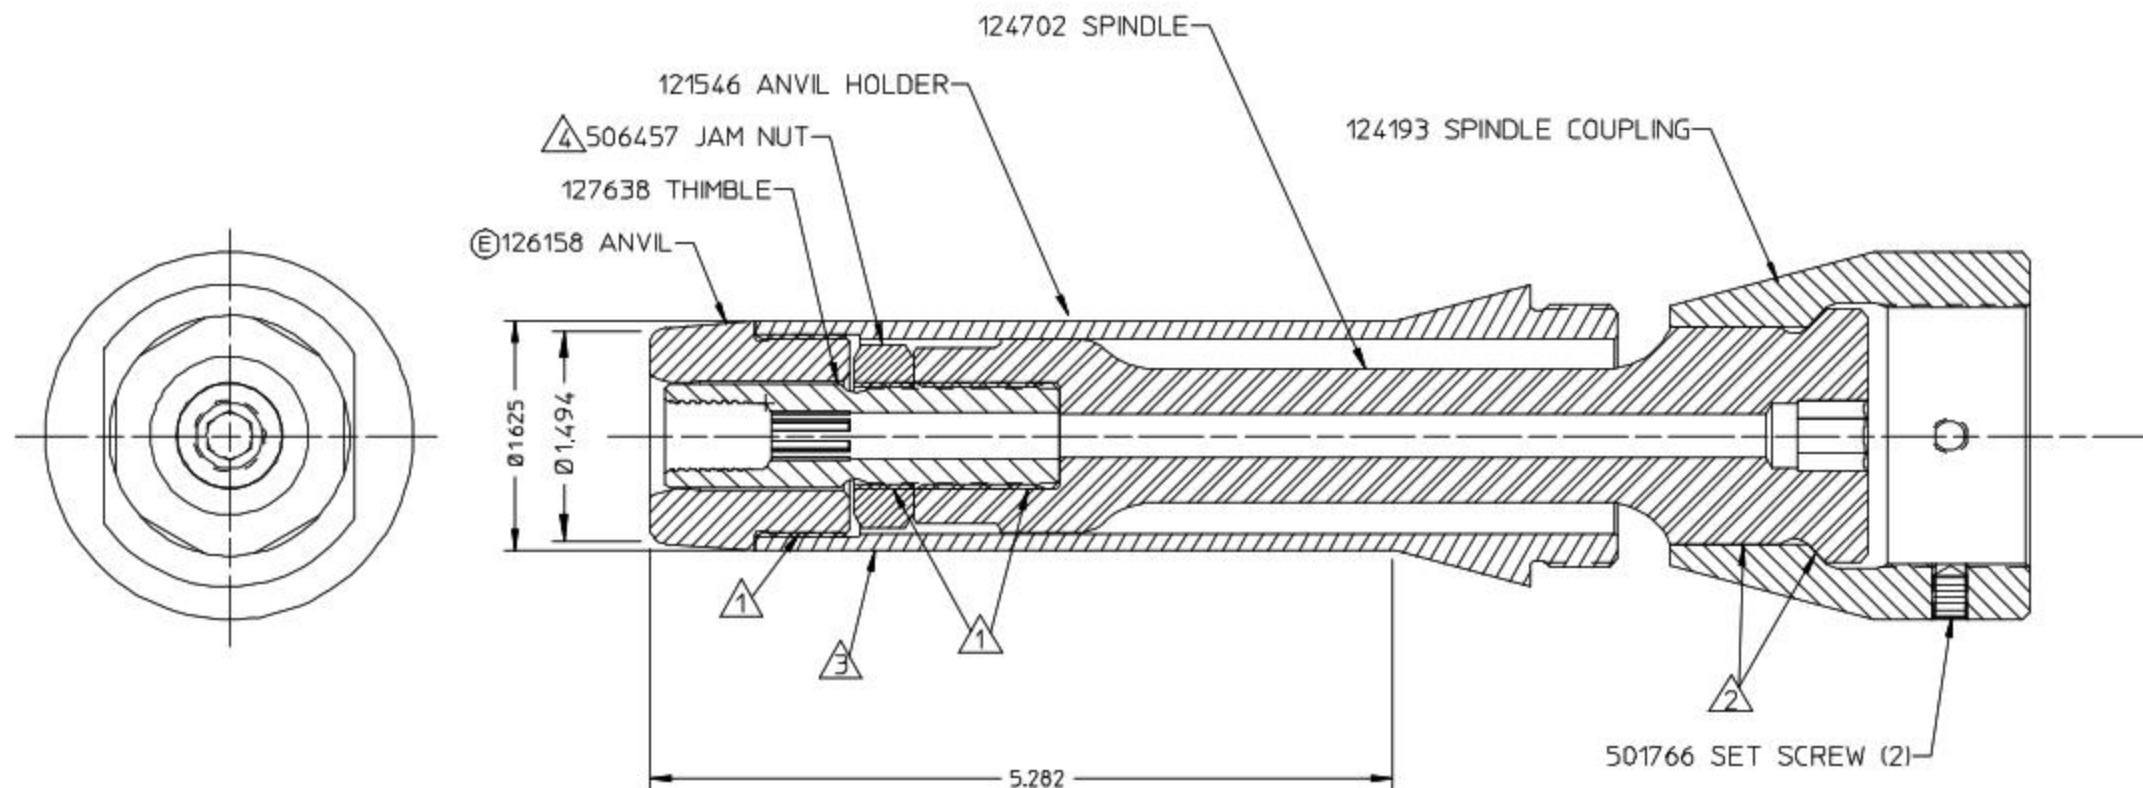

HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
ASSY, NOSE HS-16 (HS52) 1/2" HUCKSPIN			
DET RDT CK	DATE 9/13/94	SCALE 11	
FOC FAC	B	99-7313-1	