


REV	DESCRIPTION	DATE
A	RELEASE	4/7/95
B	ADDED NOTE 3, 4 & P/N 590273	8/30/95
C	REMOVED 121406, 506605 WAS 506644	6/10/96
D	126159 WAS 124045	07/10/00
E	127641 WAS 124346	9/20/04

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.

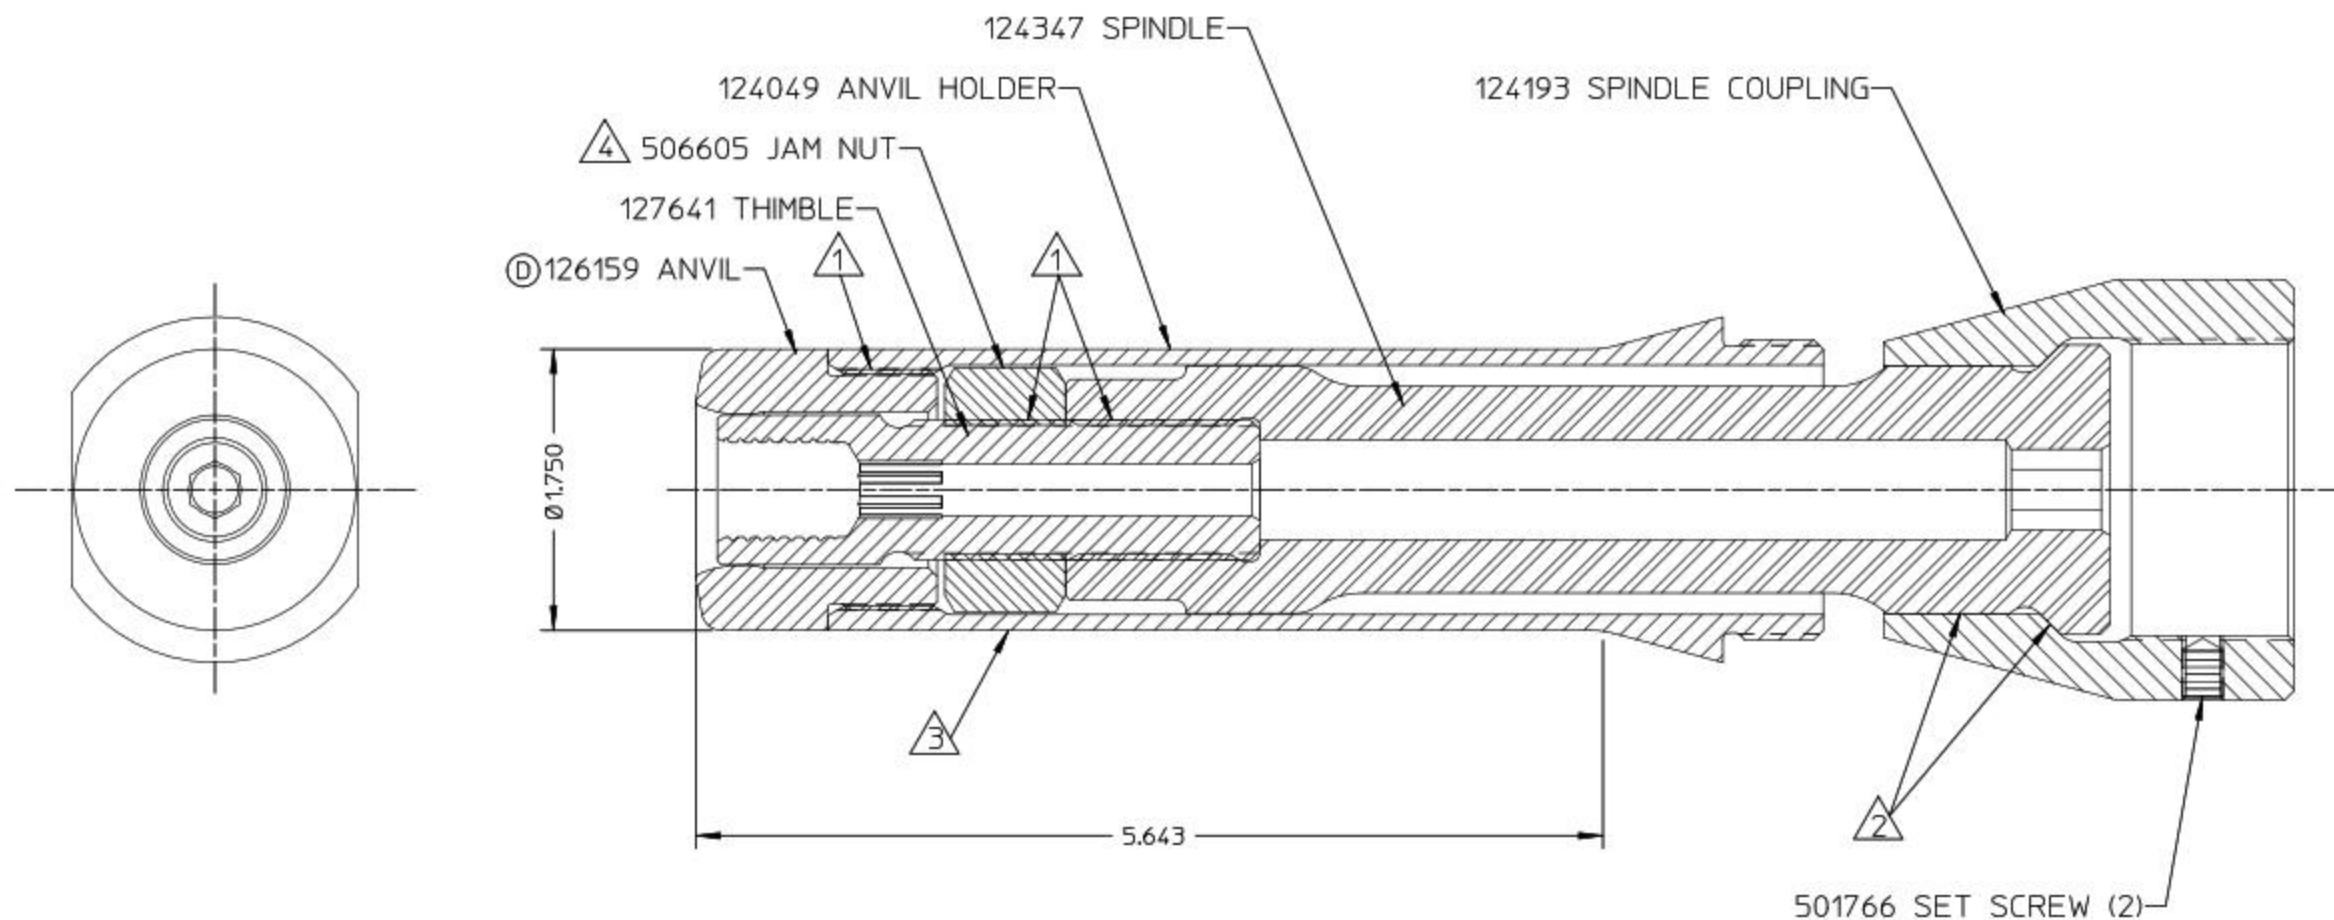

HUCK INTERNATIONAL, INC., I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
ASSY, NOSE MHS-16 & HS-20 (HS52) 16mm & 5/8" HUCK-SPIN			
DET:TRK	CK:	DATE: 4/7/95	SCALE: 1:1
FOC.	B	99-7315-1	
FAC.			