


REV	DESCRIPTION	DATE
A	RELEASE - SUPERSEDES 99-3448	4/7/95
B	ADDED NOTE 4, 5 & P/N 590273	8/30/95
C	REMOVED 121406, 506605 WAS 506644	6/10/96
D	126159 WAS 124045	7/10/00
E	127641 WAS 124346	9/20/04

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 MUST BE USED WITH 124053 ACTUATOR ROD & DISK ASSY.
- 4 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 5 TORQUE JAM NUT TO, 90-100 LB-FT.

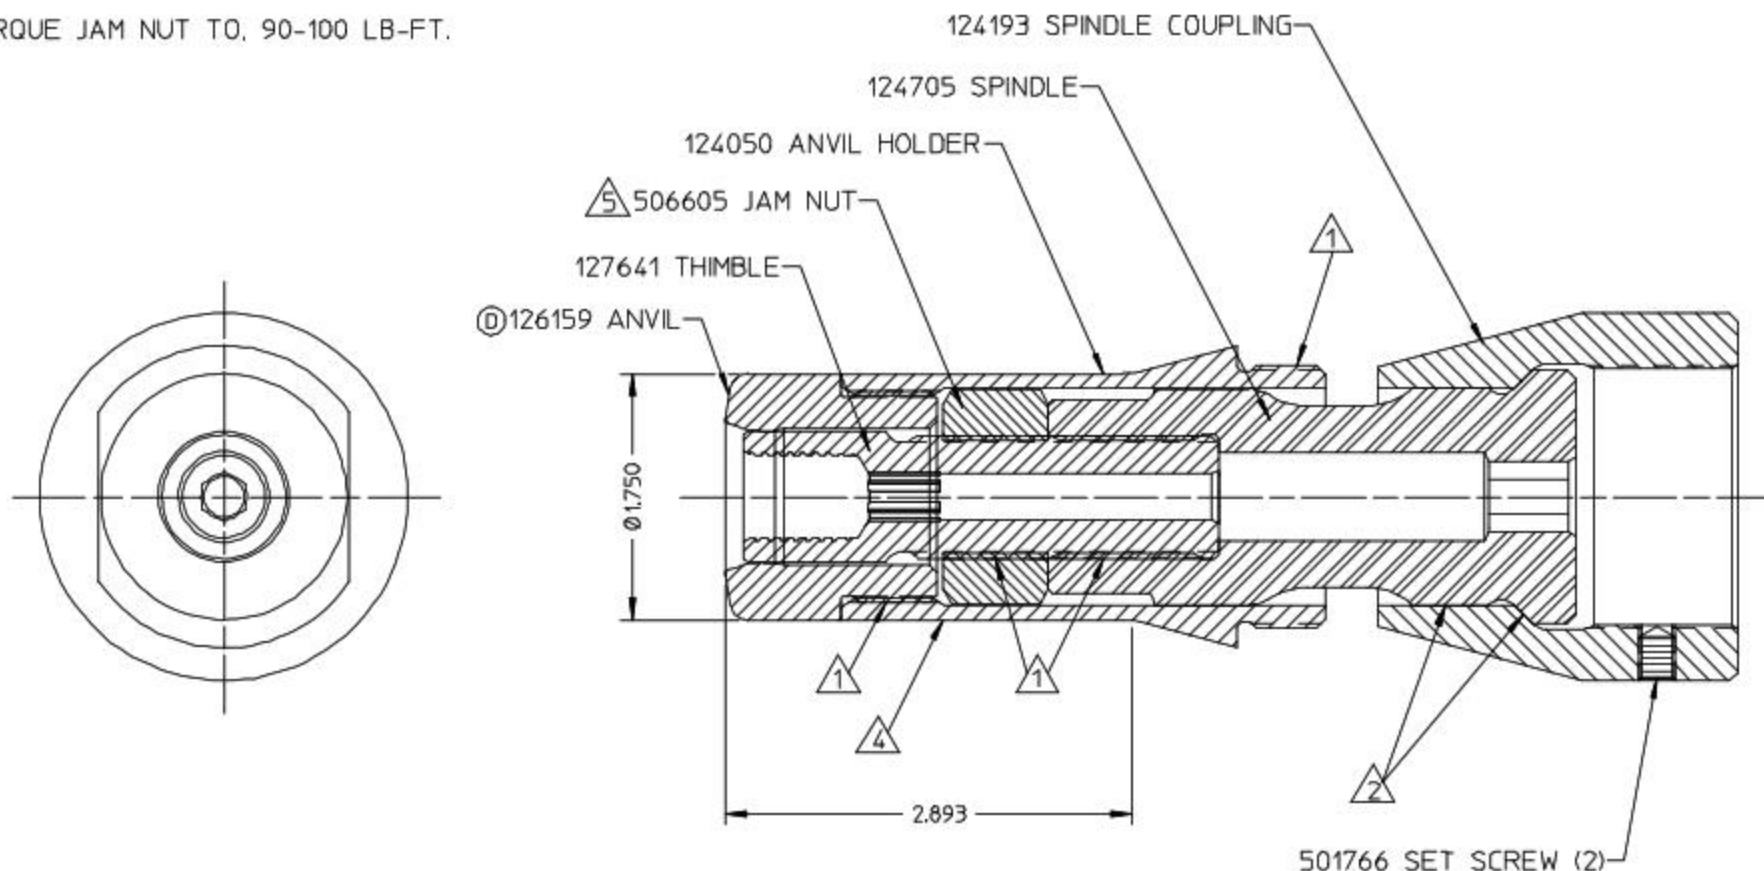

HUCK INTERNATIONAL, INC. I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401		
ASSY. NOSE MHS-16 & HS-20 (HS52) 16mm & 5/8" HUCK-SPIN (SHORT)		
DET TRK CK	DATE 4/7/95	SCALE 1:1
FOC FAC	B	99-7316-1