


REV	DESCRIPTION	DATE
B	126159 WAS 124045	07/10/00
C	127641 WAS 124346	9/20/04

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.
- 5 MUST BE USED WITH ACTUATOR ROD ASSY P/N 124641 SOLD SEPARATELY.

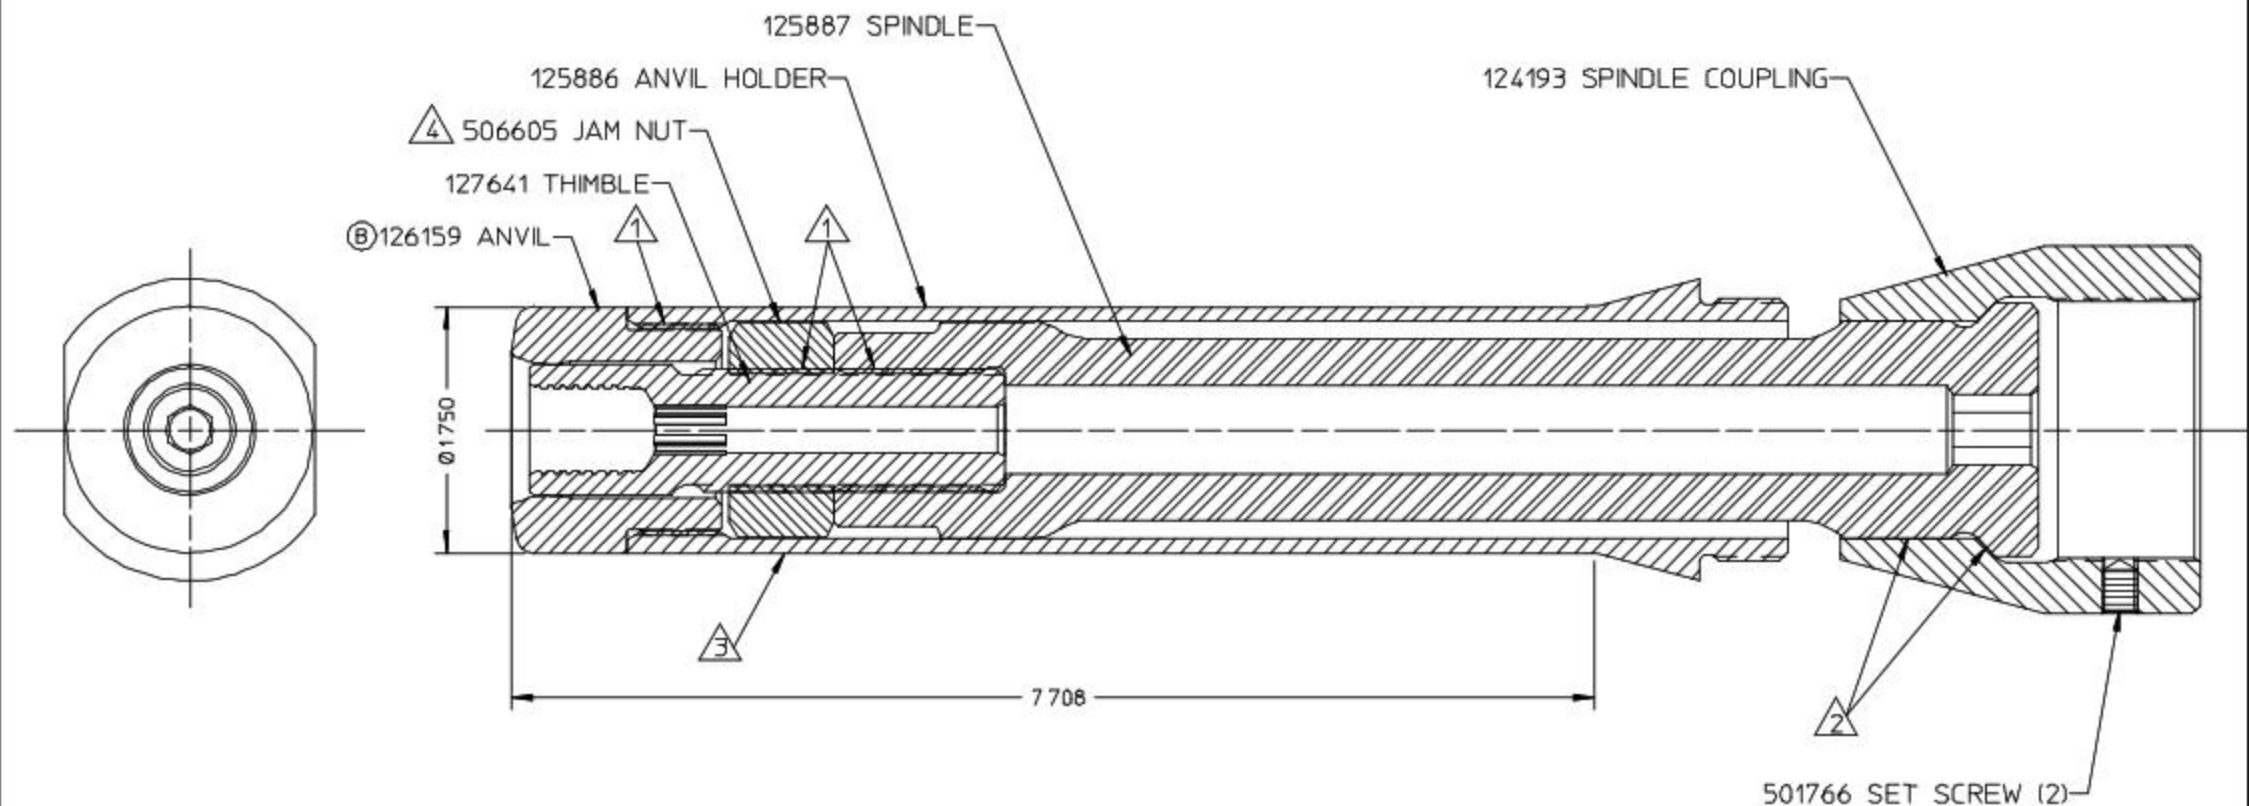

HUCK INTERNATIONAL, INC. L.S.D. 1 CORPORATE DRIVE, P.O. BOX 2270 KINGSTON, NEW YORK 12401		
ASSY, NOSE-LONG MHS-16 & HS-20 (HS52) 16mm & 5/8" HUCK-SPIN		
DET:TRK CK:	DATE: 6/8/99	SCALE: 11
FOC FAC.	B	99-7317-1