


REV	DESCRIPTION	DATE
A	RELEASE	5/2/08

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUTS TO 90-100 LB-FT.
- 5 THIS NOSE ASSEMBLY MUST BE USED WITH ACTUATOR ROD & DISK ASSEMBLY P/N 124641.
- 6 THIS NOSE IS FOR REPAIR OR LIGHT DUTY USE ONLY.

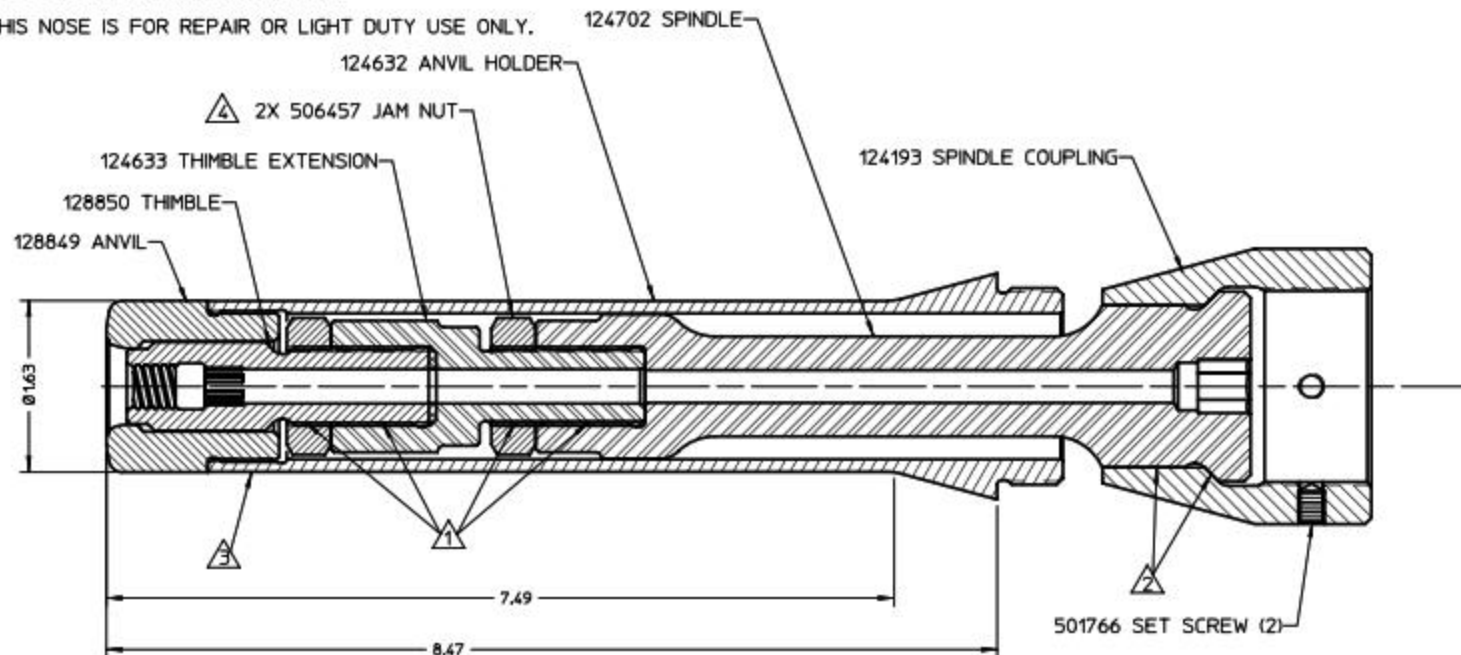

HUCK INTERNATIONAL, INC. I.S.D. 25 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401		
ASSY, NOSE, HS2-16 (HSS2) LONG REPAIR AND LIGHT DUTY USE ONLY		
DET: TRK CK:	DATE: 5/2/08	SCALE: 2:1
FOC:	B	99-7359
FAC:		