


REV	DESCRIPTION	DATE
A	RELEASE	5/2/08

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.
- 5 THIS NOSE ASSEMBLY IS FOR REPAIR OR LIGHT DUTY USE ONLY.

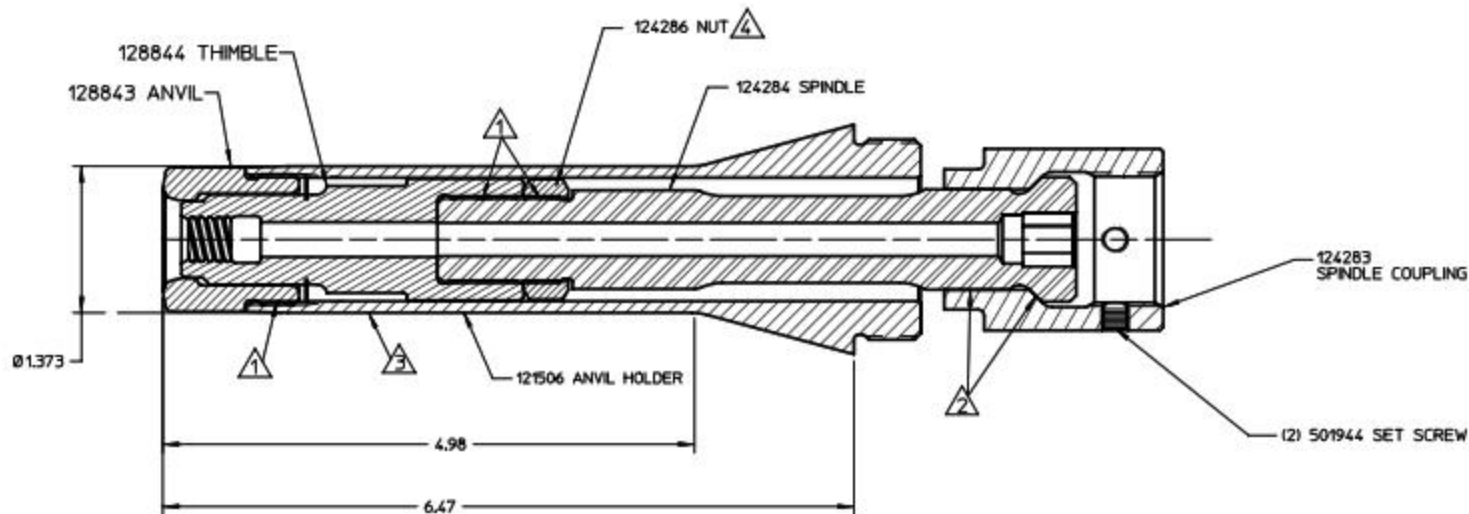

HUCK INTERNATIONAL, INC. U.S.A. 85 GRAND STREET, P.O. BOX 2270 KENILTON, NEW YORK 12401			
ASSY. NOSE HS2-16 (HS37) REPAIR AND LIGHT DUTY USE ONLY			
DET:TRK	CK:	DATE: 5/2/08	SCALE: 1:1
FOC.	B	99-7362	
FAC.			