
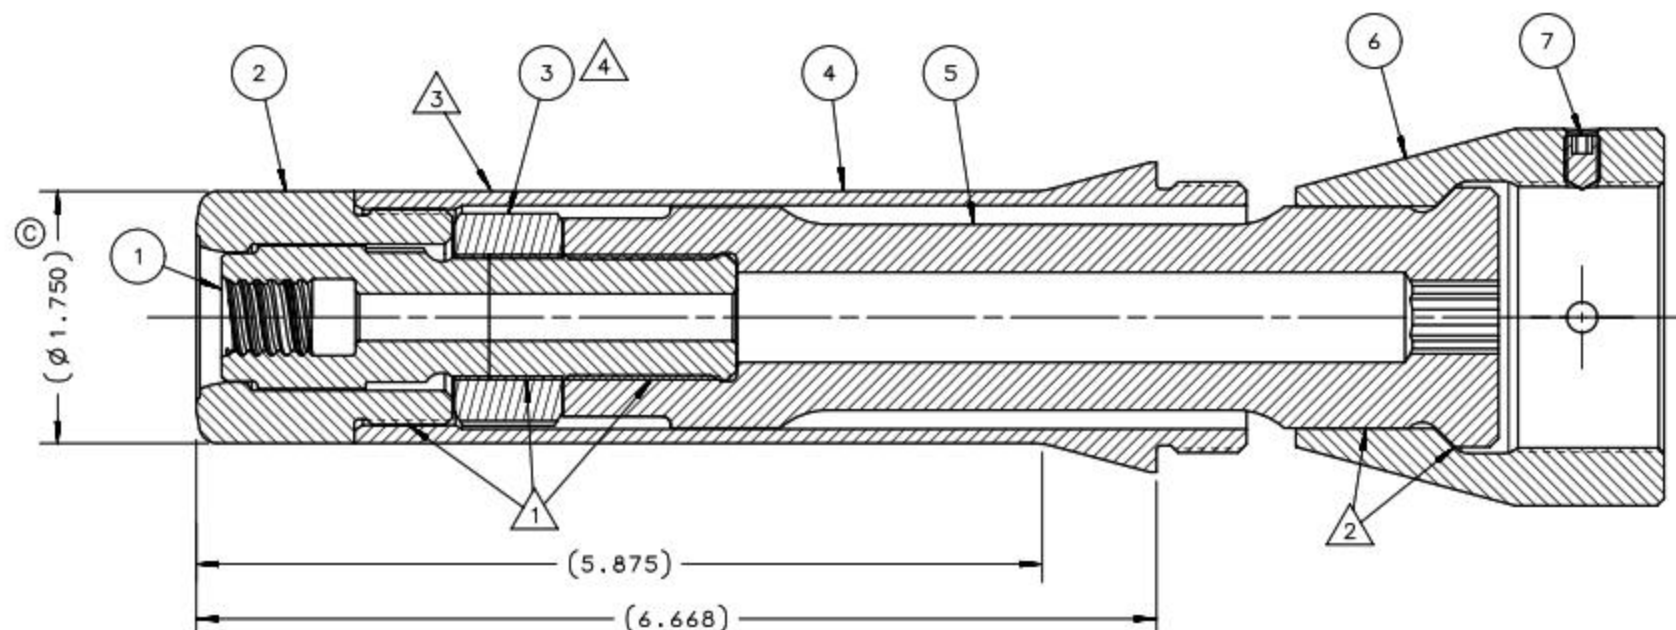


NOTES:

- 1 APPLY LOCTITE 242 P/N 505106 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.

REV	DESCRIPTION	DET	DATE
A	RELEASE		12/21/07
B	5/8" TITLEBLOCK WAS (20mm)		08/20/08
C	MODELED IN NX; REF DIM 1.750 WAS 1.812	MJK	09/17/13

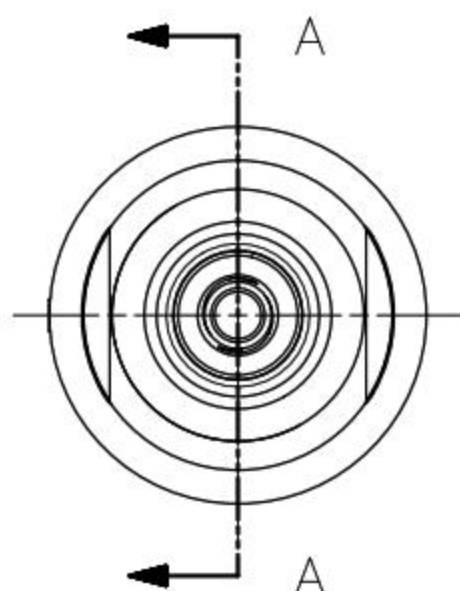

SECTION A-A

501766	2	SET SCREW	7
124193	1	SPINDLE COUPLING	6
124347	1	SPINDLE	5
124049	1	ANVIL HOLDER	4
506605	1	JAM NUT	3
128737	1	ANVIL	2
128739	1	THIMBLE	1
PART NO.	QTY	DESCRIPTION	ITEM



IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		ASSY, NOSE HS52 TOOL MHS2-16 (16mm) & HS2-20 (5/8)	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190		ENG: TRK	DATE: 12/21/07
		OK:	SCALE: 1:1
		B	99-7365