


REV	DESCRIPTION	DATE
A	RELEASE	12/21/07

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 MUST BE USED WITH 124053 ACTUATOR ROD & DISK ASSY.
- 4 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 5 TORQUE JAM NUT TO, 90-100 LB-FT.

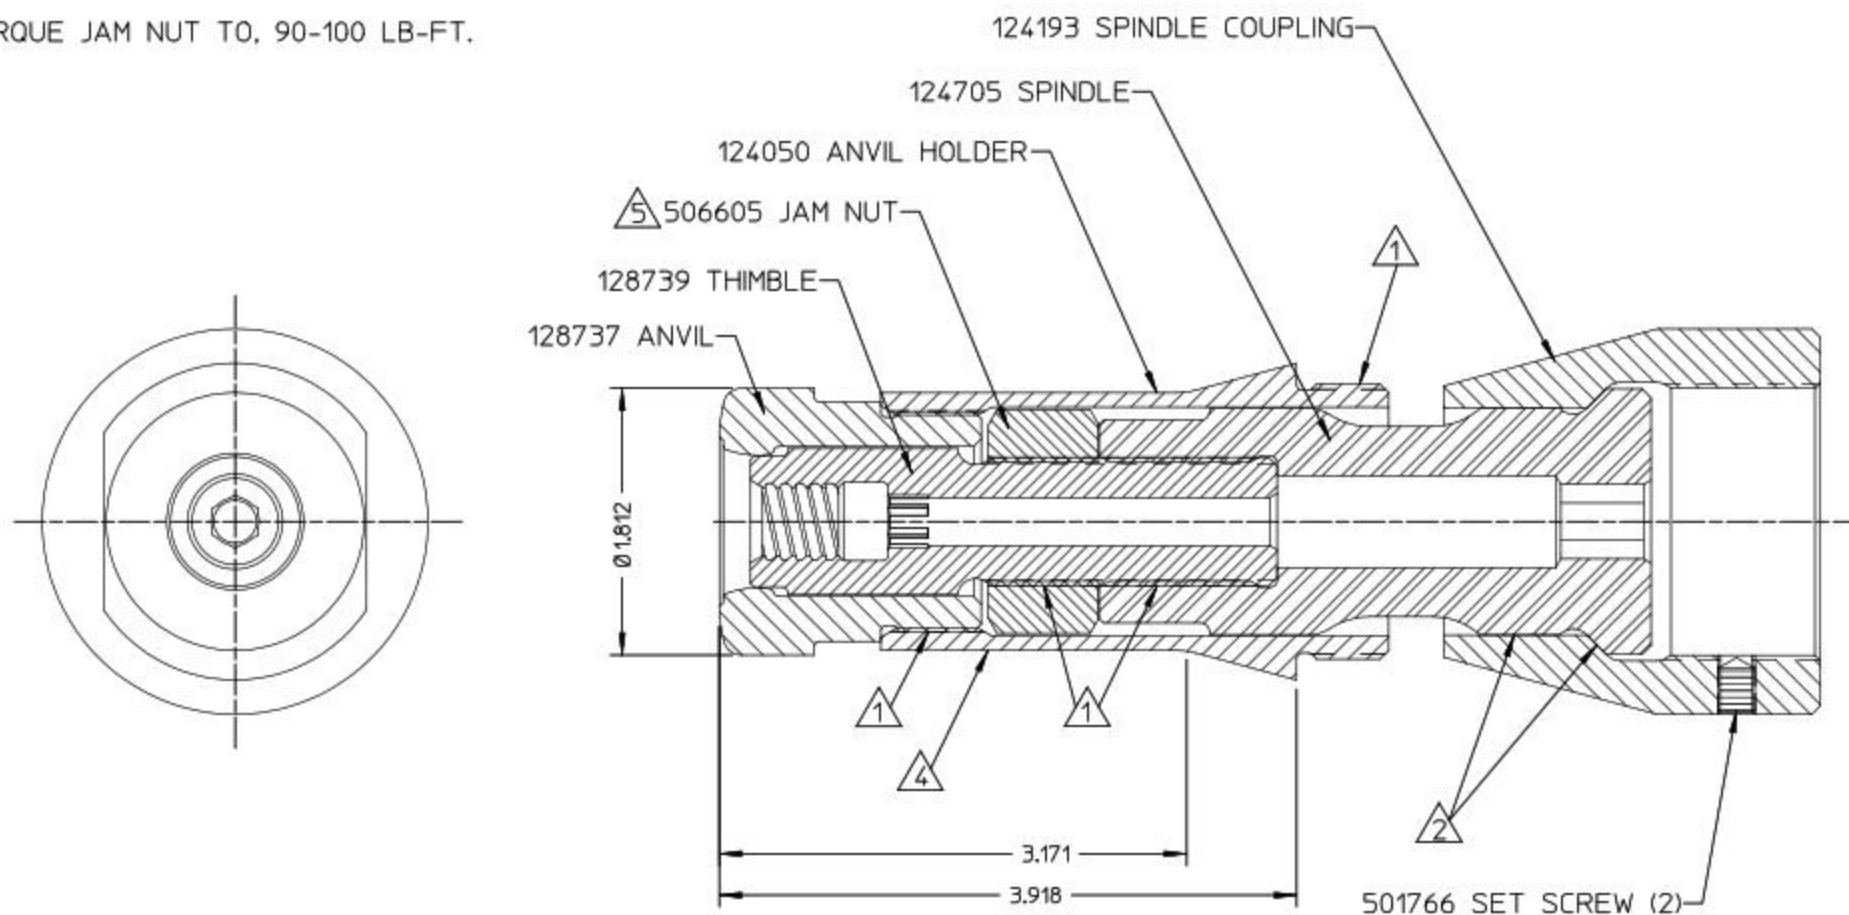

HUCK INTERNATIONAL, INC., I.S.D. 85 GRAND STREET, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
NOSE ASSEMBLY, HS52 TOOL (SHORT) MHS2-16 (16MM) & HS2-20 (20MM)			
DET:TRK	CK:	DATE: 12/21/07	SCALE: 1:1
FOC.	B	99-7366	
FAC.			