


NOTES:

- 1 APPLY LOCTITE 242 P/N 505106 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.
- 5 MUST BE USED W/ACTUATOR ROD ASSY P/N: 124641 SOLD SEPARATELY

REV	DESCRIPTION	DET	DATE
A	RELEASE	TRK	12/21/07
B	MODELED IN NX	MJK	06/03/14

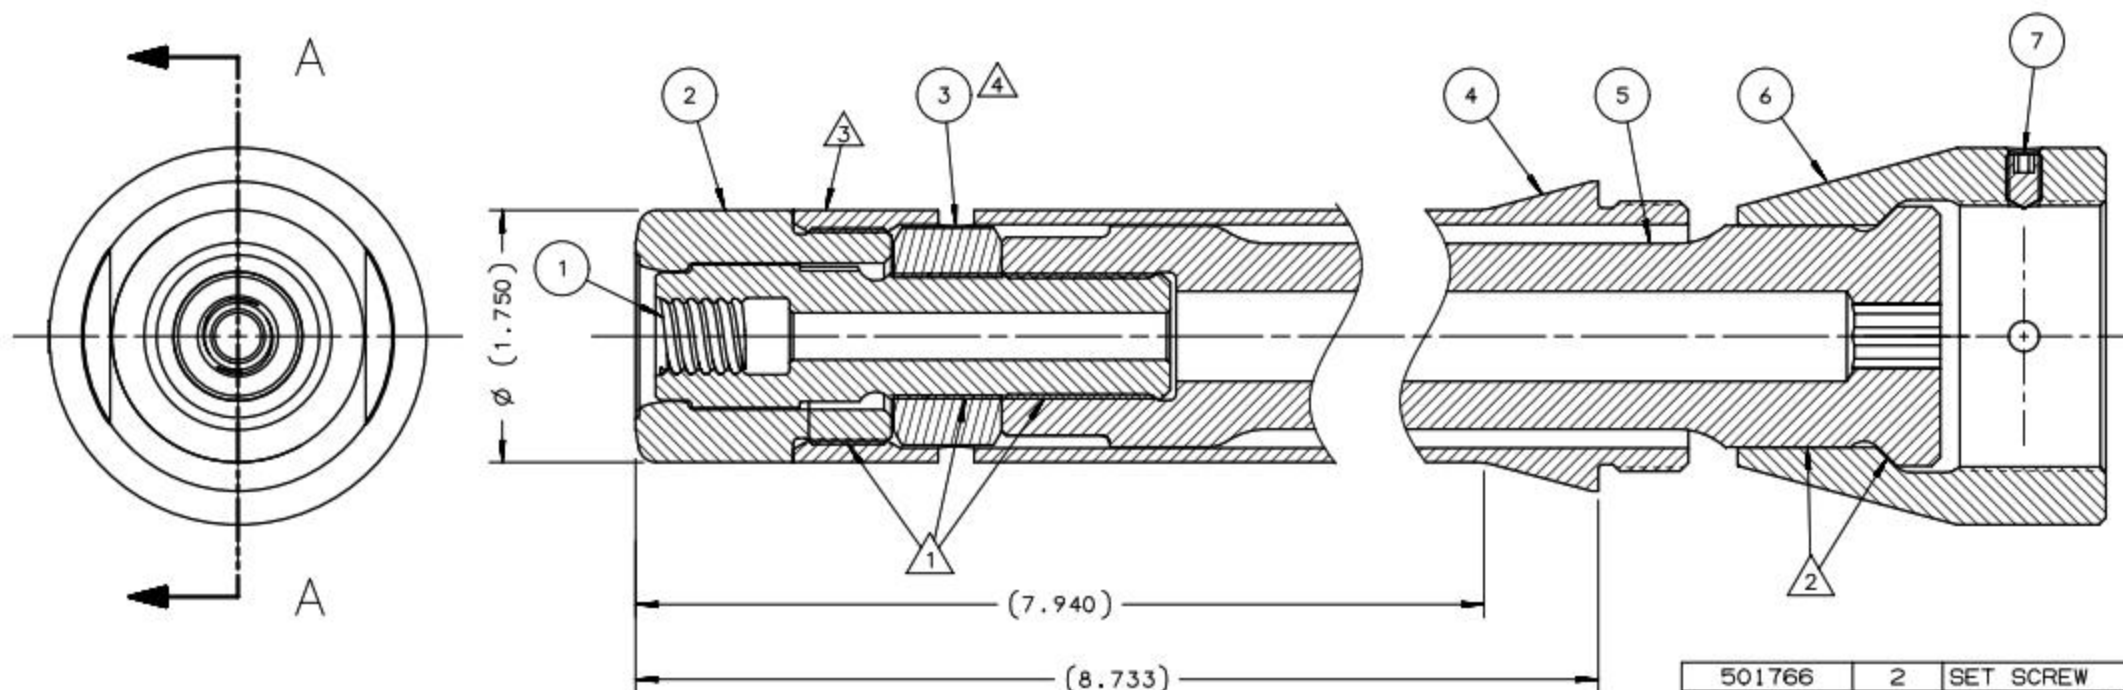

SECTION A-A

501766	2	SET SCREW	7
124193	1	SPINDLE COUPLING	6
125887	1	SPINDLE	5
125886	1	ANVIL HOLDER	4
506605	1	JAM NUT	3
128737	1	ANVIL	2
128739	1	THIMBLE	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ ETCH	HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401		
ITAR/ECCN: EAR99	NOSE, HS52, 16MM, -20HS2 (5/8")		
SCH B#: 8467.99.0190	FINAL ASSY: HS52		
HTS: 8467.99.0190	B	DATE: 12/21/07	SCALE: 1:1
		99-7367	