


NOTES:

- 1 APPLY LOCTITE 242 P/N 505106 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.
- 5 MUST BE USED W/ACTUATOR ROD ASSY P/N: 126045 SOLD SEPARATELY

REV	DESCRIPTION	DET	DATE
A	RELEASE		12/21/07
B	MODELED IN NX	MJK	06/02/14

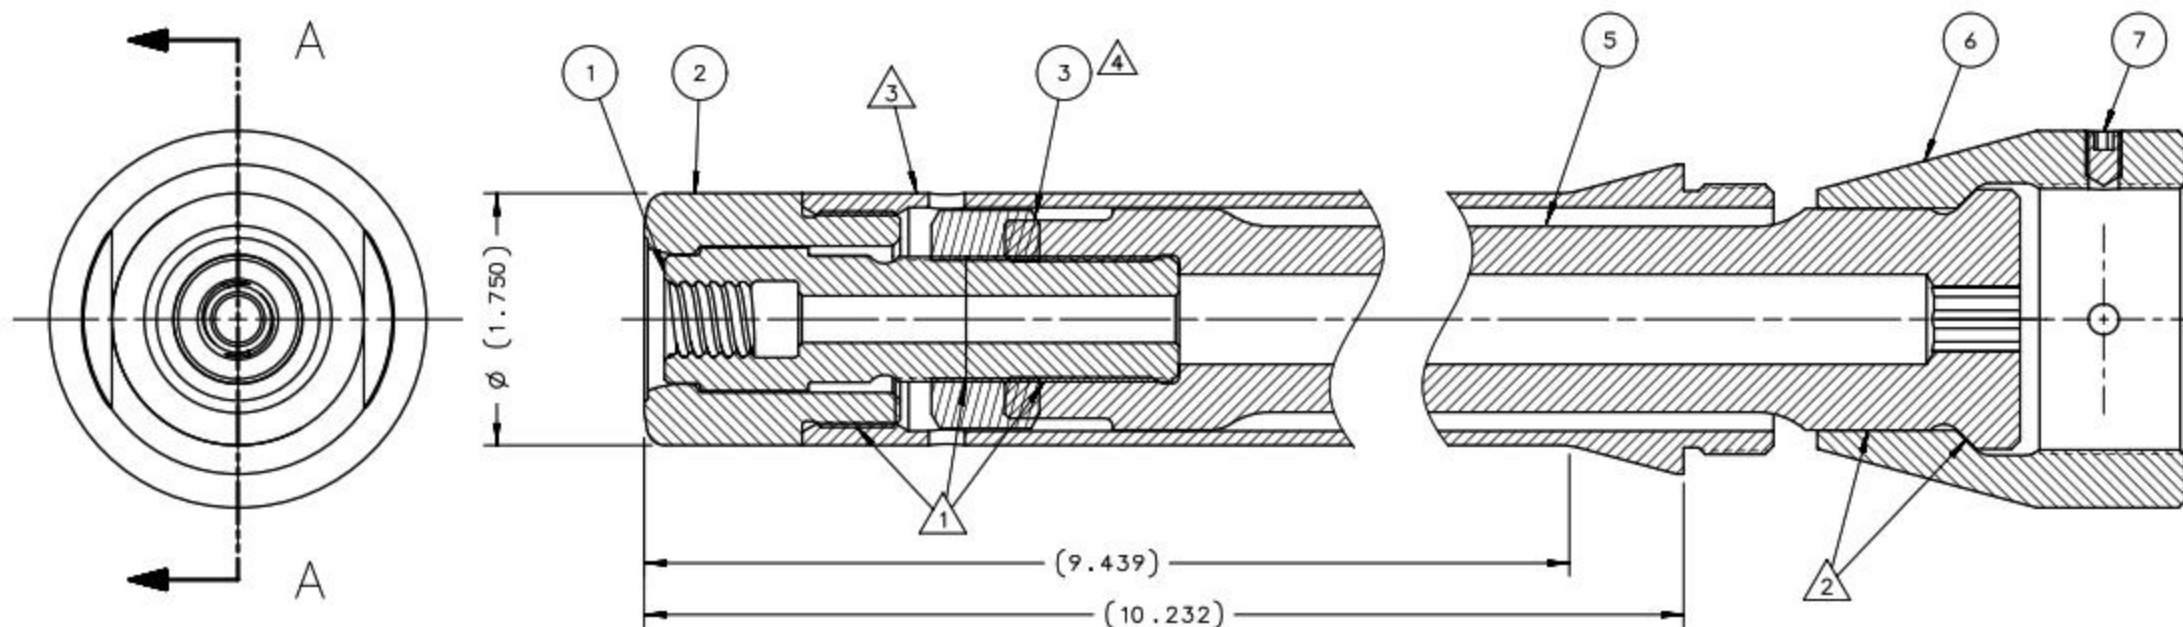

SECTION A-A

501766	2	SET SCREW	7
124193	1	SPINDLE COUPLING	6
126046	1	SPINDLE	5
126047	1	ANVIL HOLDER	4
506605	1	JAM NUT	3
128737	1	ANVIL	2
128739	1	THIMBLE	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE, HS52, 16MM, -20HS2 (5/8") XLONG	
SCH B#: 8467.99.0190		FINAL ASSY: HS52	
HTS: 8467.99.0190		DATE: 12/21/07	SCALE: 1:1
B		99-7368	