


REV	DESCRIPTION	DATE
B	RELEASE	11/23/98
C	ADDED NOTE 5	3/1/00
D	126154 WAS 121516	07/10/00
E	127634 WAS 124285	9/20/04

NOTES

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUT TO 90-100 LB-FT
- 5 MUST BE USED WITH ACTUATOR ROD P/N 126102 PURCHASED SEPARATELY

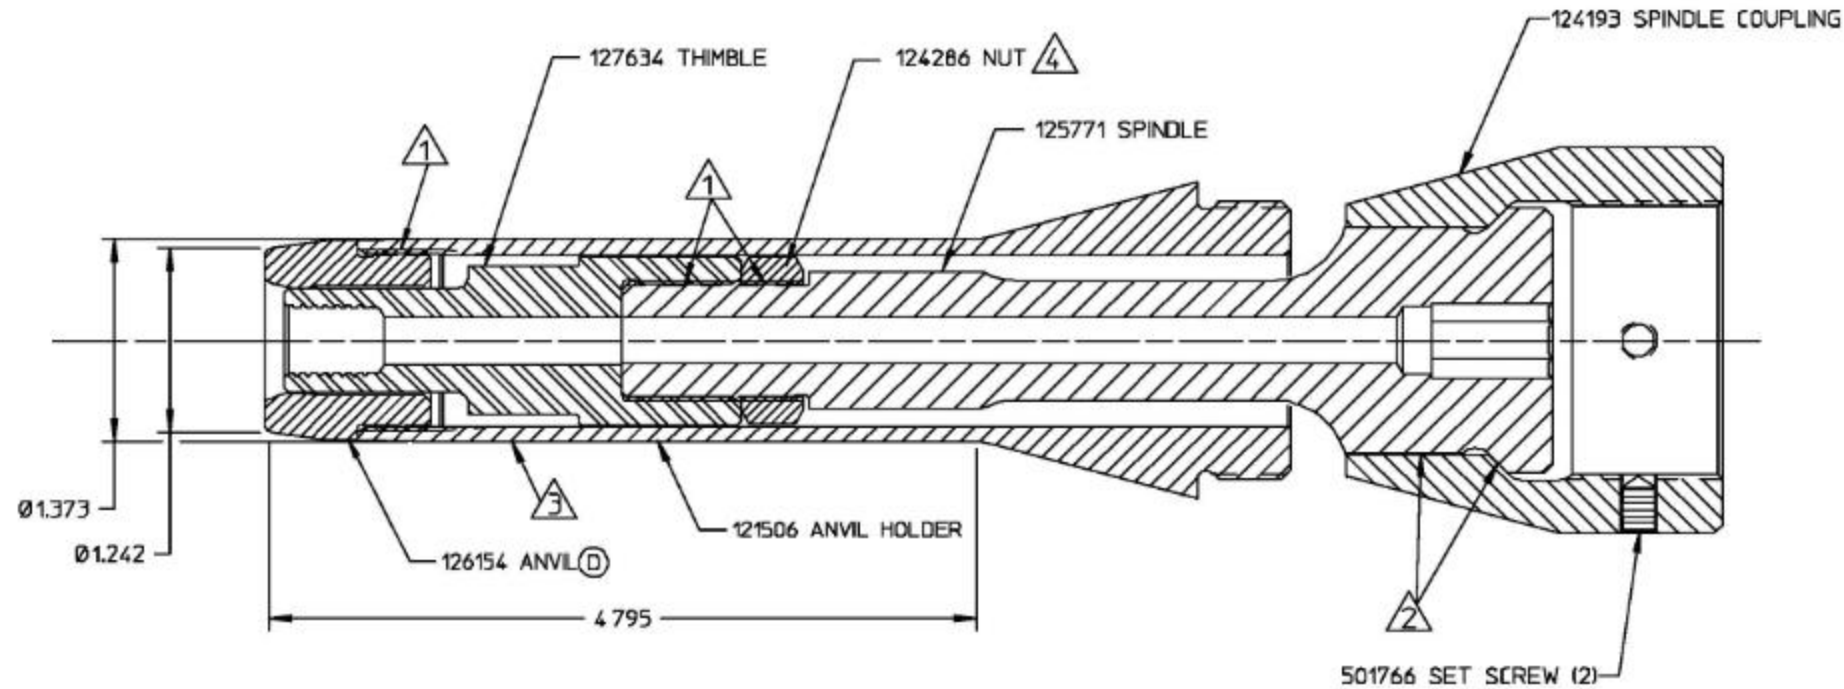

HUCK INTERNATIONAL, INC., I.E.D.
1 CORPORATE DRIVE
KINGSTON, NEW YORK 12401

ASSY, NOSE MHS-12 (HS52)
12mm HUCK-SPIN

DET-TRK	CK	DATE:11/23/98	SCALE: 1:1
FOC.	B	99-7413-1	
FAC			