


NOTES

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUT TO 90-100 LB-FT

REV	DESCRIPTION	DATE
A	RELEASE, REPLACES P/N 99-3454-1	09/01/95
B	Ø1625 WAS 1710; Ø1481 WAS 1464; 5356 WAS 5512	09/01/95
C	REMOVED 121508, 501027	06/11/96
D	126155 WAS 121532	07/10/00
E	127635 WAS 124300	9/20/04

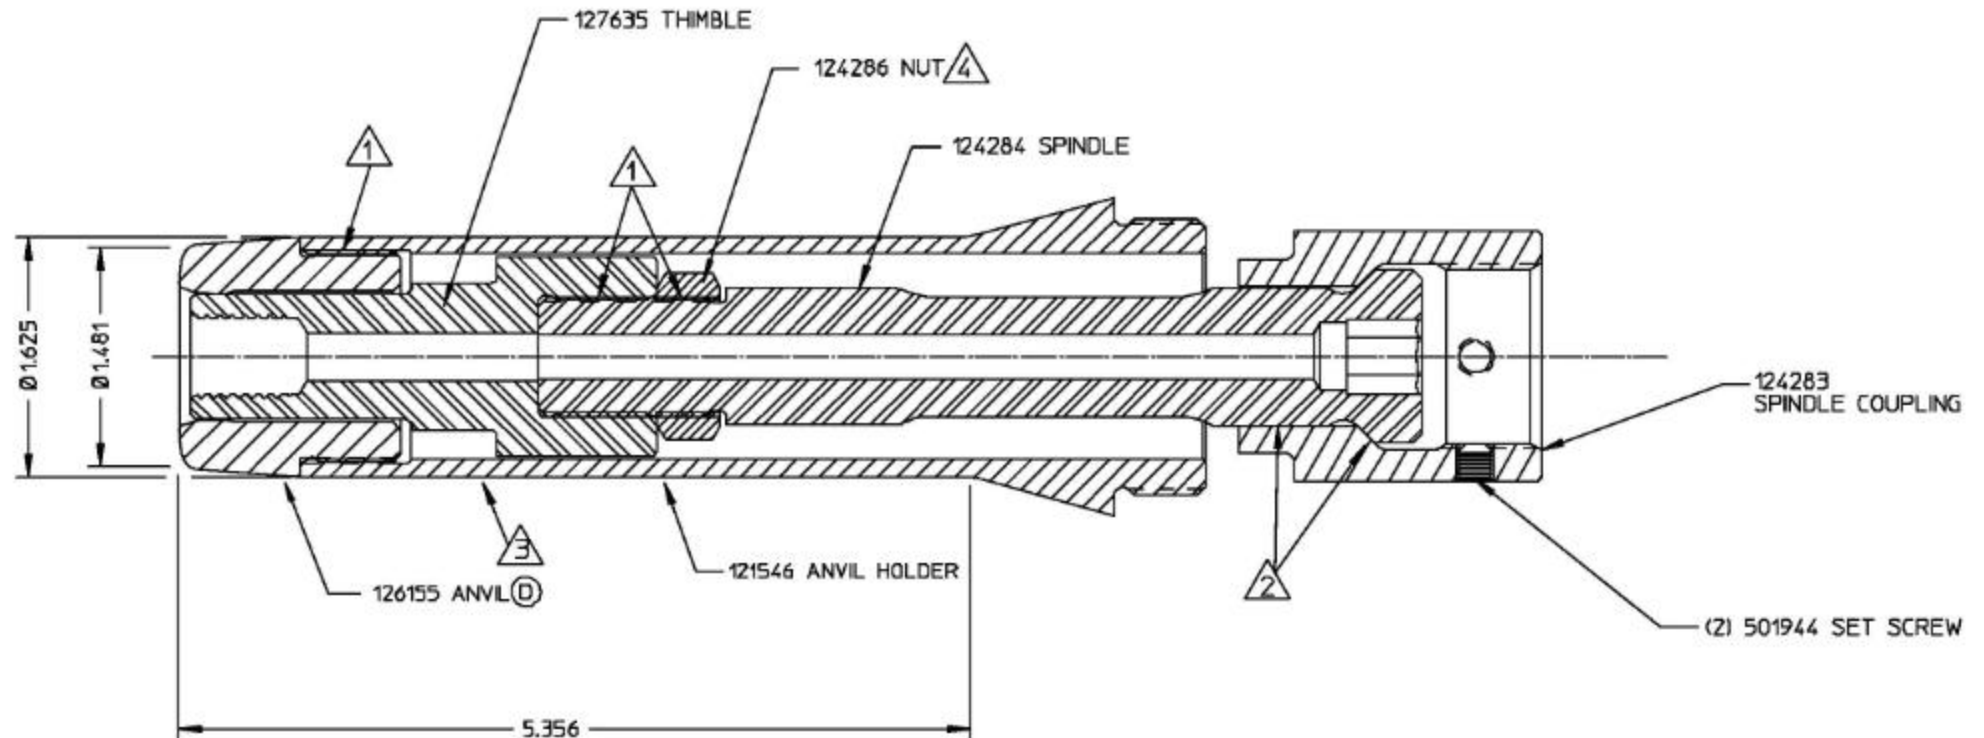

HUCK INTERNATIONAL, INC., I.E.D.
85 GRAND STREET, P.O. BOX 2270
KINGSTON, NEW YORK 12401

ASSY, NOSE MHS-14 (HS37)
14mm HUCK-SPIN

DET:KSJ	CK:	DATE: 9/01/95	SCALE:1/1
FOC.	B	99-7414-1	
FAC			