


REV	DESCRIPTION	DATE
A	NEW RELEASE	07/10/00
B	127635 WAS 124300	9/20/04

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL
- 4 TORQUE JAM NUT TO 90-100 LB-FT
- 5 MUST BE USED WITH 124605 ACTUATOR ROD ASSEMBLY (NOT INCL).

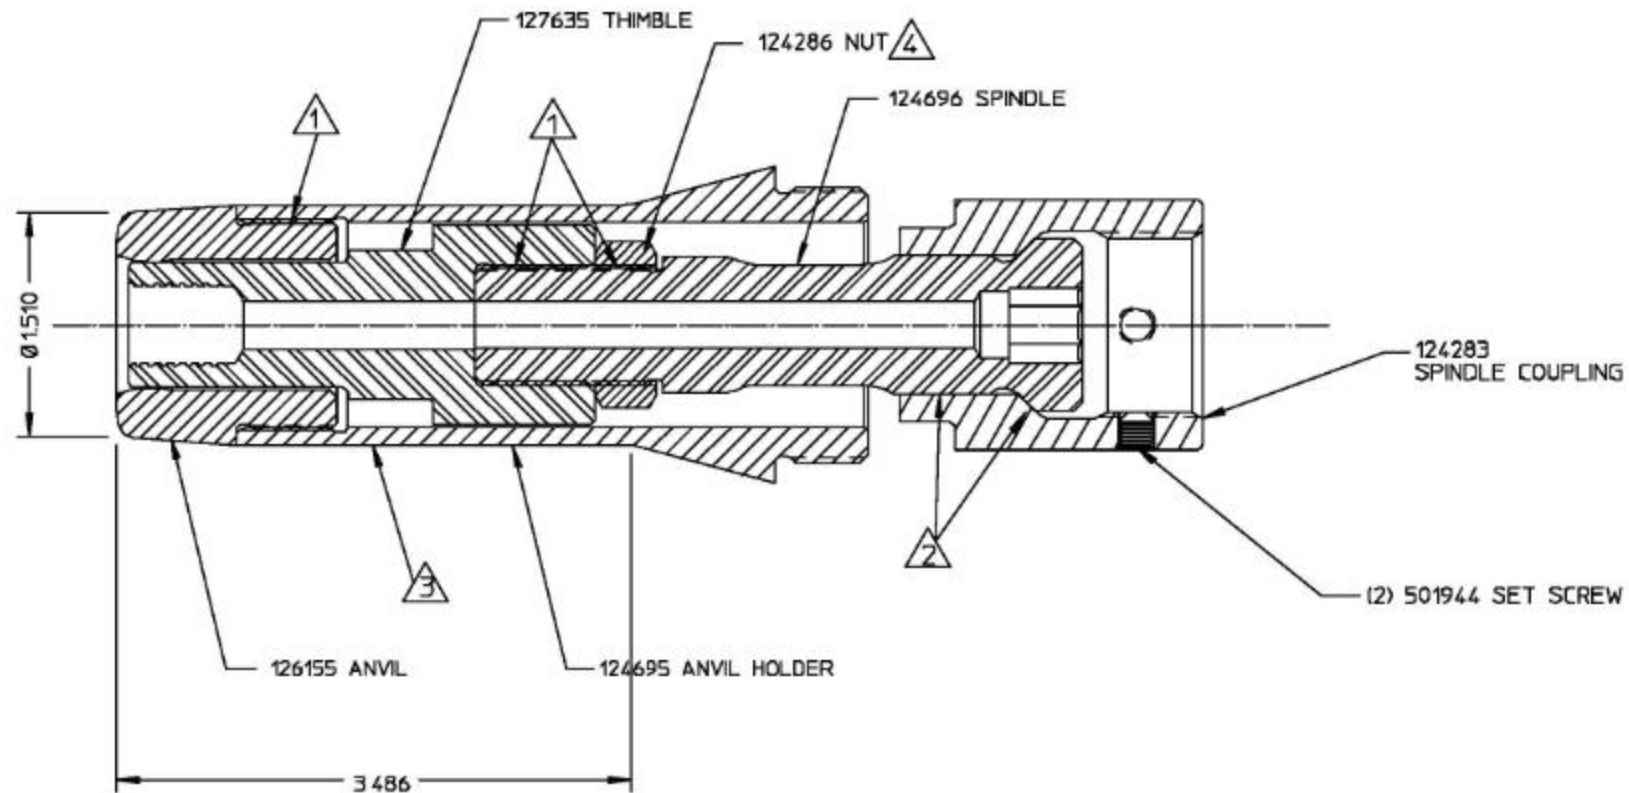

HUCK INTERNATIONAL, INC., I.E.D.
85 GRAND STREET, P.O. BOX 2270
KINGSTON, NEW YORK 12401

ASSY, NOSE MHS-14 (HS37)
14mm HUCKSPIN

DET: WV	CK:	DATE: 7/10/00	SCALE: 1/1
FOC.	B	99-7416-1	
FAC			