


REV	DESCRIPTION	DET	DATE
A	RELEASE	EL	10/20/15

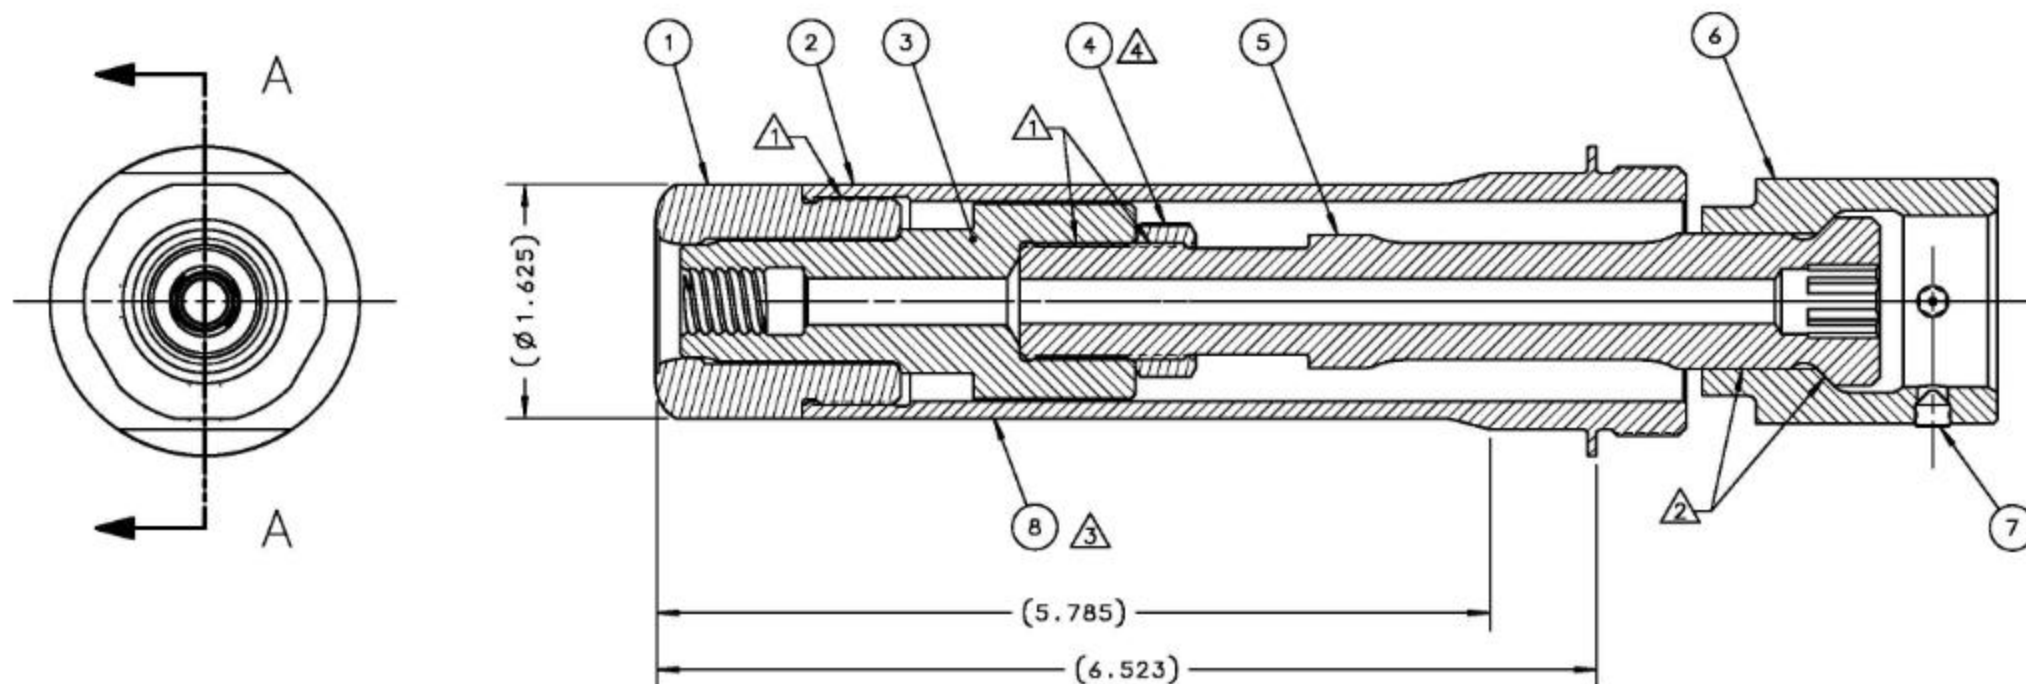

SECTION A-A

NOTE:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 ADHERE WARNING STICKER TO ANVIL HOLDER APPROXIMATELY WHERE SHOWN. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 FT/LBS

590273	1	STICKER-WARNING	8
501944	2	SSCR SOC CUP .25-28X .25 LW	7
124283	1	COUPLING, SPINDLE, HS37	6
124284	1	SPINDLE, M12 HSPIN	5
124286	1	LOCKNUT, THIMBLE	4
130934	1	THIMBLE	3
121546	1	HOLDER, ANVIL, HSPIN	2
128683	1	ANVIL, MBTC-R14	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY MHS2-14 (14mm) HS37 TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190		DATE: 10/20/15	SCALE: 1:1
		B	99-7470