


NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO THIMBLE BEFORE ASSEMBLY TO SPINDLE.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.

REV	DESCRIPTION	DATE
A	RELEASE, FORMERLY PR2657-M12CC	10/26/06
B	CORRECTED PART CALL OUTS ON DRAWING 128443 SPINDLE BOLT WAS 127218 128327 SPINDLE WAS 128330 ADDED 121343-57 LOCKSCREW	04/12/07
C	P/N 128325 WAS 128235	5/5/10

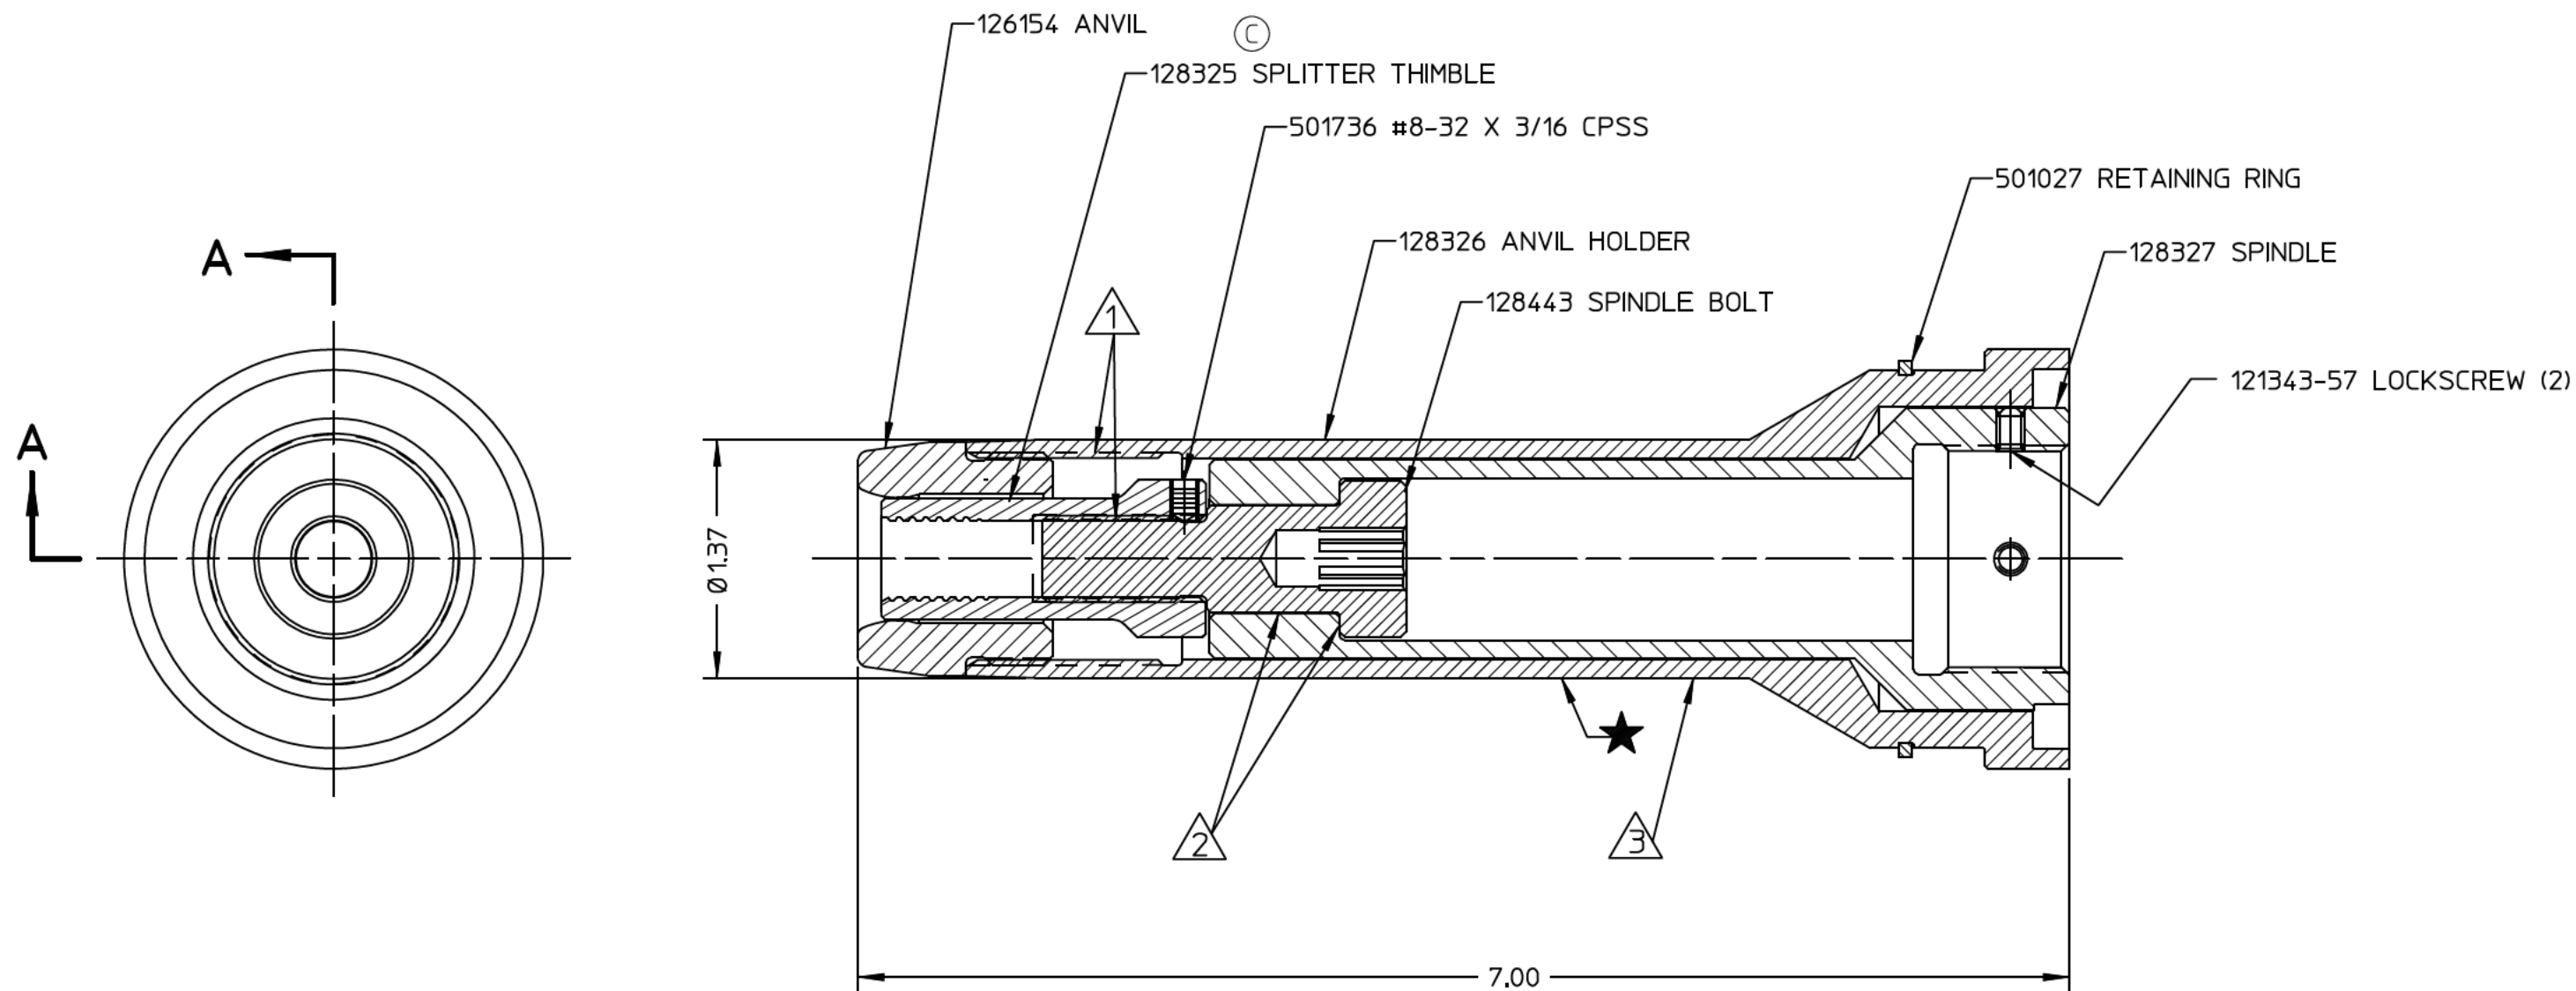

HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DRIVE, P.O. BOX 2270 KINGSTON, NEW YORK 12401			
ASSY, NOSE - 2624HS MHS-12 (12MM) HUCKSPIN			
DET: CHR	CK:	DATE: 04/12/07	SCALE: FULL
FOC.	B	99-7510	
FAC.			