


NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO THIMBLE BEFORE ASSEMBLY TO SPINDLE.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.

REV	DESCRIPTION	DATE
A	RELEASE, FORMERLY PR2657-M12CC	10/26/06
B	CORRECTED PART CALL OUTS ON DRAWING 128443 SPINDLE BOLT WAS 127218 128327 SPINDLE WAS 128330 ADED 121343-57 LOCKSCREW	04/12/07

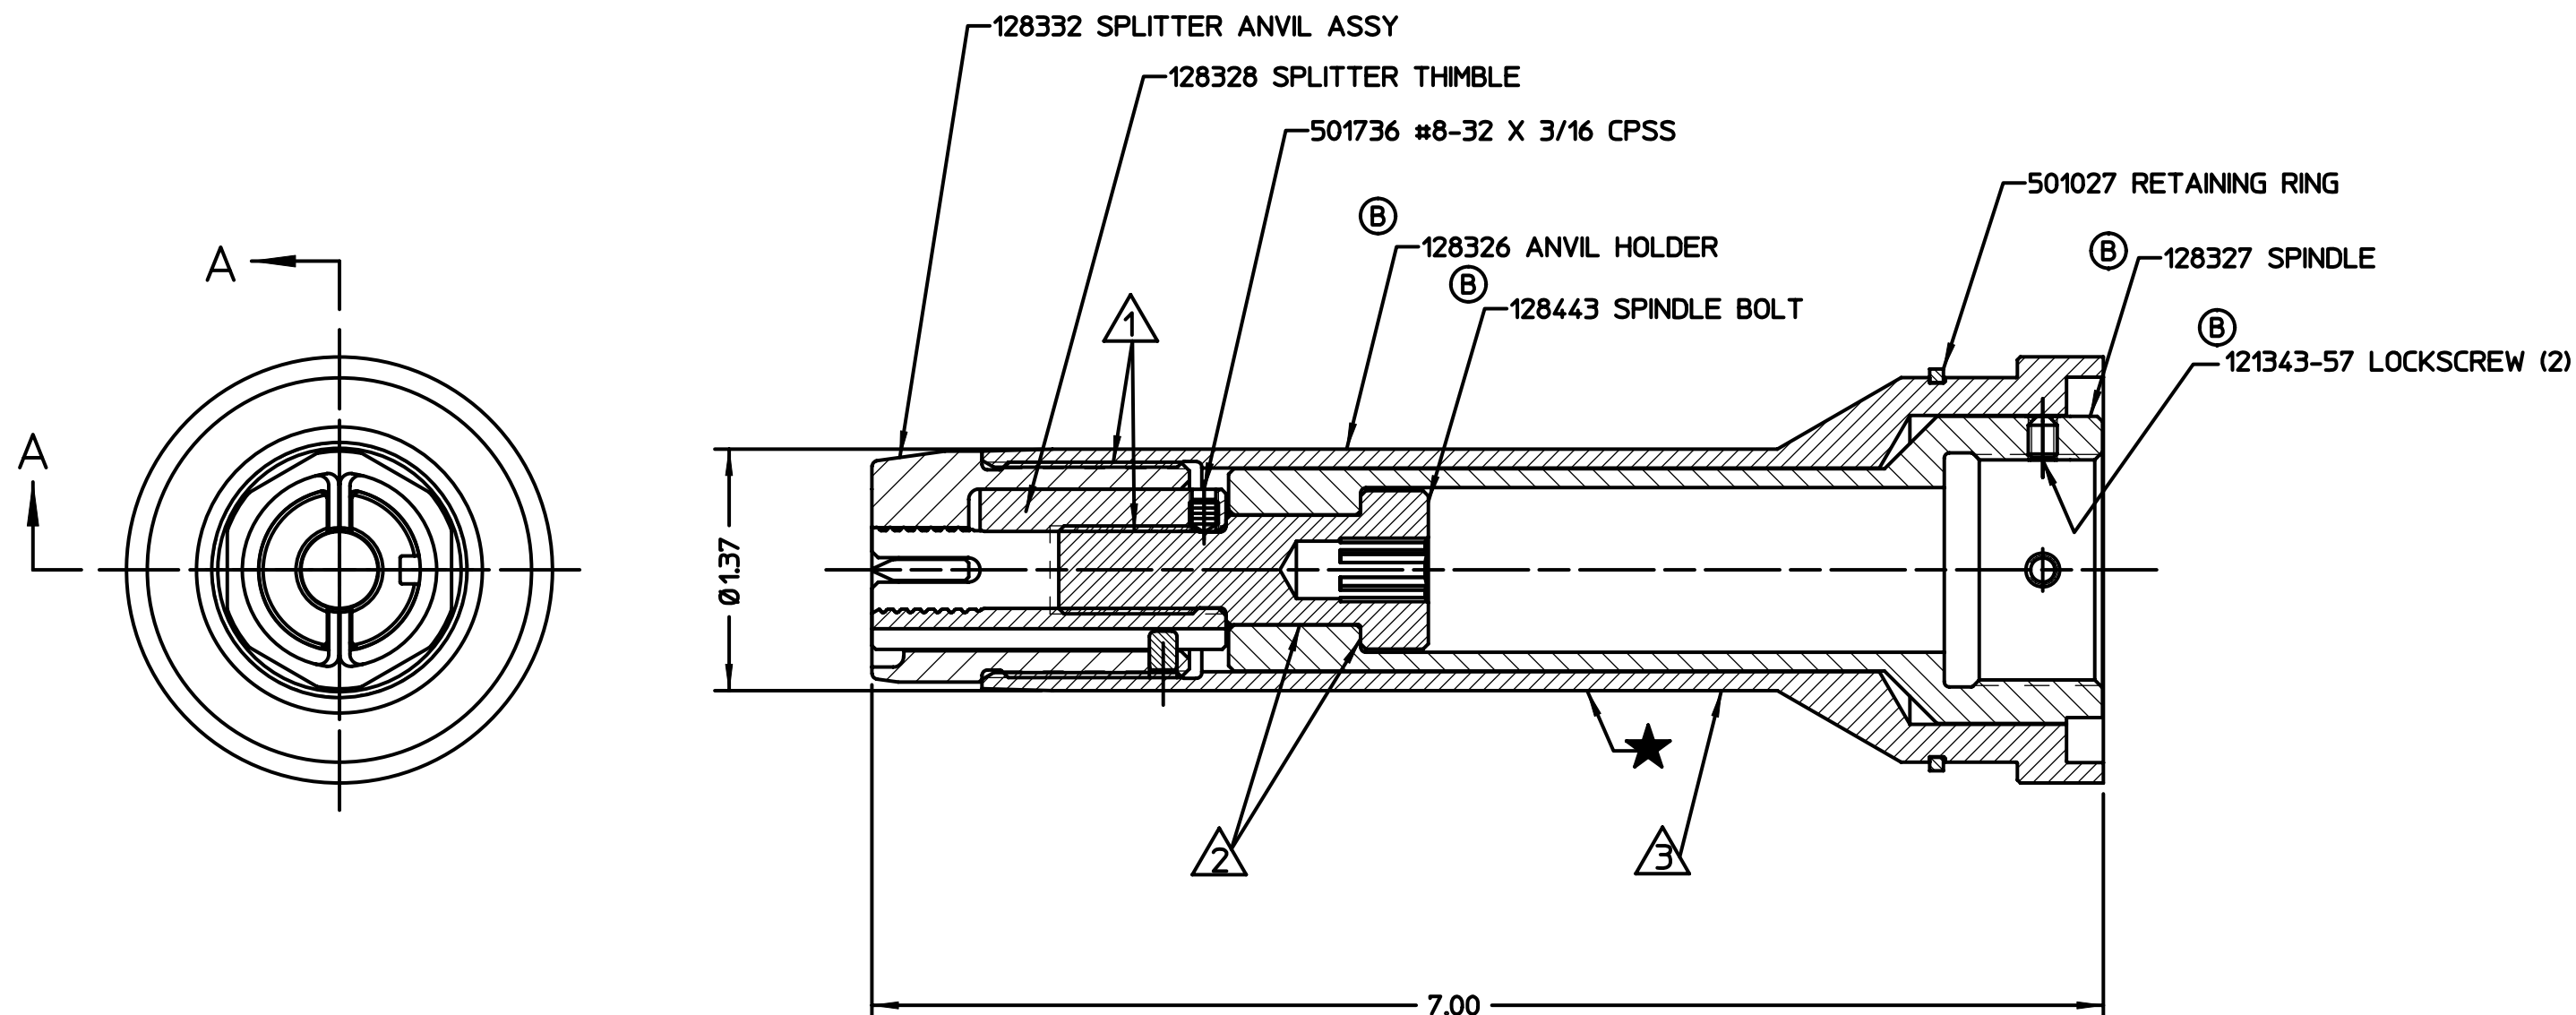

HUCK INTERNATIONAL, INC., I.S.D.
1 CORPORATE DRIVE, P.O. BOX 2270
KINGSTON, NEW YORK 12401

ASSY, SPLITTER NOSE - 2624HS
MHS-12 (12MM) HUCKSPIN

DET: CHR CK: DATE: 04/12/07 SCALE: FULL

FOC.
FAC.

B

99-7510CC