


REV	DESCRIPTION	DATE
A	RELEASE	8/25/03

NOTES:

- 1 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 2 APPLY GREASE P/N 620030 TO SPINDLE BEFORE ASSEMBLY TO SPINDLE COUPLING.
- 3 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 4 TORQUE JAM NUT TO 90-100 LB-FT.

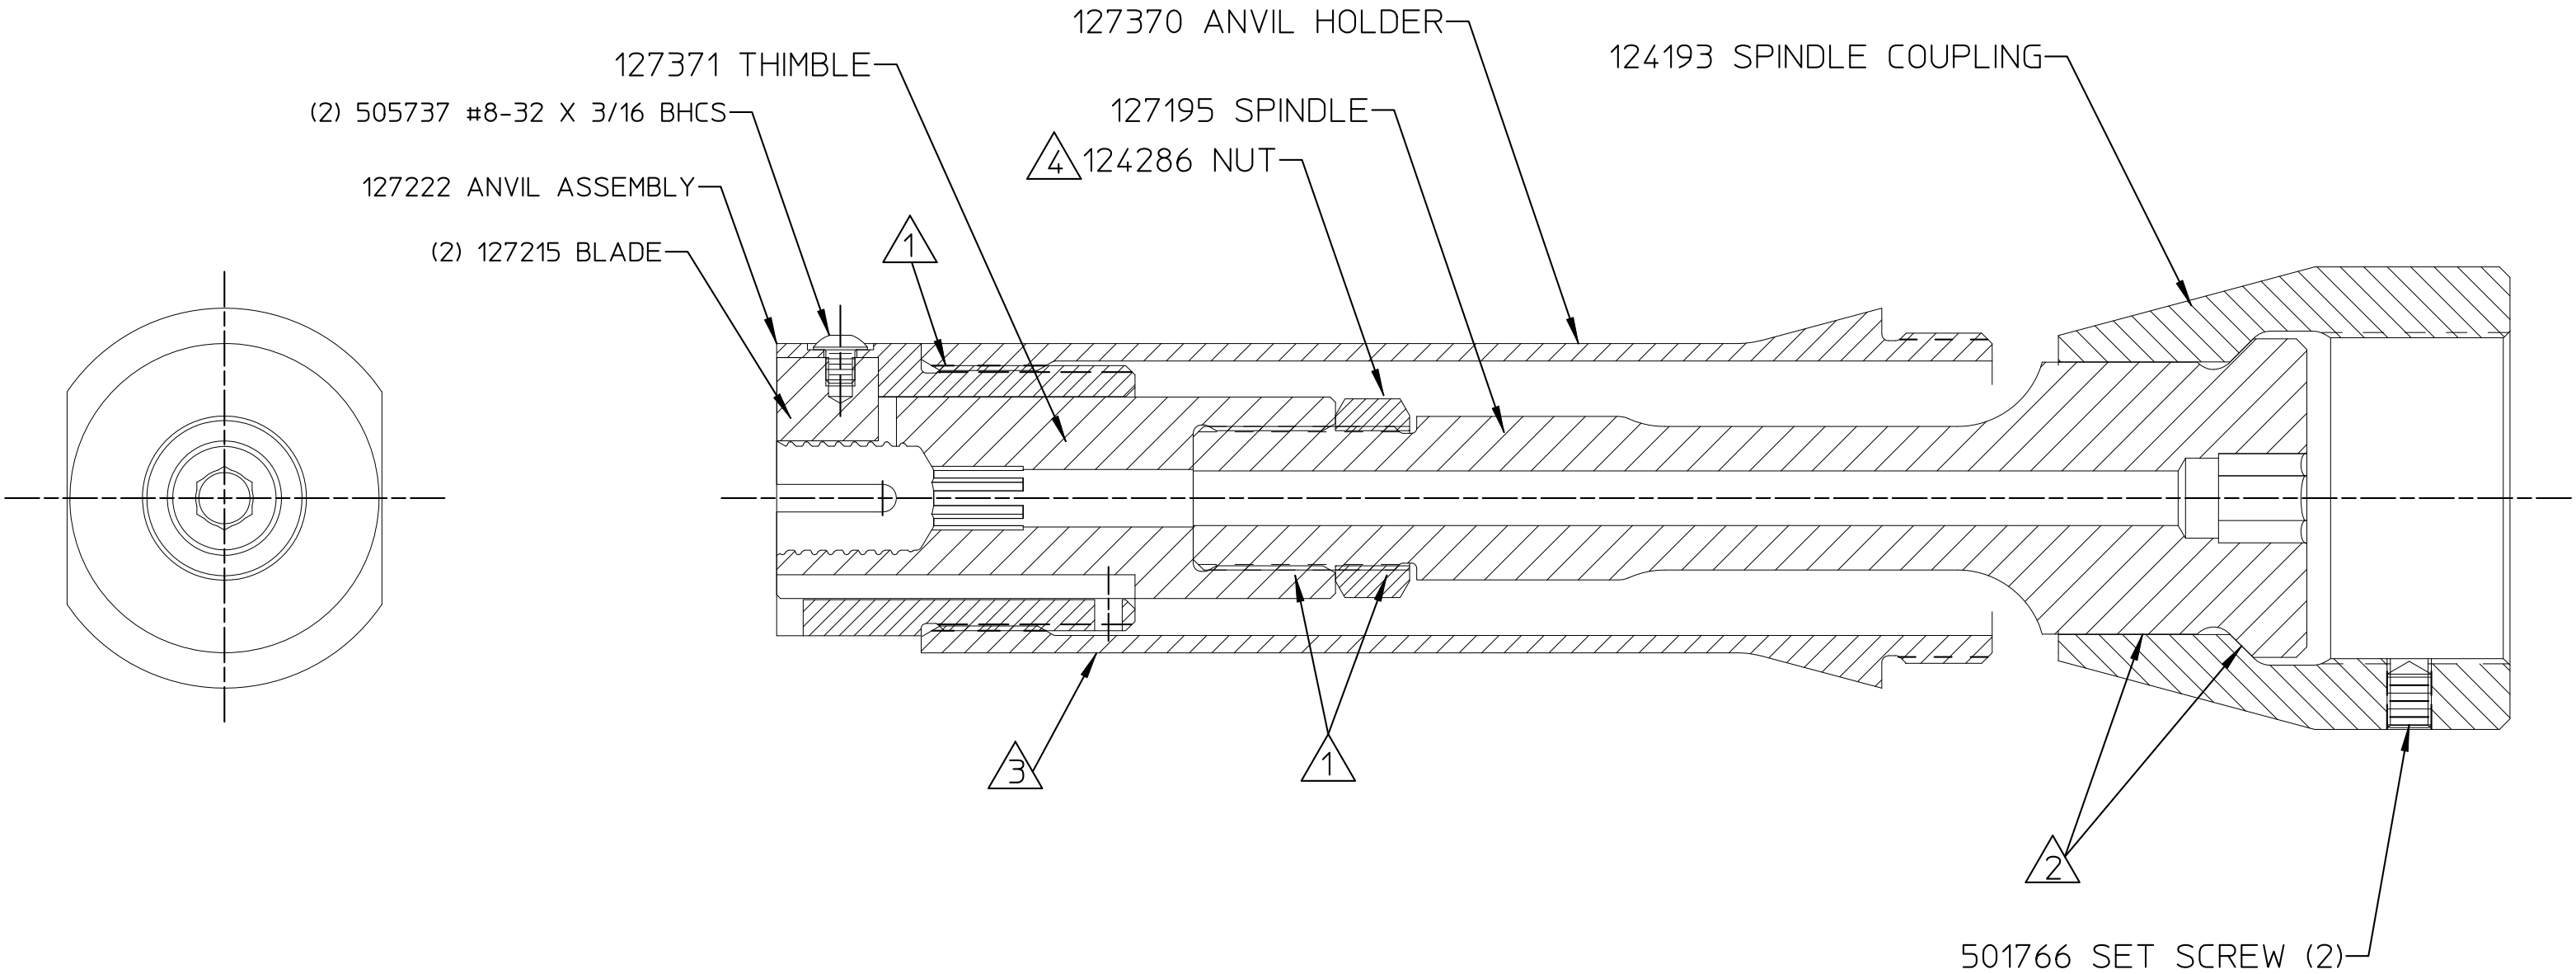

HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DRIVE KINGSTON, NEW YORK 12401			
ASSY, SPLITTER NOSE (HS52) 16mm & 5/8" HUCK-SPIN			
DET:TRK	CK:	DATE: 8/25/03	SCALE: 1:1
FOC.	B	99-7551CC	
FAC.			