


REV	DESCRIPTION	DATE
A	RELEASE	5/9/06

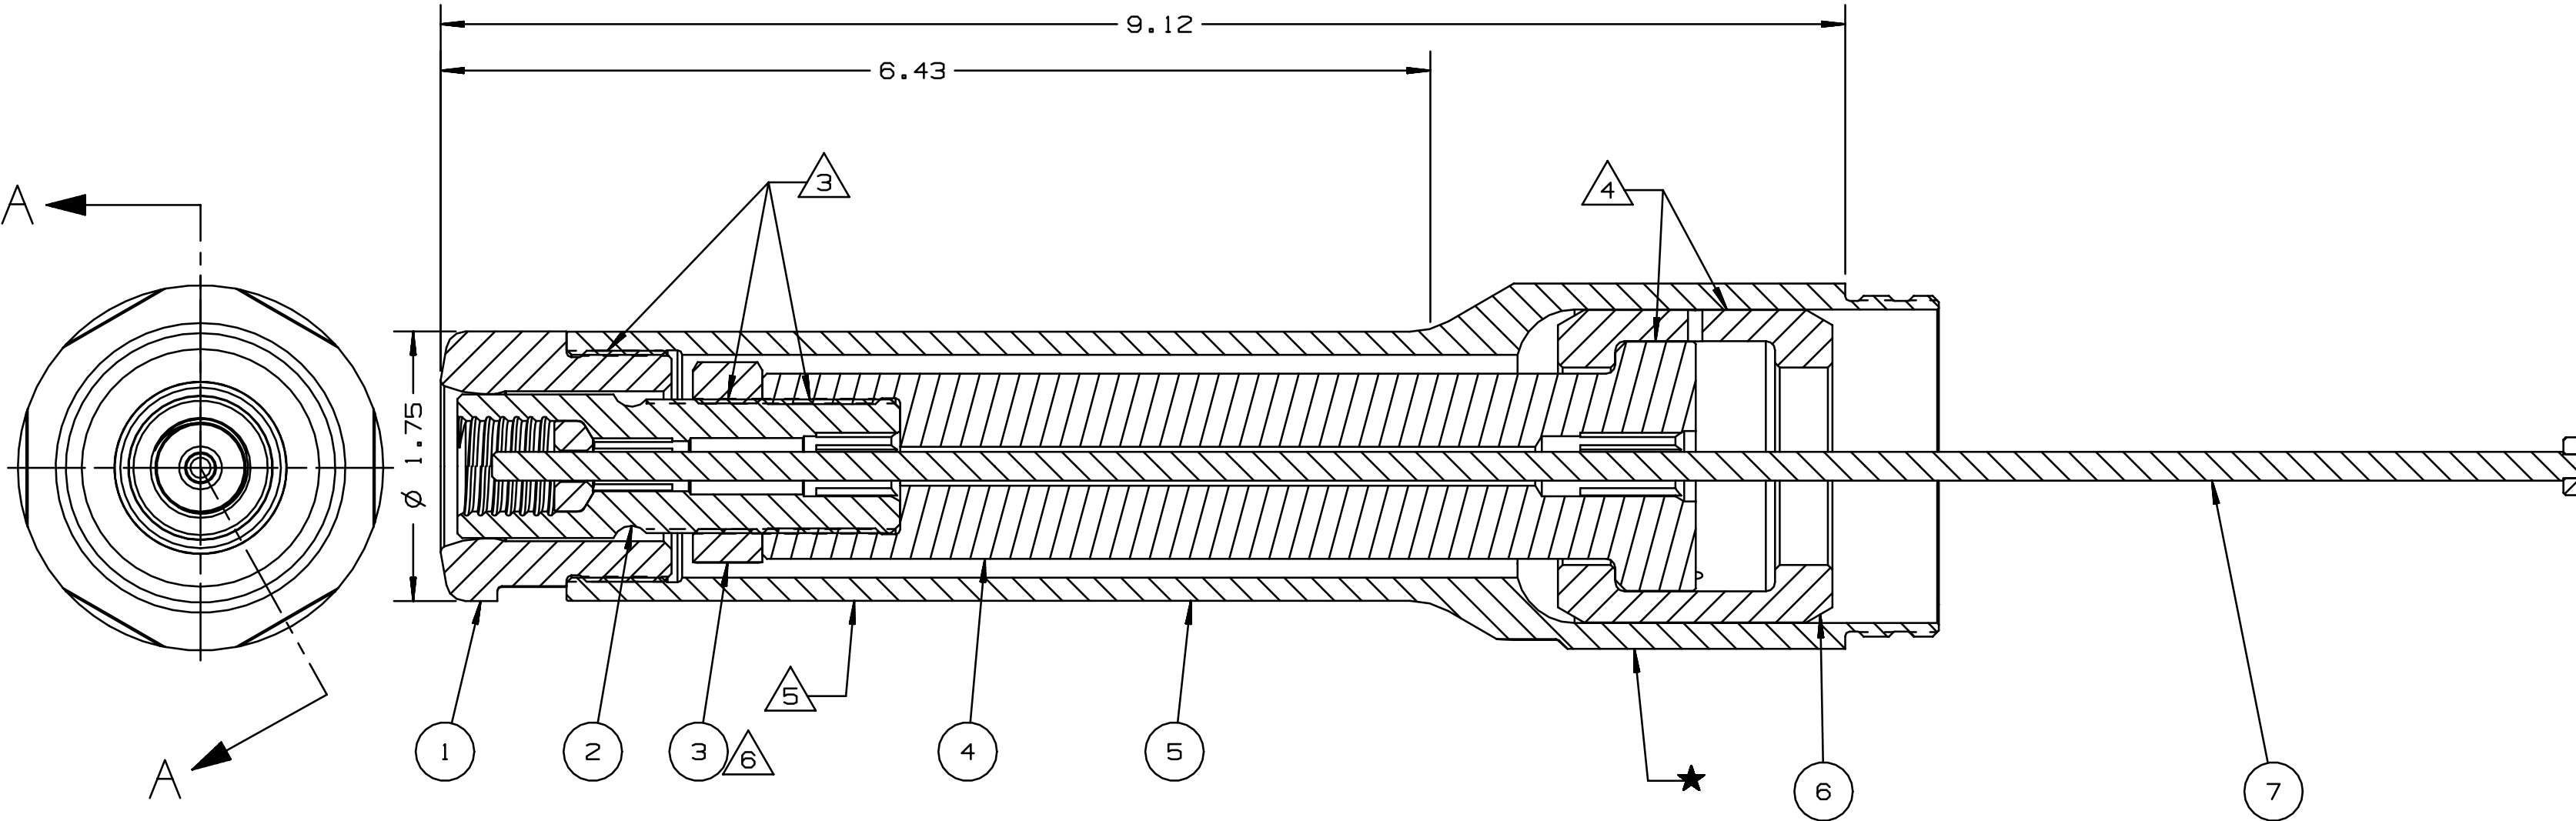

SECTION A - A

NOTES:

- 1 ETCH PER HUCK SPEC 42-311 ★
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- 5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6 TORQUE TO 90-100 LBS-FT.

127577-5	1	ACTUATOR ROD ASSY	7
127570	1	SPLIT RINGS	6
127574-5	1	ANVIL HOLDER	5
127573-5	1	THIMBLE NUT	4
127774	1	JAM NUT	3
127771	1	THIMBLE ASSY	2
126159	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM

HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DR., P.O. BOX 2270 KINGSTON, NEW YORK 12401			
NOSE ASSEMBLY MHS-16 & HS-20 HSSFT-M16 TOOL			
DET: TRK	CK:	DATE: 5/9/06	SCALE: 1:1
FOC. FAC.	B	99-7602-5	