


NOTES:

- 1 ETCH PER HUCK SPEC 42-311
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4 APPLY ANTI-SEIZE LUBRICANT P/N 508183 TO SPLIT RINGS AND ANVIL.
- 5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6 TORQUE TO 90-100 LBS-FT.
- 7. THIS NOSE FOR LIGHT DUTY USE ONLY

REV	DESCRIPTION	DATE
A	RELEASE	6/24/08

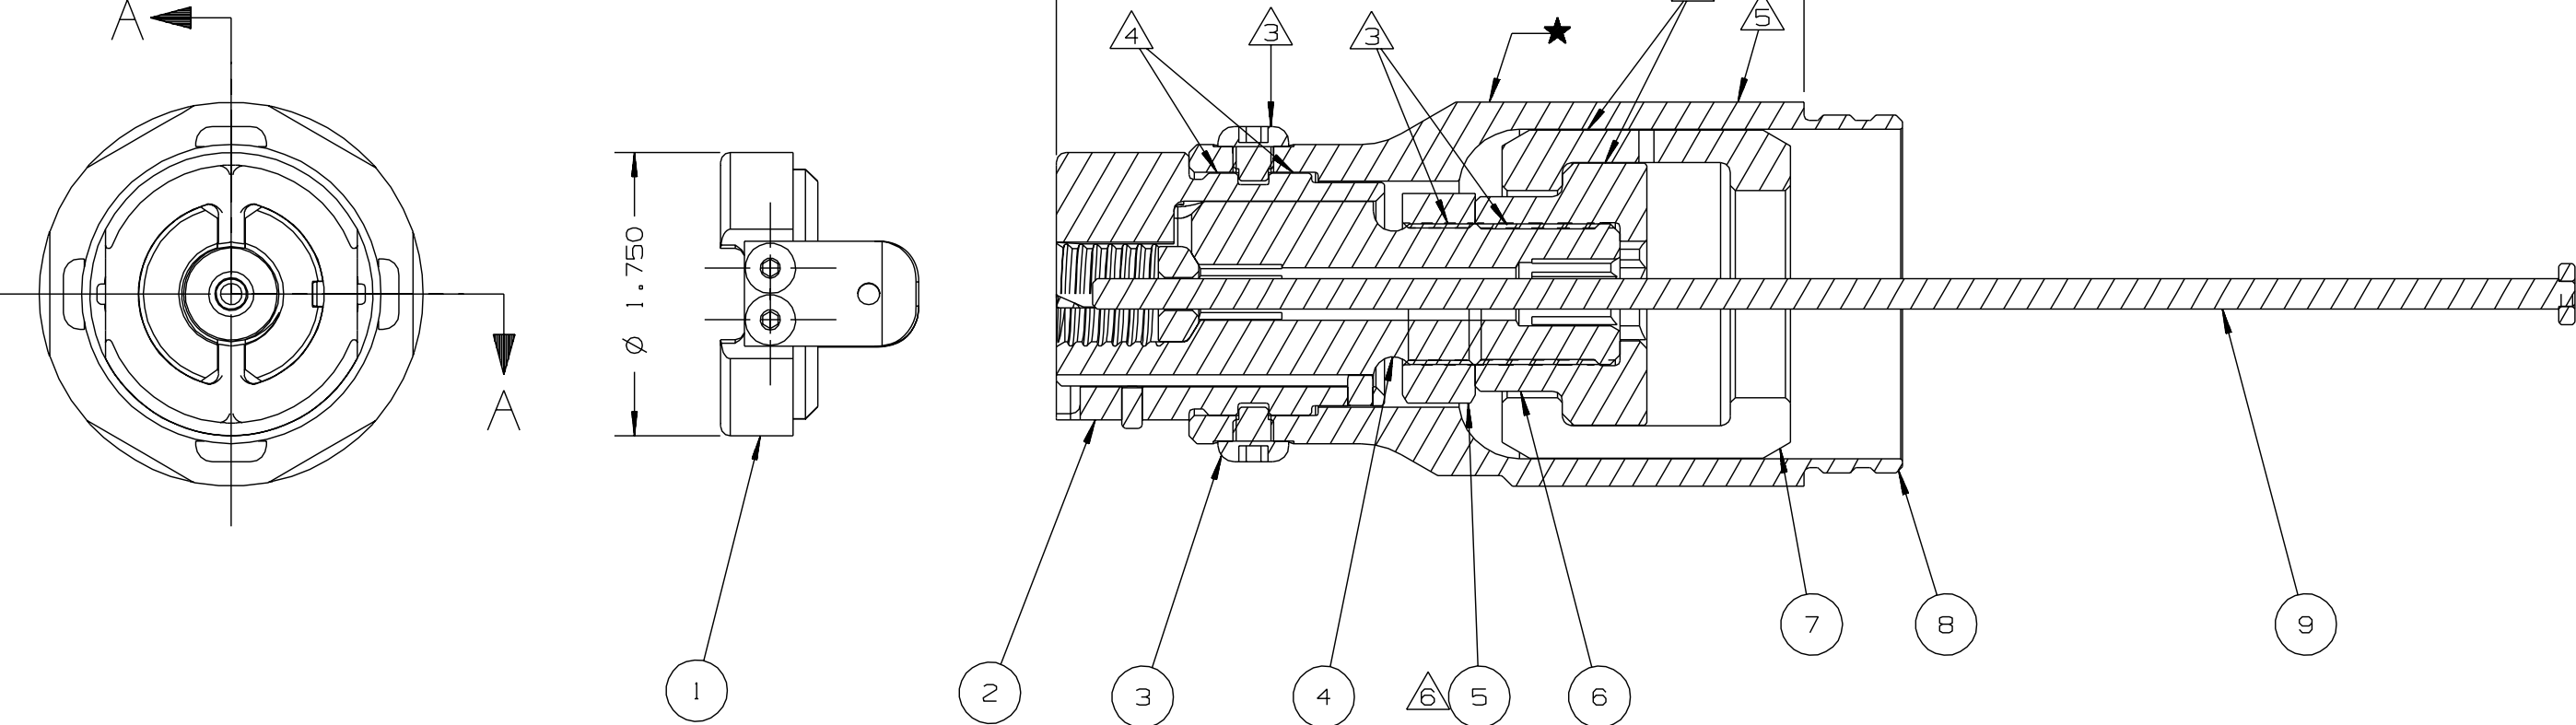

SECTION A - A

128899	1	LIMIT SWITCH ROD ASSY	9
128879	1	ANVIL HOLDER	8
127570	1	SPLIT RINGS	7
127573	1	THIMBLE NUT	6
127774	1	JAM NUT	5
128897	1	THIMBLE	4
128882	4	SCREW, MODIFIED	3
128454	1	ANVIL ASSY, COLLAR CUTTER	2
128455	1	ANVIL ASSY, CUTTER EXTENSION	1
PART NO.	QTY	DESCRIPTION	ITEM

HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DR., P.O. BOX 2270 KINGSTON, NEW YORK 12401			
CUTTER NOSE ASSEMBLY, HSSFT-M16 TOOL MHS-16 (16MM) & HS-20(5/8")			
DET: TRK	CK:	DATE: 6/24/08	SCALE: FULL
FOC. FAC.	B	99-7602CC	