


REV	DESCRIPTION	DET	DATE
B	130182-5 WAS 127577-5, UPDATE FORMAT	EL	08/15/12

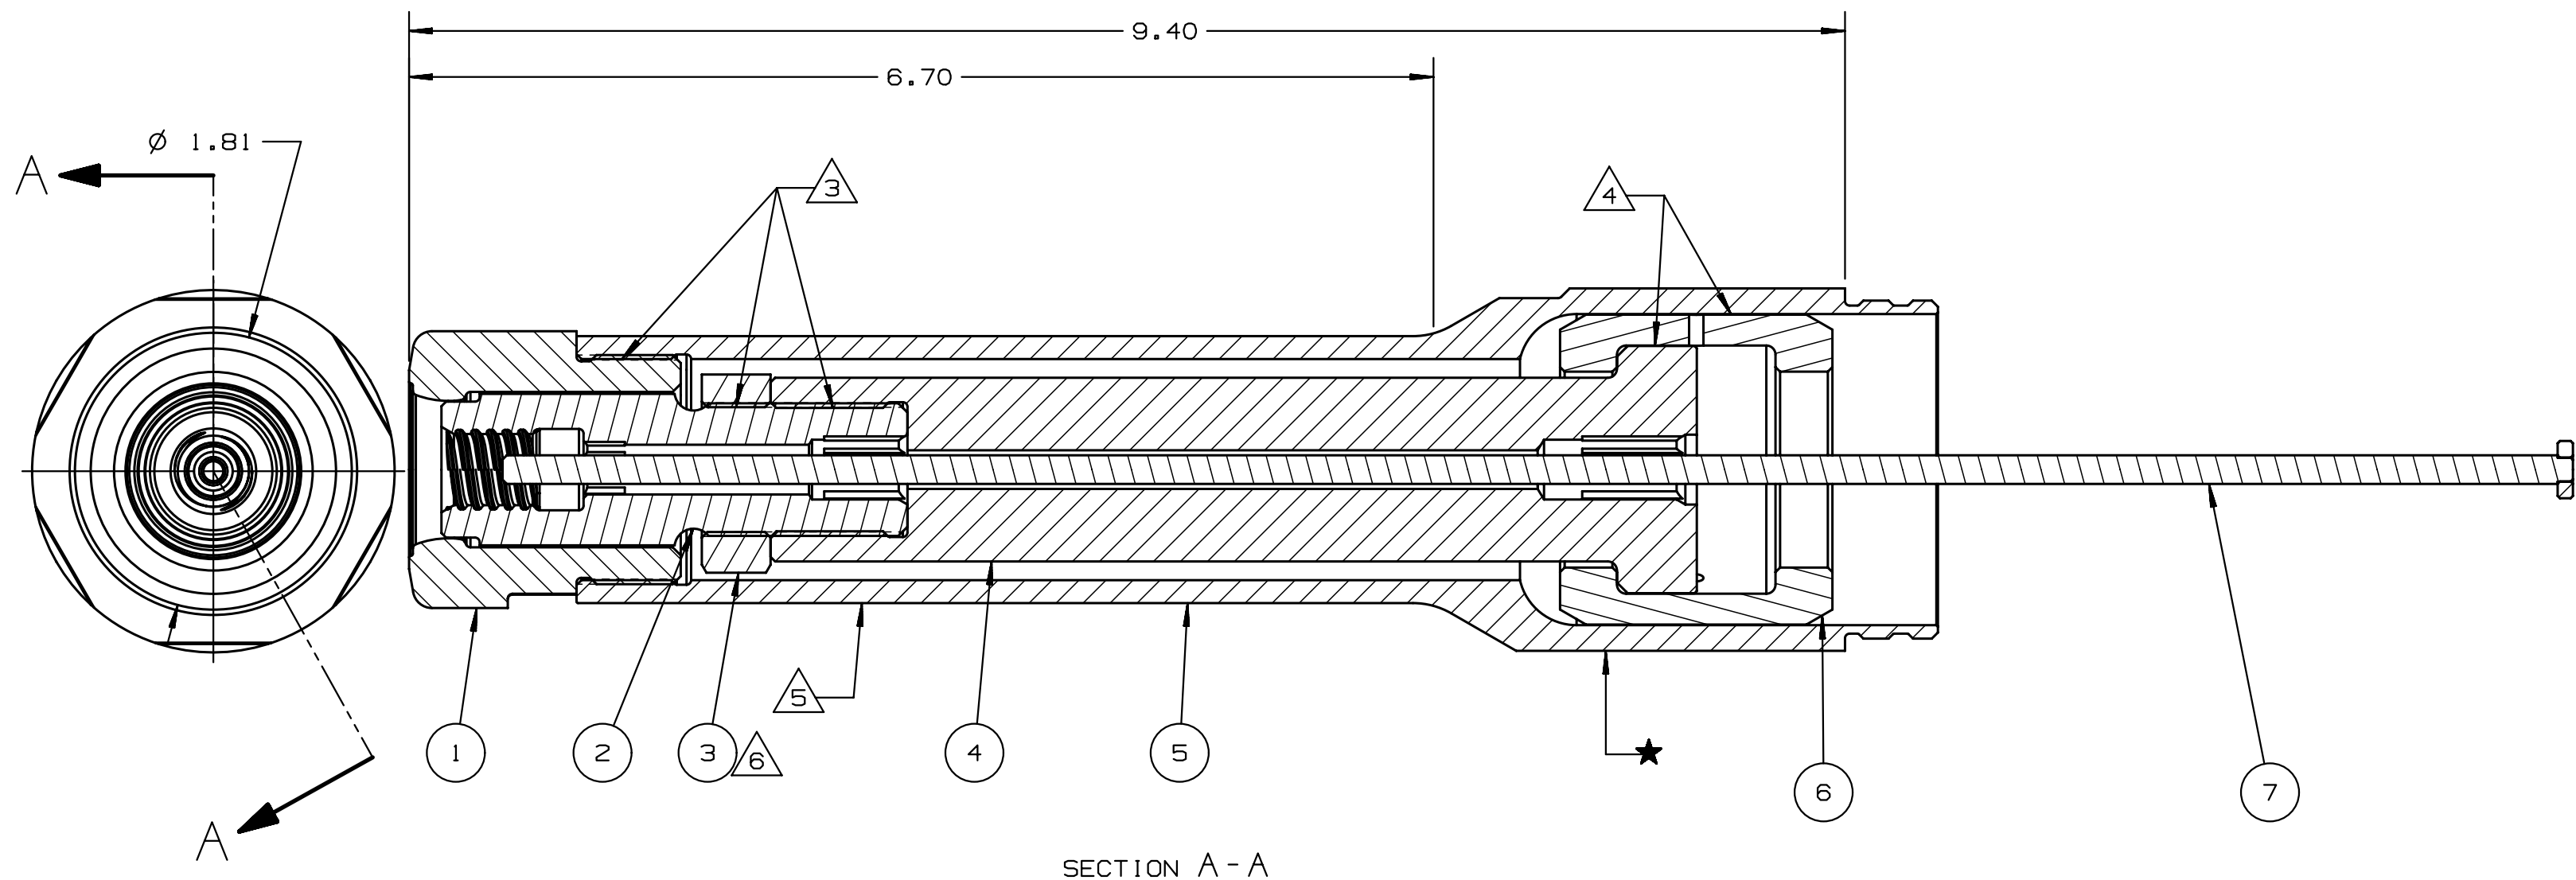

SECTION A - A

NOTES:

- 1 ETCH PER HUCK SPEC 42-311 ★
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- 5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6 TORQUE TO 90-100 LBS-FT.

①	130182-5	1	ASSY, LIMIT SWITCH ROD	7
	127570	1	SPLIT RINGS	6
	127574-5	1	ANVIL HOLDER	5
	127573-5	1	THIMBLE NUT	4
	127774	1	JAM NUT	3
	128738	1	THIMBLE	2
	128737	1	ANVIL	1
	PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY, HSSFT-M16 TOOL MHS2-16 (16MM) & HS2-20 (5/8")	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190		ENG: TRK CK:	DATE: 12/21/07 SCALE: 1:1
		B	99-7662-5