


REV	DESCRIPTION	DET	DATE
B	ADD ITEM 7, 130182, UPDATE FORMAT	EL	08/15/12

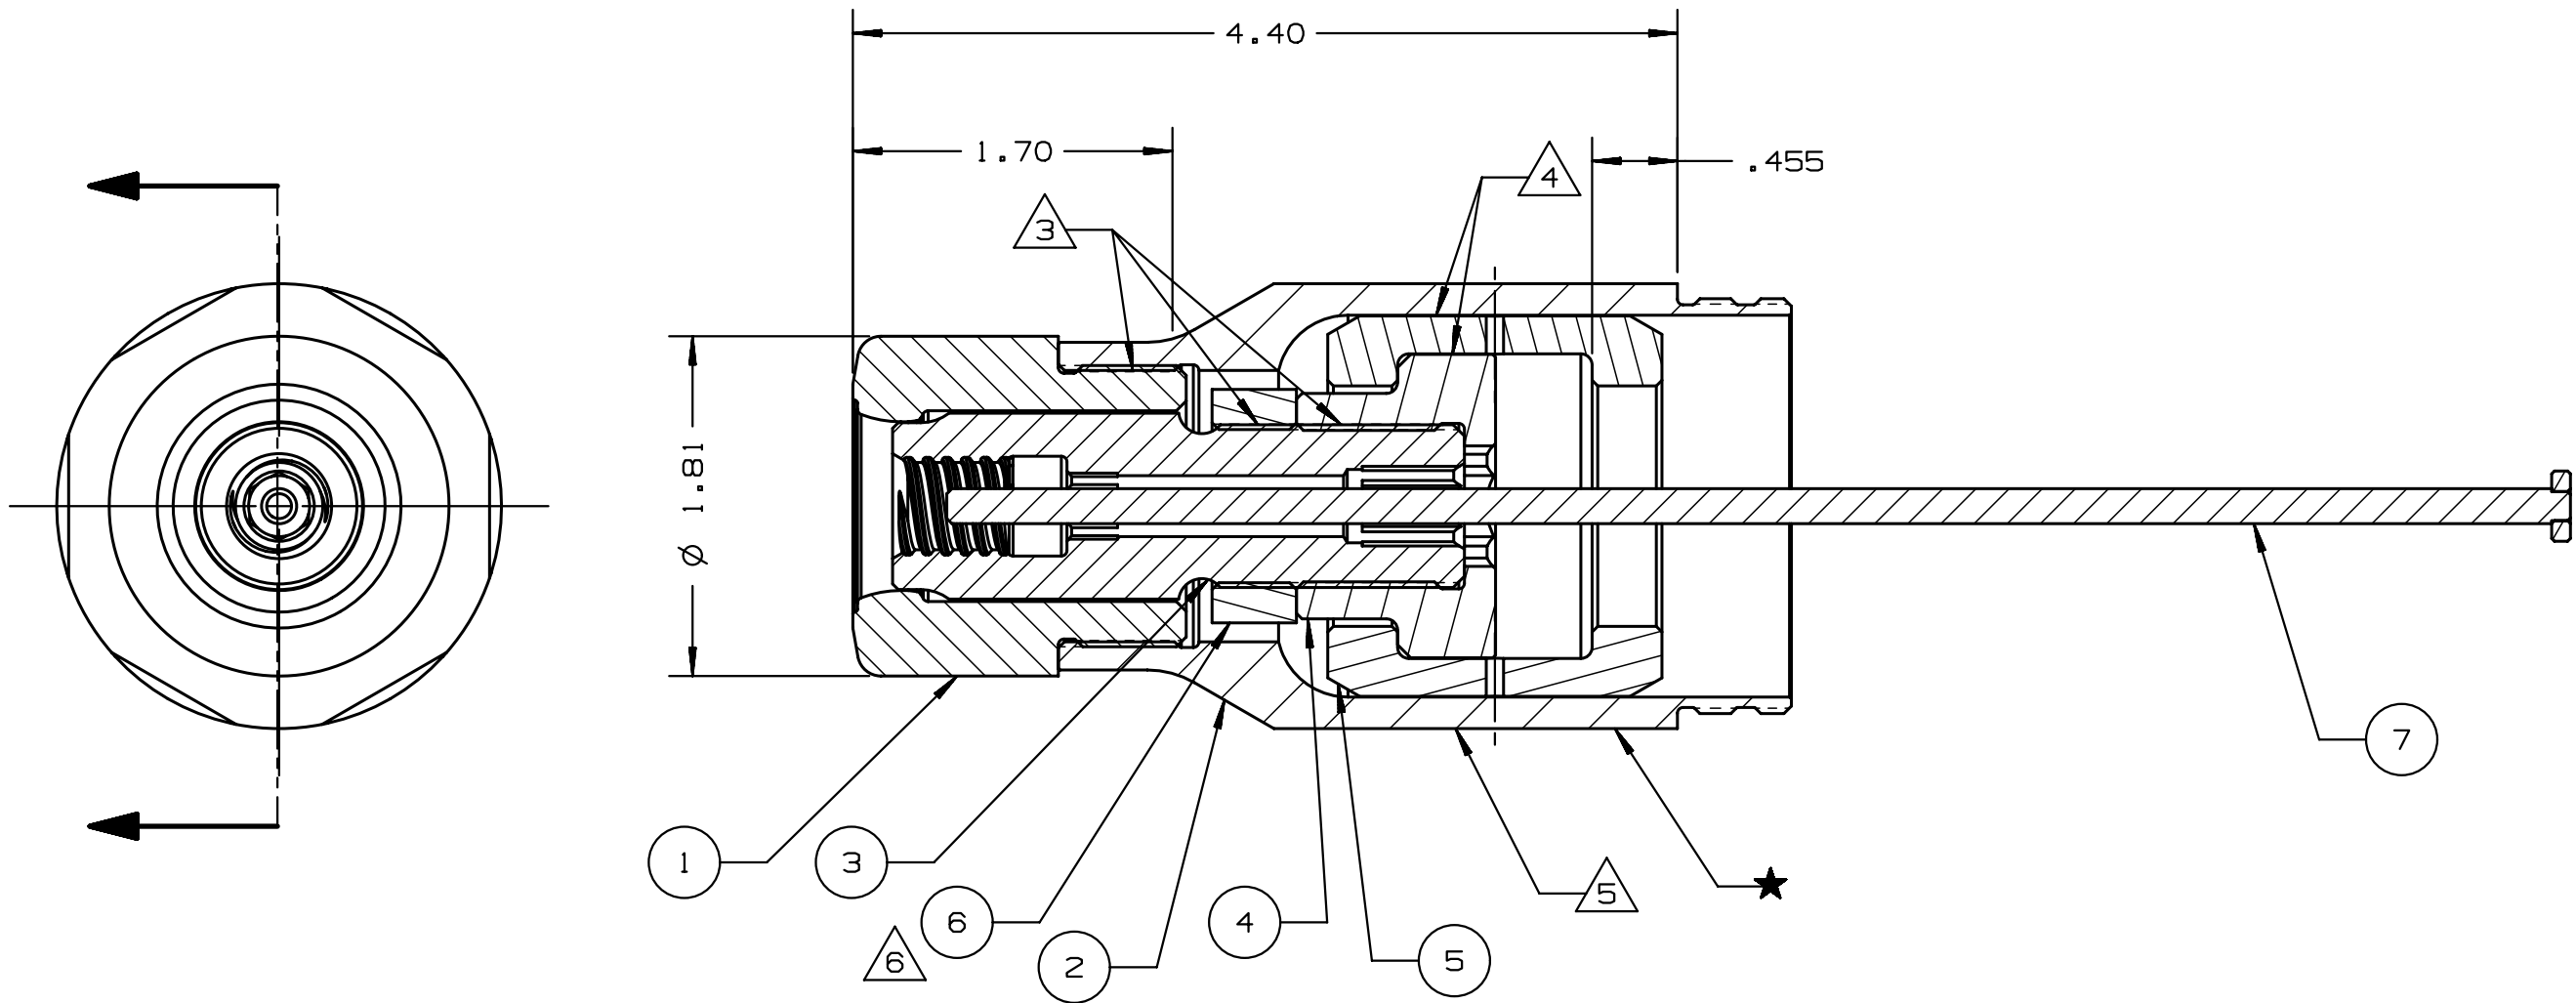

NOTES:

- 1 ETCH PER HUCK SPEC 42-311 ★
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- △3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- △4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- △5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- △6 TORQUE TO 90-100 LBS-FT.

⑧ 130182	1	ASSY, LIMIT SWITCH ROD	7
127774	1	JAM NUT	6
127570	1	SPLIT RINGS	5
127573	1	THIMBLE NUT	4
128738	1	THIMBLE	3
127574	1	ANVIL HOLDER	2
128737	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY, HSSFT-M16 TOOL MHS2-16 (16MM) & HS2-20 (5/8")	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190	ENG: B	TRK: CK:	DATE: 12/7/07 SCALE: 1:1
		99-7662	