


NOTES:

- 1
- ETCH PER HUCK SPEC 42-311
- 2
- USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3
- APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4
- APPLY ANTI-SEIZE LUBRICANT P/N 508183 TO SPLIT RINGS AND ANVIL.
- 5
- APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6
- TORQUE TO 90-100 LBS-FT.
- 7
- THIS NOSE FOR LIGHT DUTY USE ONLY

REV	DESCRIPTION	DATE
A	RELEASE	5/30/08

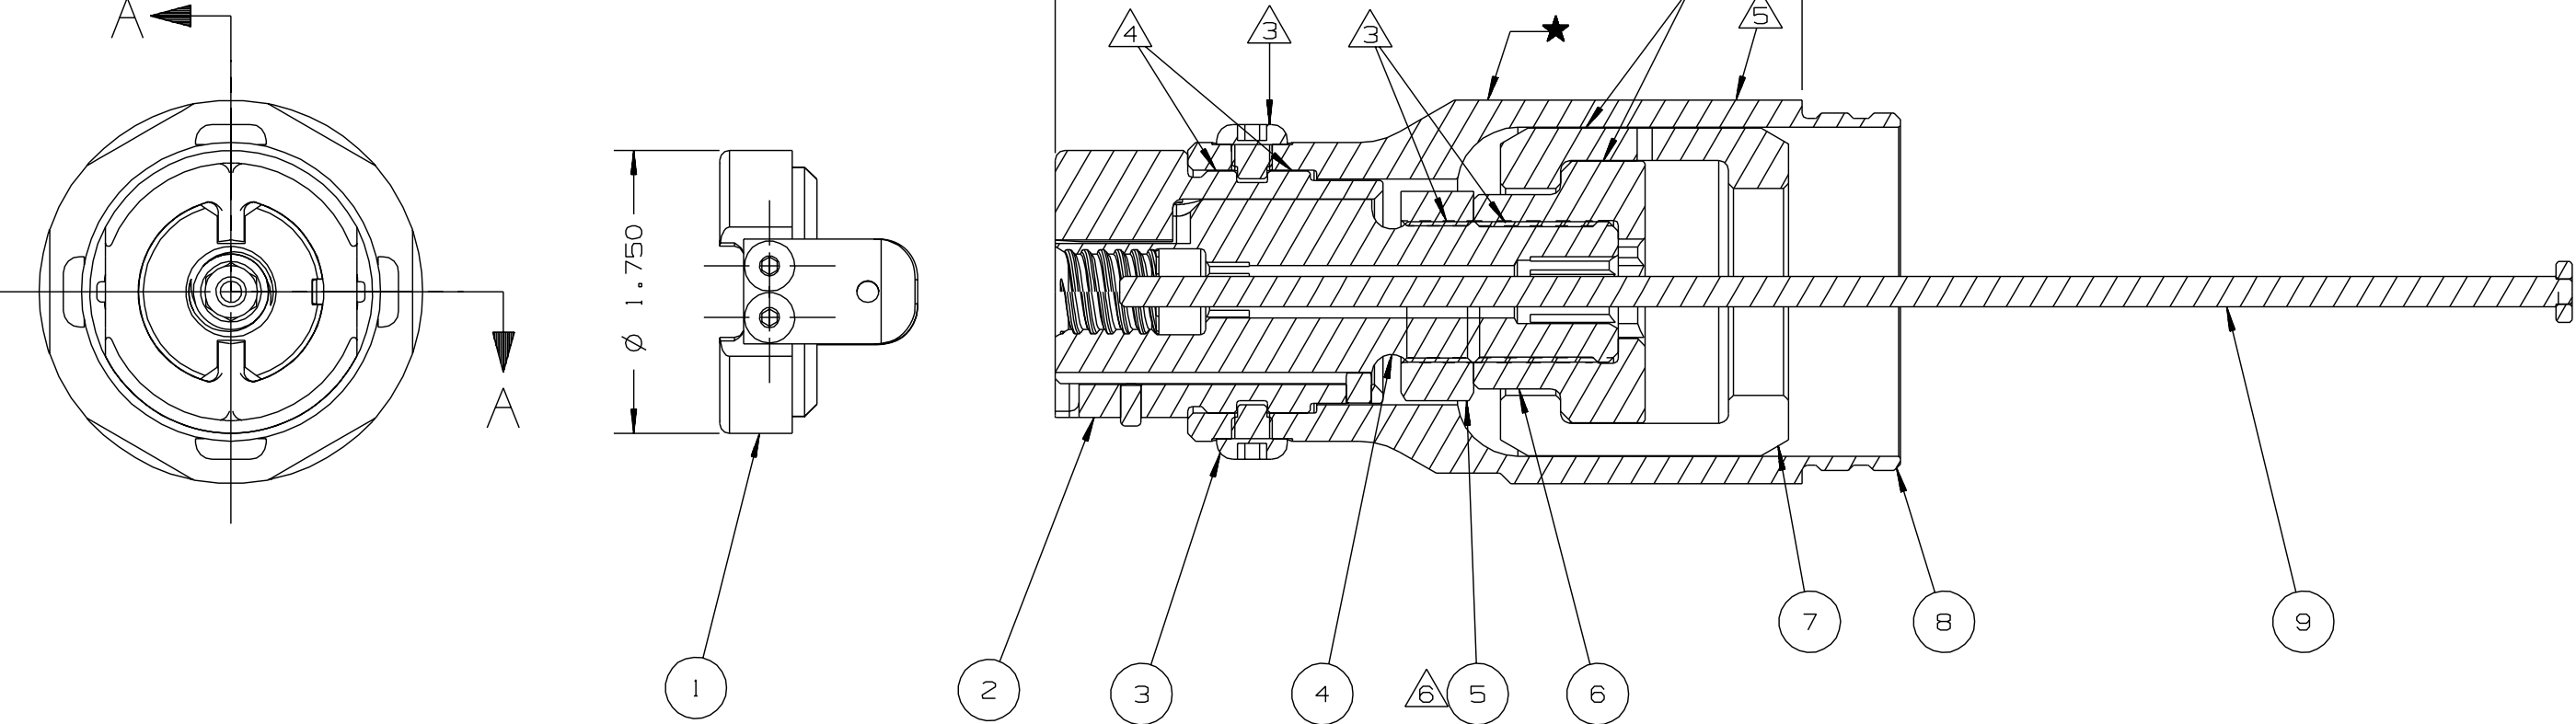

SECTION A - A

128881	1	LIMIT SWITCH ROD ASSY	9
128879	1	ANVIL HOLDER	8
127570	1	SPLIT RINGS	7
127573	1	THIMBLE NUT	6
127774	1	JAM NUT	5
128880	1	THIMBLE	4
128882	4	SCREW, MODIFIED	3
128454	1	ANVIL ASSY, COLLAR CUTTER	2
128455	1	ANVIL ASSY, CUTTER EXTENSION	1
PART NO.	QTY	DESCRIPTION	ITEM

HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DR., P.O. BOX 2270 KINGSTON, NEW YORK 12401			
CUTTER NOSE ASSEMBLY, HSSFT-M16 TOOL MHS2-16 (16MM) & HS2-20(5/8")			
DET: TRK	CK:	DATE: 5/30/08	SCALE: FULL
FOC. FAC.	B	99-7662CC	