


REV	DESCRIPTION	DET	DATE
D	UPDATE FORMAT, REMOVE NOTE 1, UPDATED LN BOM TO INCLUDE 127570	EL	09/22/17

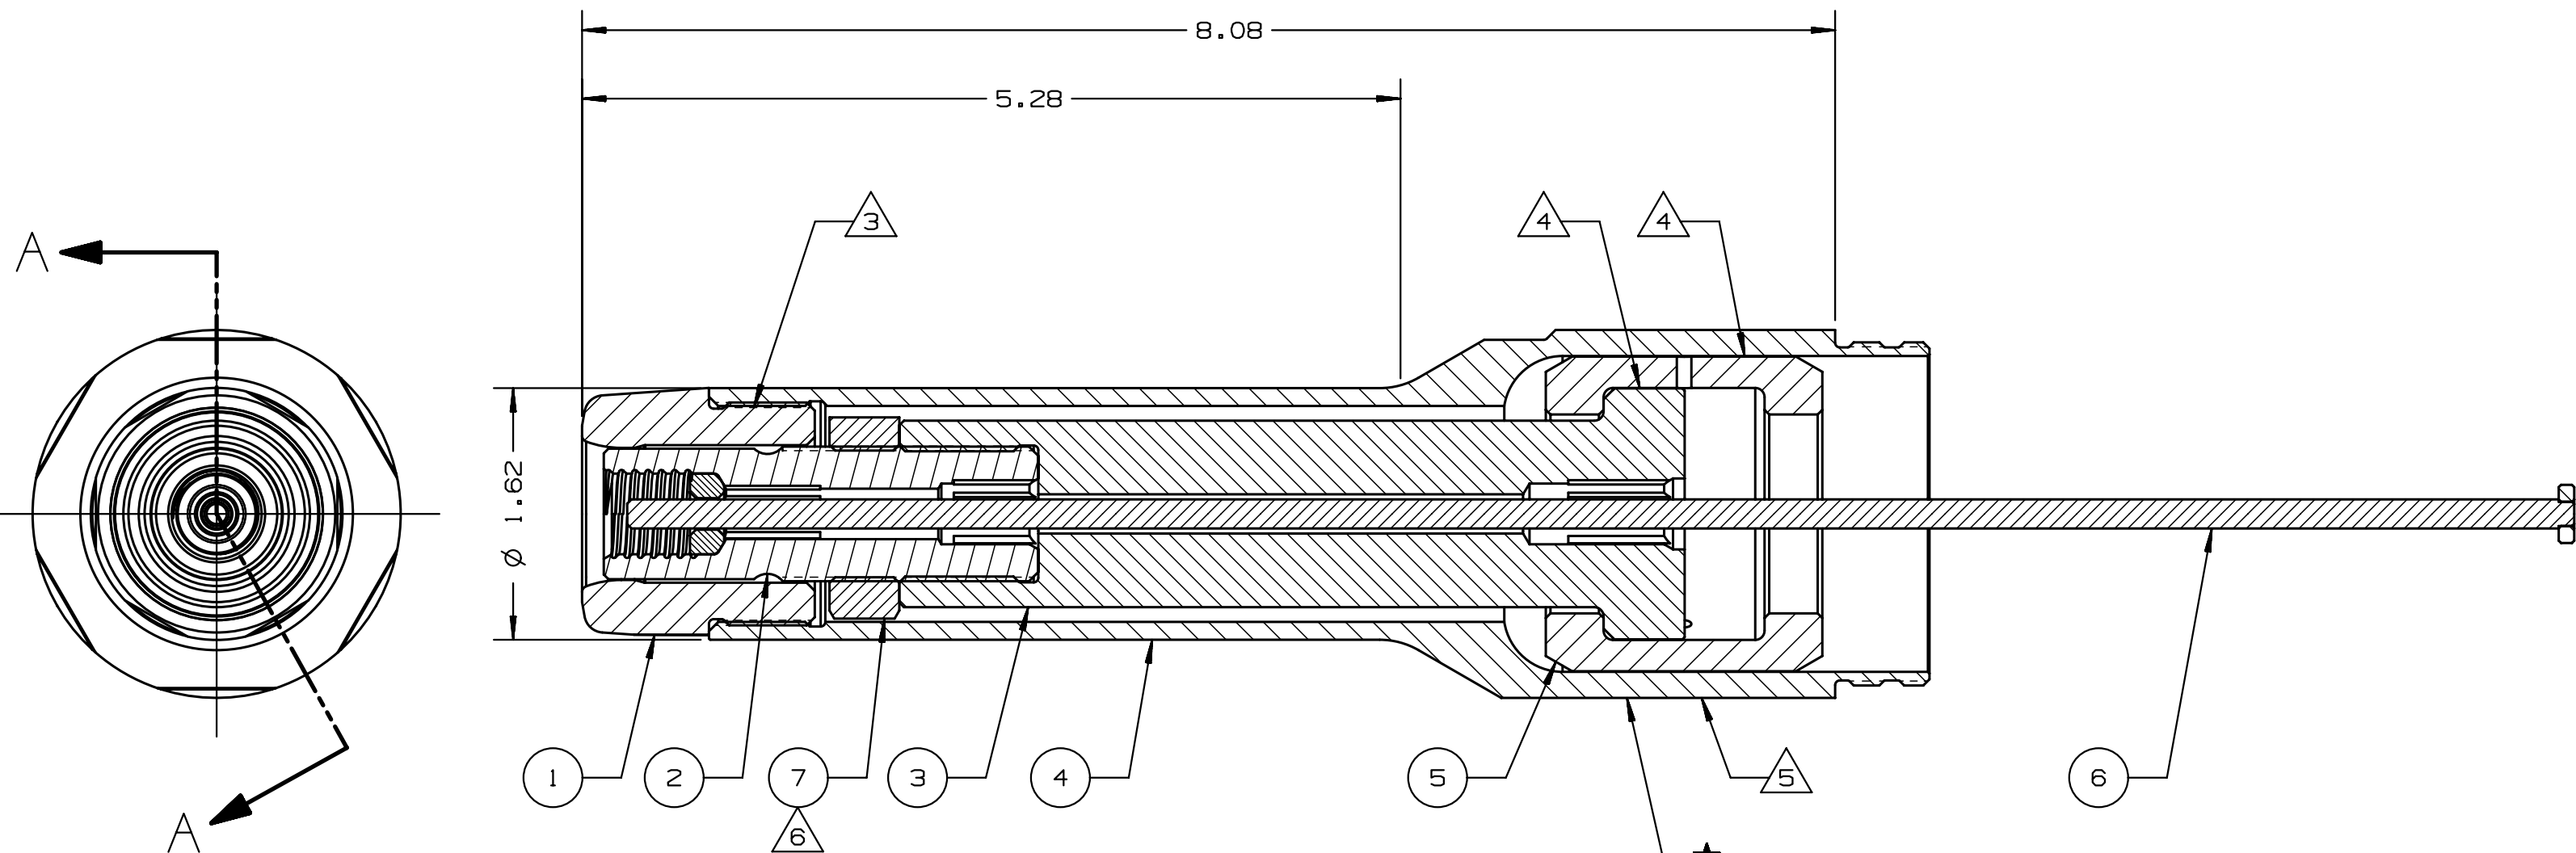

SECTION A - A

NOTES:

- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- 5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6 TORQUE TO 90-100 LBS-FT.

127774	1	NUT, JAM, SPECIAL, 7/8-14	7
127577-4	1	SWITCH, LIMIT, ASM, HSTS F21	6
127570	1	RING, SPLIT, HSSFT-M16	5
127679-4	1	HOLDER, ANVIL	4
127573-4	1	NUT, THIMBLE, HSSFT-M17	3
127772	1	THIMBLE, ASM, 14MM	2
126155	1	ANVIL, MHS-14	1
PART NO.	QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ ETCH		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY MHS-14 (14mm) HSSFT-M16 TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190		ENG: TRK	CK: DATE: 1/7/04 SCALE: 1:1
		B	99-7702-4