


REV	DESCRIPTION	DATE
A	RELEASE	7/23/07

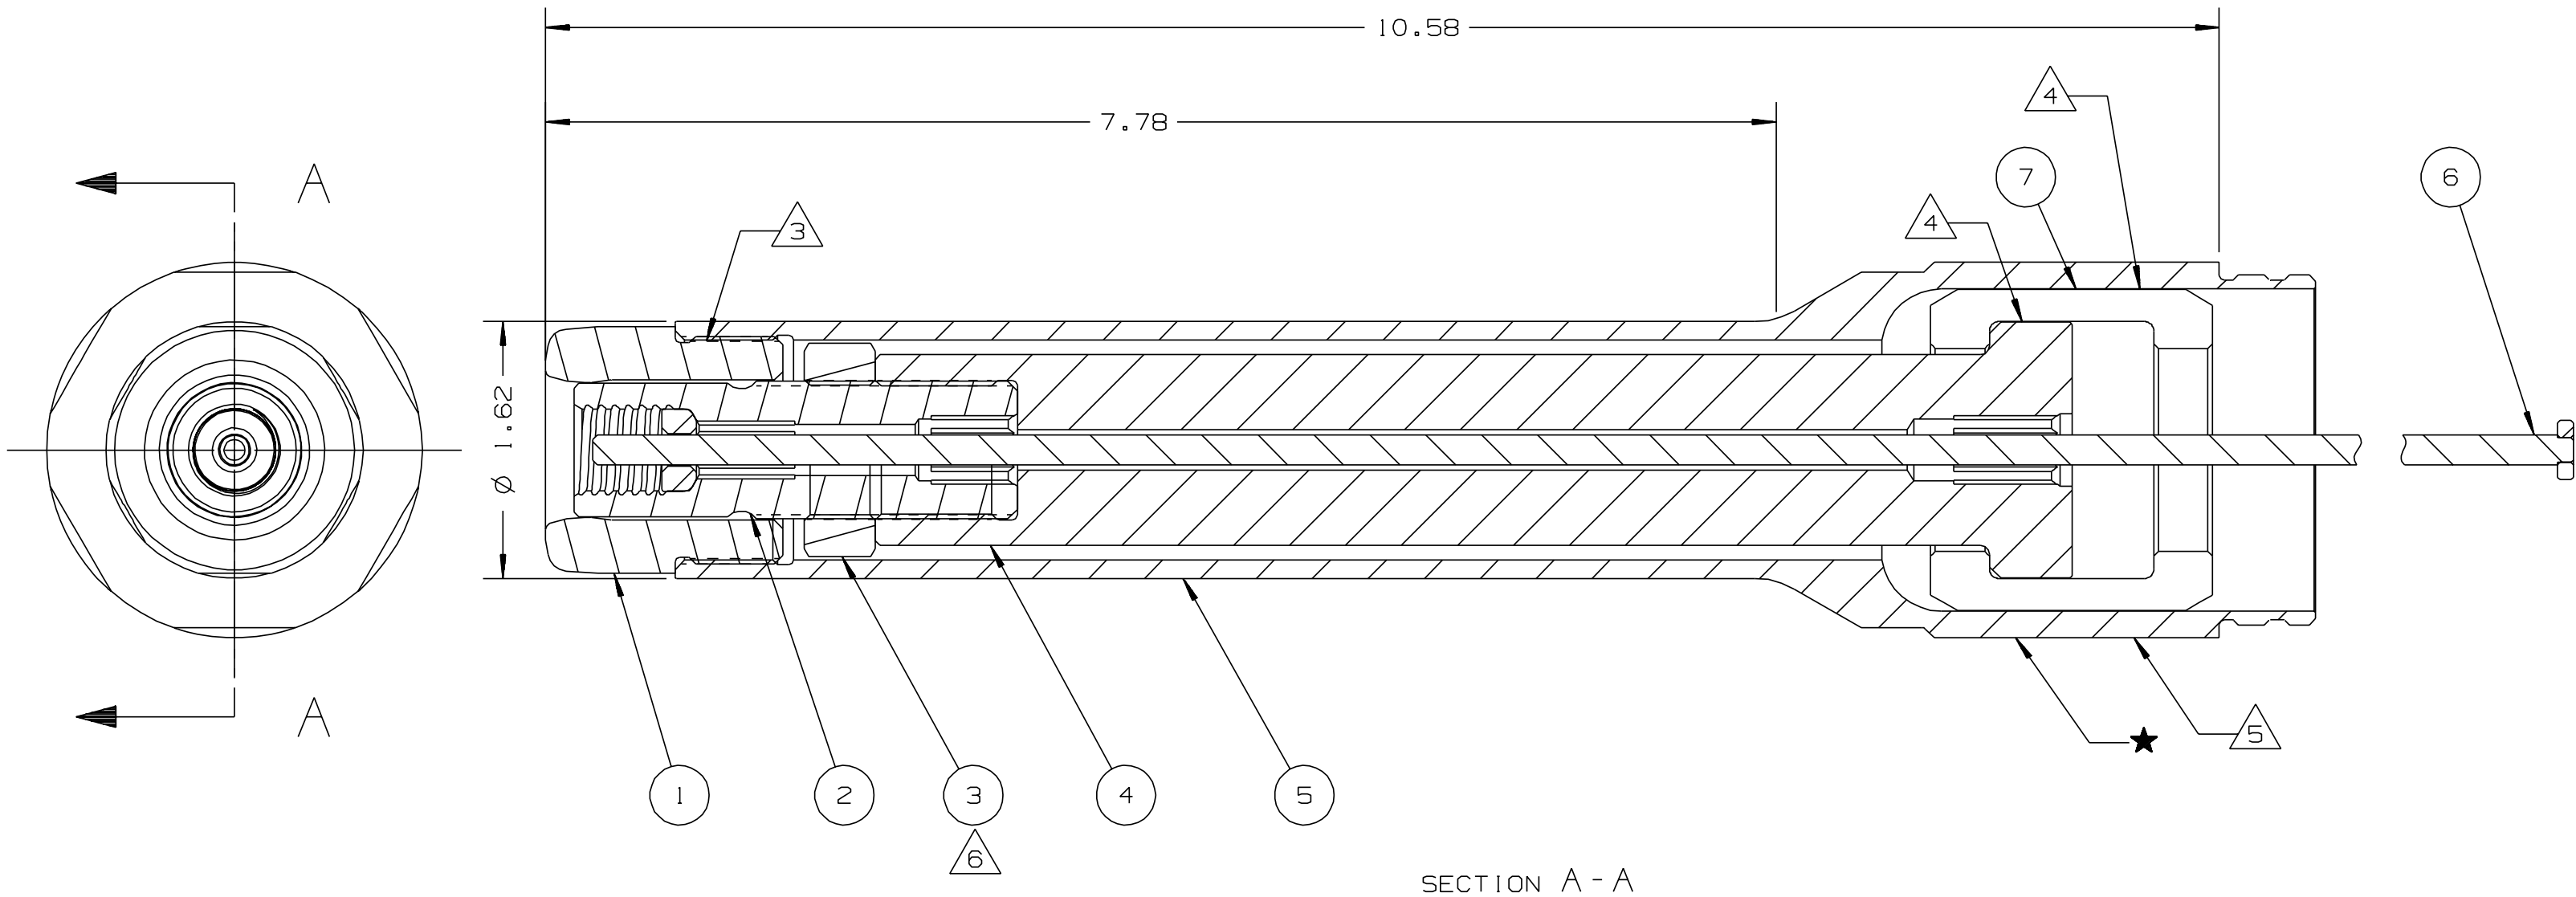

NOTES:

- 1 ETCH PER HUCK SPEC 42-311 ★
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- △3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- △4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- △5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER. DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- △6 TORQUE TO 90-100 LBS-FT.

127570	1	SPLIT RINGS	7
127577-65	1	ACTUATOR ROD ASSY	6
127679-65	1	ANVIL HOLDER	5
127573-65	1	THIMBLE NUT	4
127774	1	JAM NUT	3
127772	1	THIMBLE ASSY	2
126155	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ ETCH			
ITAR:	HUCK INTERNATIONAL, INC., I.S.D. 1 CORPORATE DR., P.O. BOX 2270 KINGSTON, NEW YORK 12401		
ECCN: EAR99	NOSE ASSEMBLY MHS-14 (14mm) HSSFT-M16 TOOL		
SCH B#: 8467.99.0190	DET: NDG	CK:	DATE: 7/23/07 SCALE: 1:1
HTS: 8467.99.0190	B	99-7702-65	