


REV	DESCRIPTION	DET	DATE
C	ITEM 6, 130185-4 WAS 127577-4, UPDATE FORMAT	EL	08/15/12

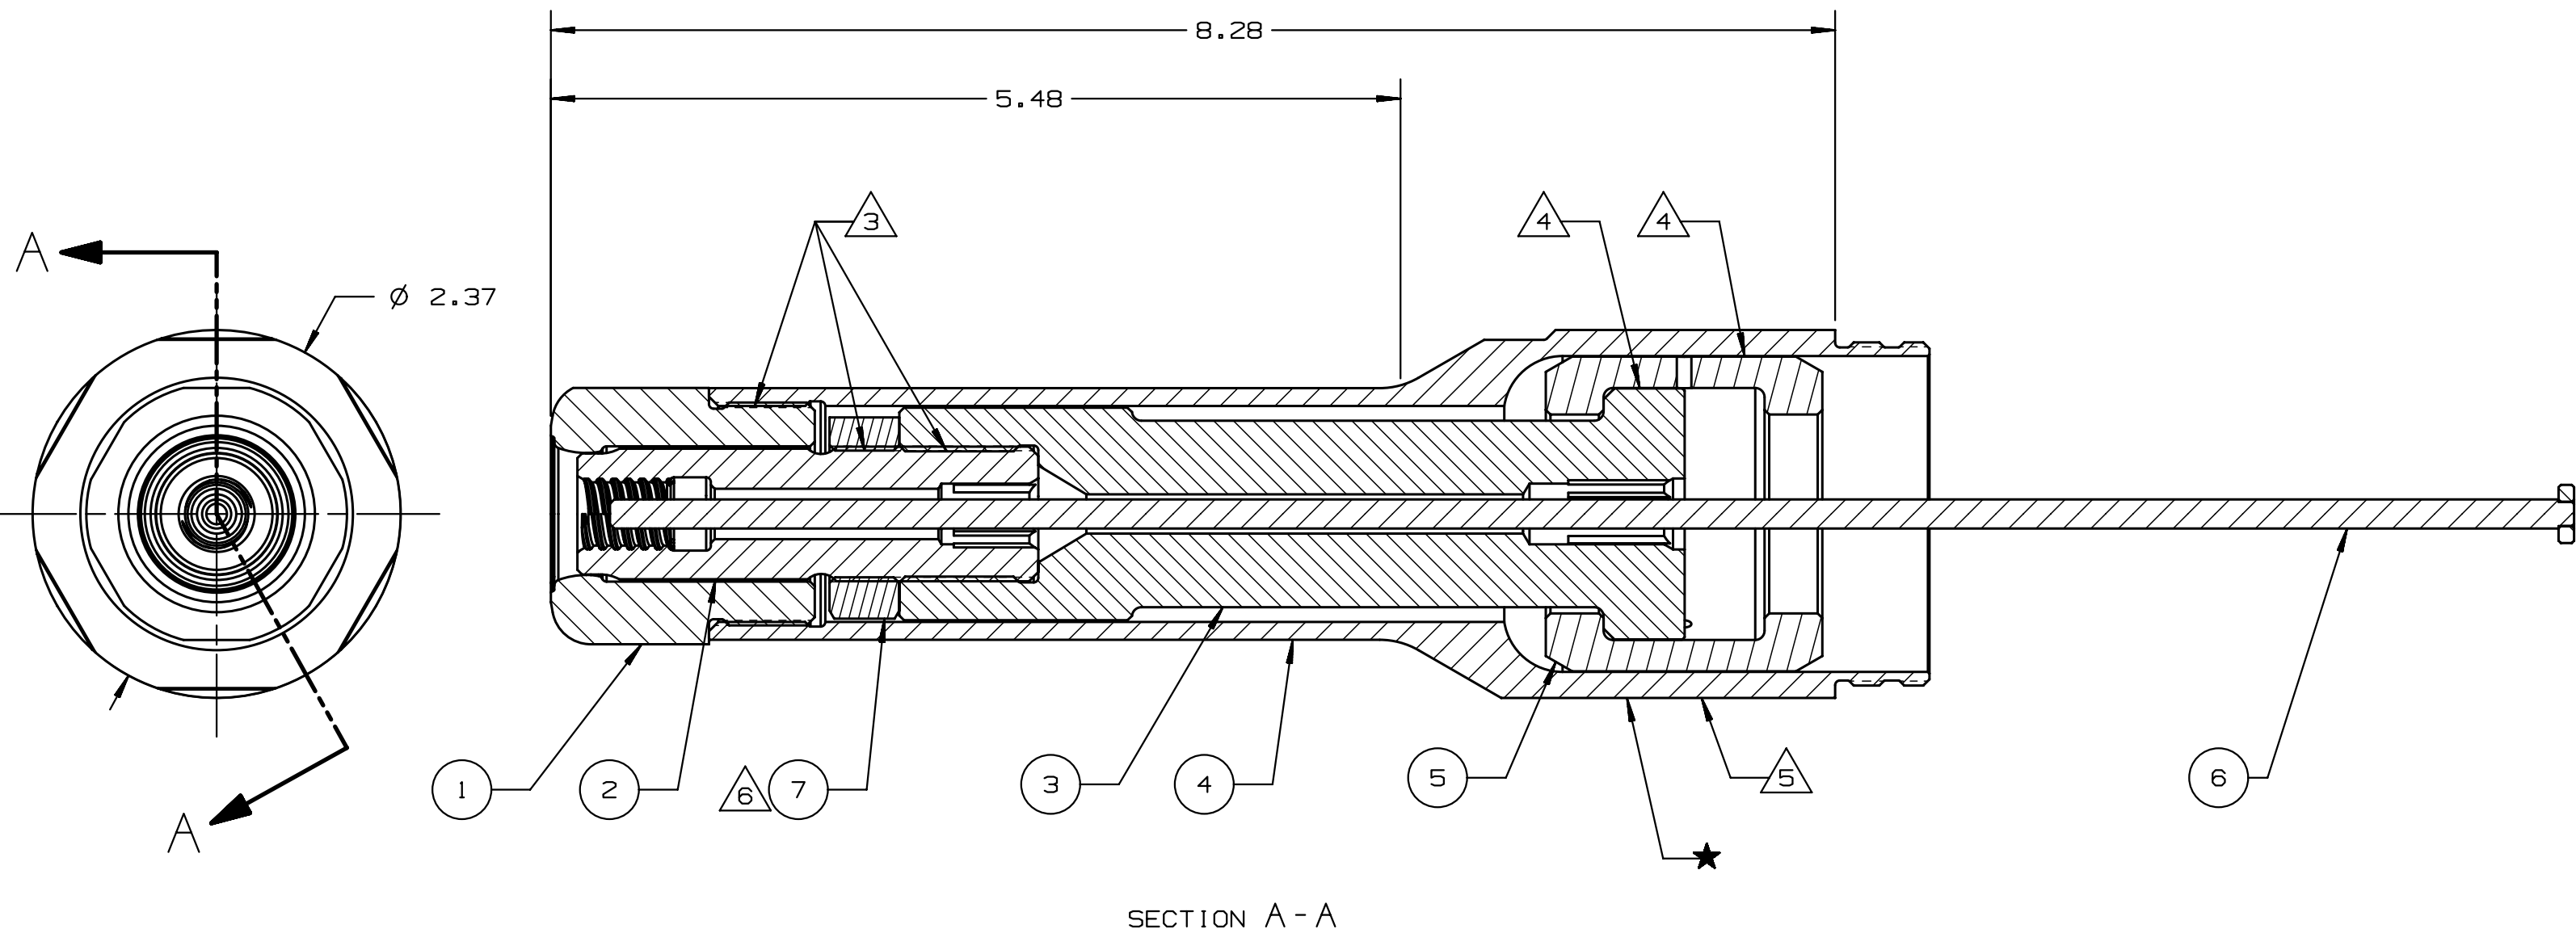

NOTES:

- 1 ETCH PER HUCK SPEC 42-311 ★
- 2 USE WITH HSSFT-M16 INSTALLATION TOOL.
- 3 APPLY LOCTITE 242 P/N 505016 TO THESE THREADED JOINTS.
- 4 APPLY LUBRIPLATE P/N 502723 TO SPLIT RINGS.
- 5 APPLY WARNING STICKER P/N 590273 TO ANVIL HOLDER.
DO NOT PERMIT STICKER TO OVERLAP ONTO ANVIL.
- 6 TORQUE TO 90-100 LBS-FT.

127774	1	JAM NUT	7
130182-4	1	ASSY, LIMIT SWITCH ROD	6
127570	1	SPLIT RINGS	5
127679-4	1	ANVIL HOLDER	4
127573-4	1	THIMBLE NUT	3
128684	1	THIMBLE ASSY	2
128683	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY MHS2-14 HSSFT-M16	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190	B	99-7762-4	