


REV	DESCRIPTION	DET	DATE
A	RELEASE	MJK	02/20/13
B	ADDED/UPDATED REFERENCE DIMS, ADDED NOTES, DWG SIZE B WAS A	SMA	01/13/15
C	131072 PULLER WAS 128929	SMA	12/14/17

NOTES:

- 1 TO ASSEMBLE:
A) PLACE SPACER-130205 INTO TOOL'S END CAP.
B) APPLY LOCTITE 243-508567 TO THREAD OF PULLER-128929 AND THREAD INTO TOOL'S END CAP.
C) APPLY LOCTITE 243-508567 TO THREAD OF ANVIL-128759 AND THREAD INTO ADAPTER-130206.
D) APPLY ANTI-SEIZE LUBRICANT P/N: 508183 TO OUTSIDE OF PULLER-128929.
E) APPLY LOCTITE 243-508567 TO THREAD OF ADAPTER-130206, INSTALL ANVIL & ADAPTER ASM OVER PULLER-128929 AND THREAD INTO TOOL'S PISTON.

2 APPLY WARNING STICKER P/N: 590513 TO ANVIL-128759.

3 LEFT HAND THREAD

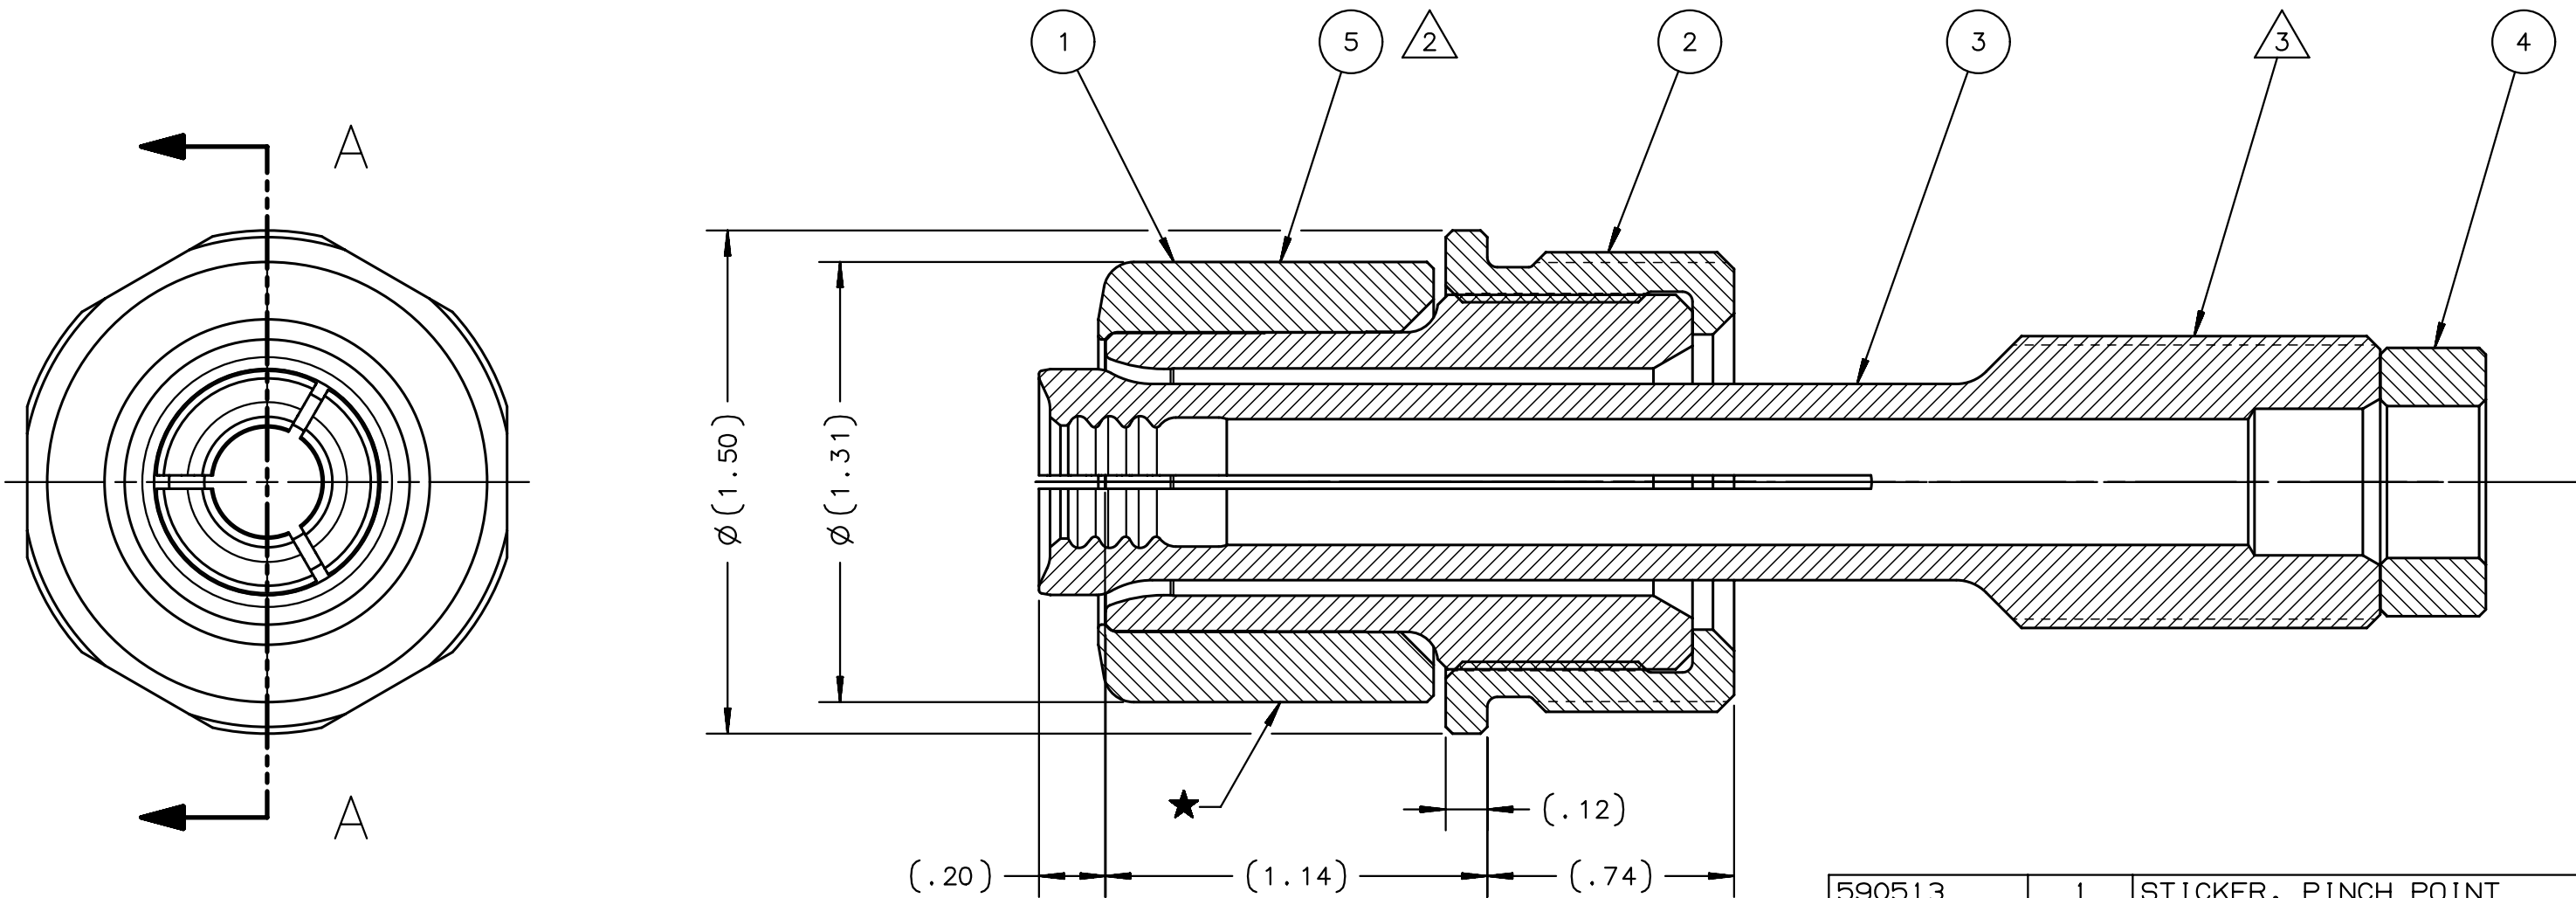

SECTION A-A

C

590513	1	STICKER, PINCH POINT	5
130205	1	SPACER, PULLER, 12MM BT	4
131072	1	PULLER, 12MM BT, SF20	3
130206	1	ADAPTER, ANVIL, 12MM BT	2
128759	1	ANVIL ASM, 12MM BT	1
PART NO.	QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE, 12MM BT SFBTT15 TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: SFBTT15	
		ENG: CHR	CK: DATE: 10/07/12 SCALE: 2:1
HTS: 8467.99.0190		B	99-7860

Inc.