


NOTES:

- 1 APPLY ANTI-SEIZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- 2 APPLY LOCTITE 243 P/N: 508567 TO THESE THREADED JOINTS PER MFR'S INSTRUCTIONS DURING ASSEMBLY ON TOOL.
- 3 APPLY WARNING STICKERS P/N: 590516 AND 590513 TO ANVIL HOLDER.

REV	DESCRIPTION	DET	DATE
A	RELEASE	SMA	02/05/15

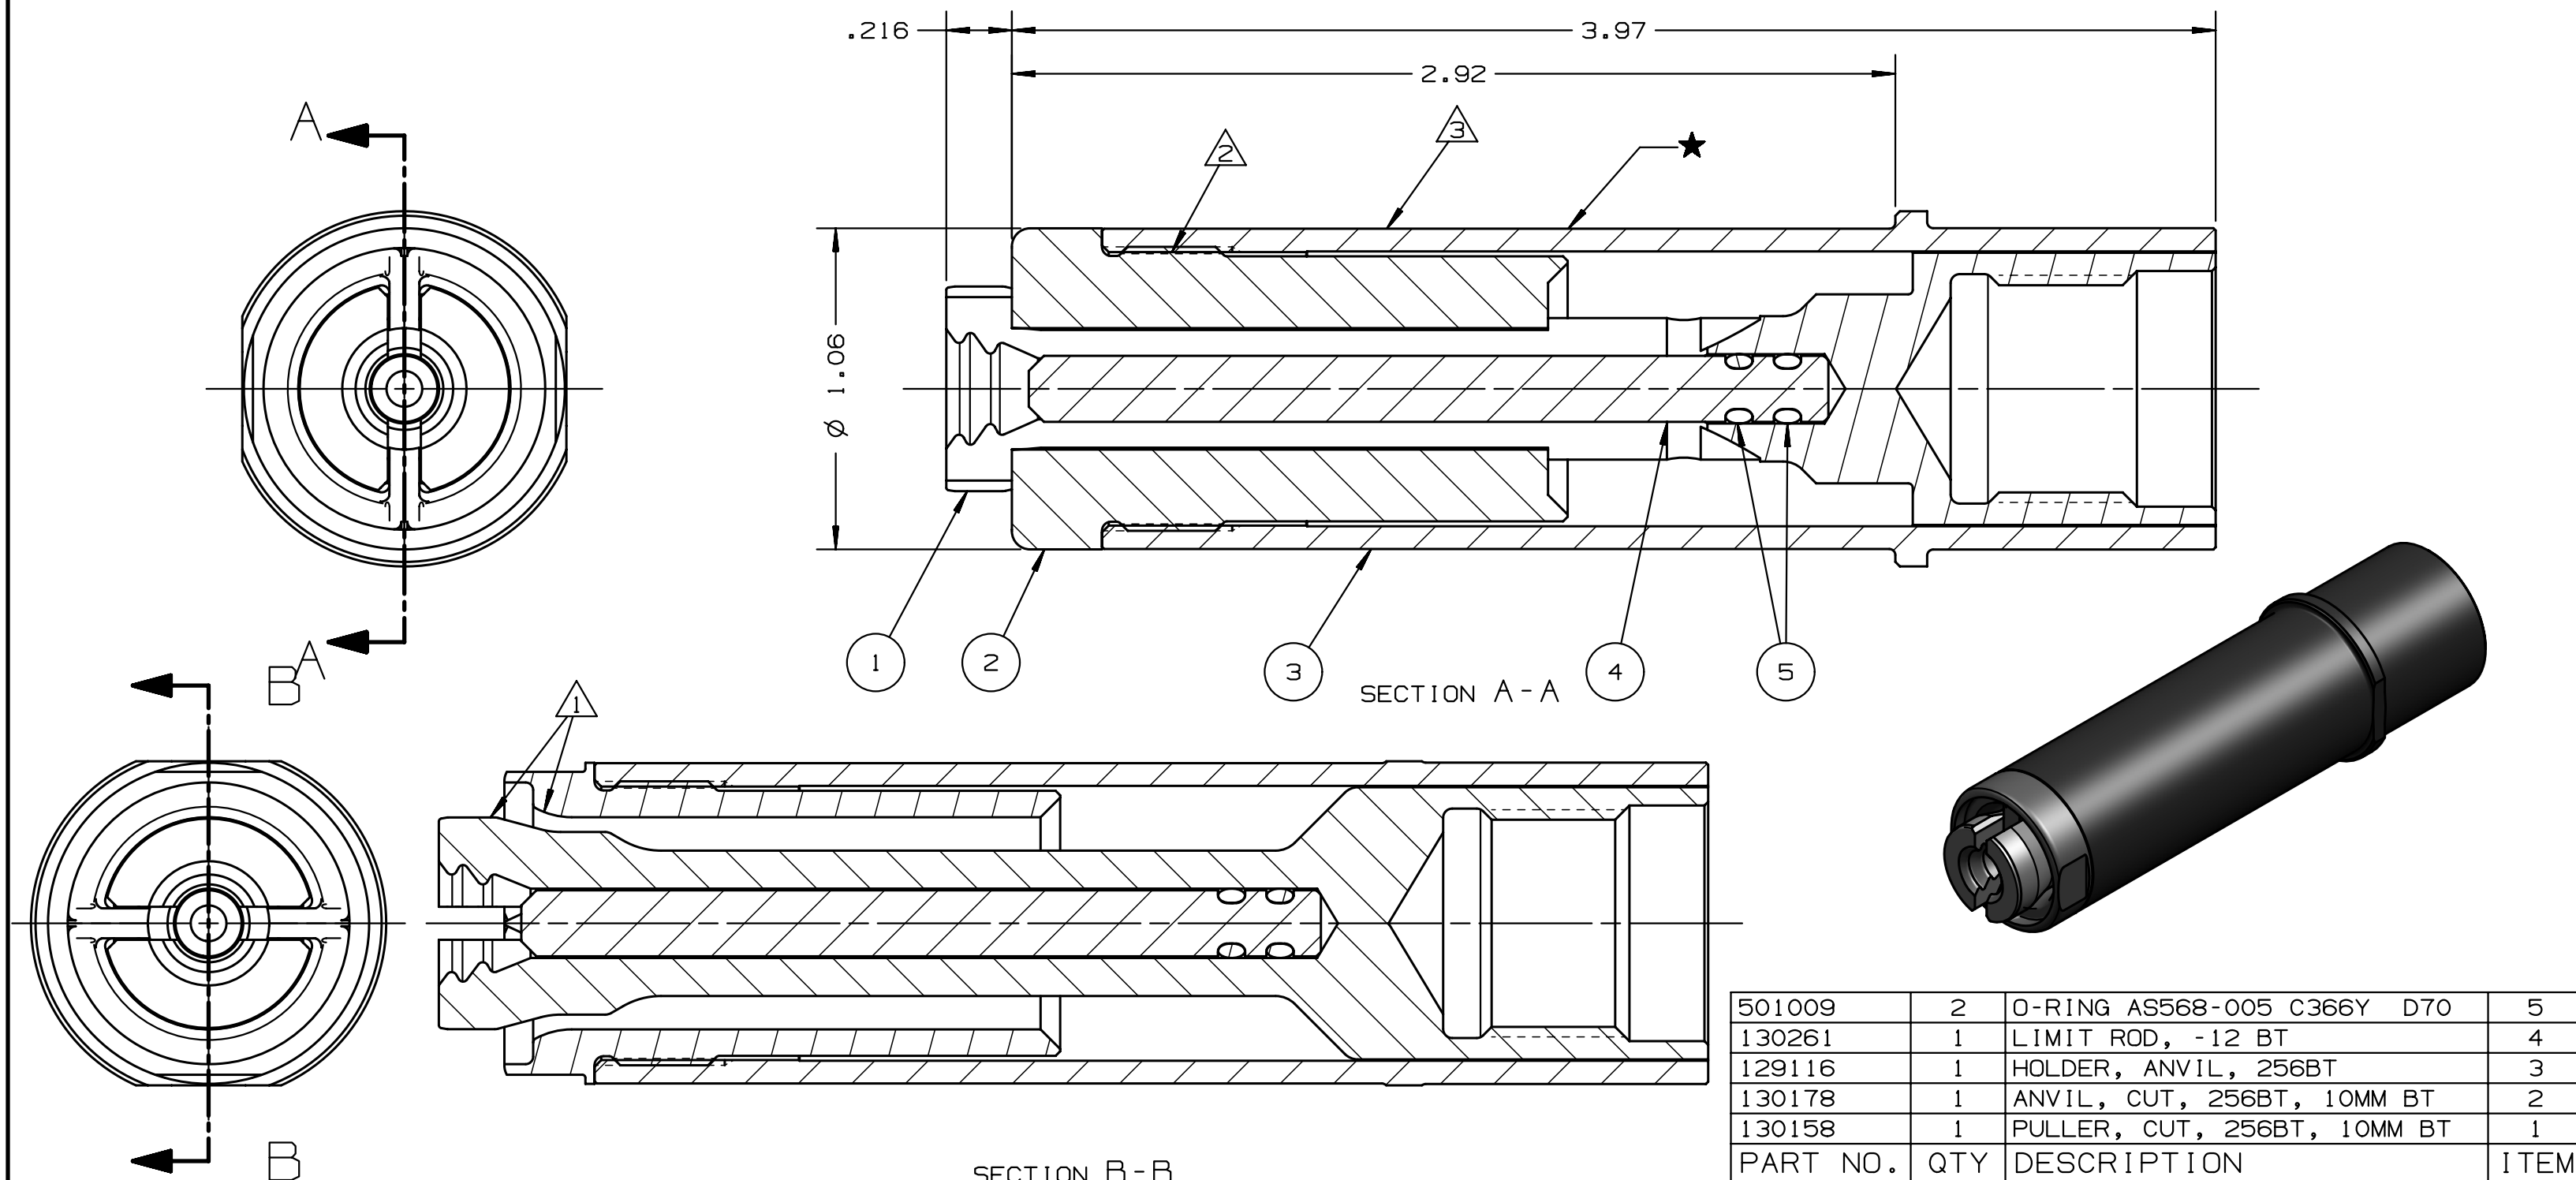

501009	2	O-RING AS568-005 C366Y D70	5
130261	1	LIMIT ROD, -12 BT	4
129116	1	HOLDER, ANVIL, 256BT	3
130178	1	ANVIL, CUT, 256BT, 10MM BT	2
130158	1	PULLER, CUT, 256BT, 10MM BT	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE, CUT, 10MM BT 256BT TOOL	
SCH B#: 8467.99.0190		FINAL ASSY:	
HTS: 8467.99.0190		ENG: SMA	CK: DATE: 02/05/11 SCALE: 2:1
		B	99-7903CC