
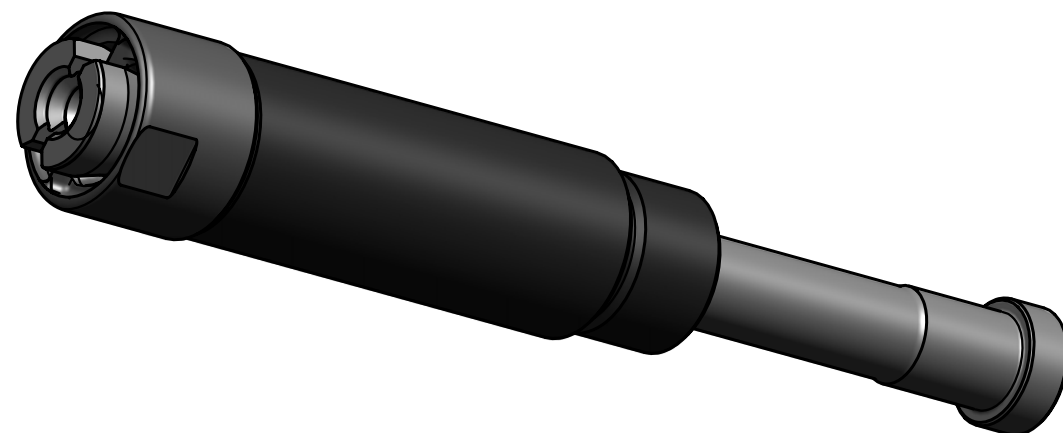


NOTES:

- 1 APPLY ANTI-SEIZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL
- 2 APPLY LOCTITE 242 P/N: 505316 TO THESE THREADED JOINTS PER MFR'S INSTRUCTIONS DURING ASSEMBLY ON TOOL
- 3 APPLY WARNING STICKER P/N: 590273 TO ANVIL HOLDER

REV	DESCRIPTION	DET	DATE
C	REINSTATED AS 99-7925CC WAS PR3307-99-7925CC	TRK	06/04/13
D	UPDATED VIEWS PER PULLER REVISION, UPDATED PART DESCRIPTIONS	HKS	2/23/16

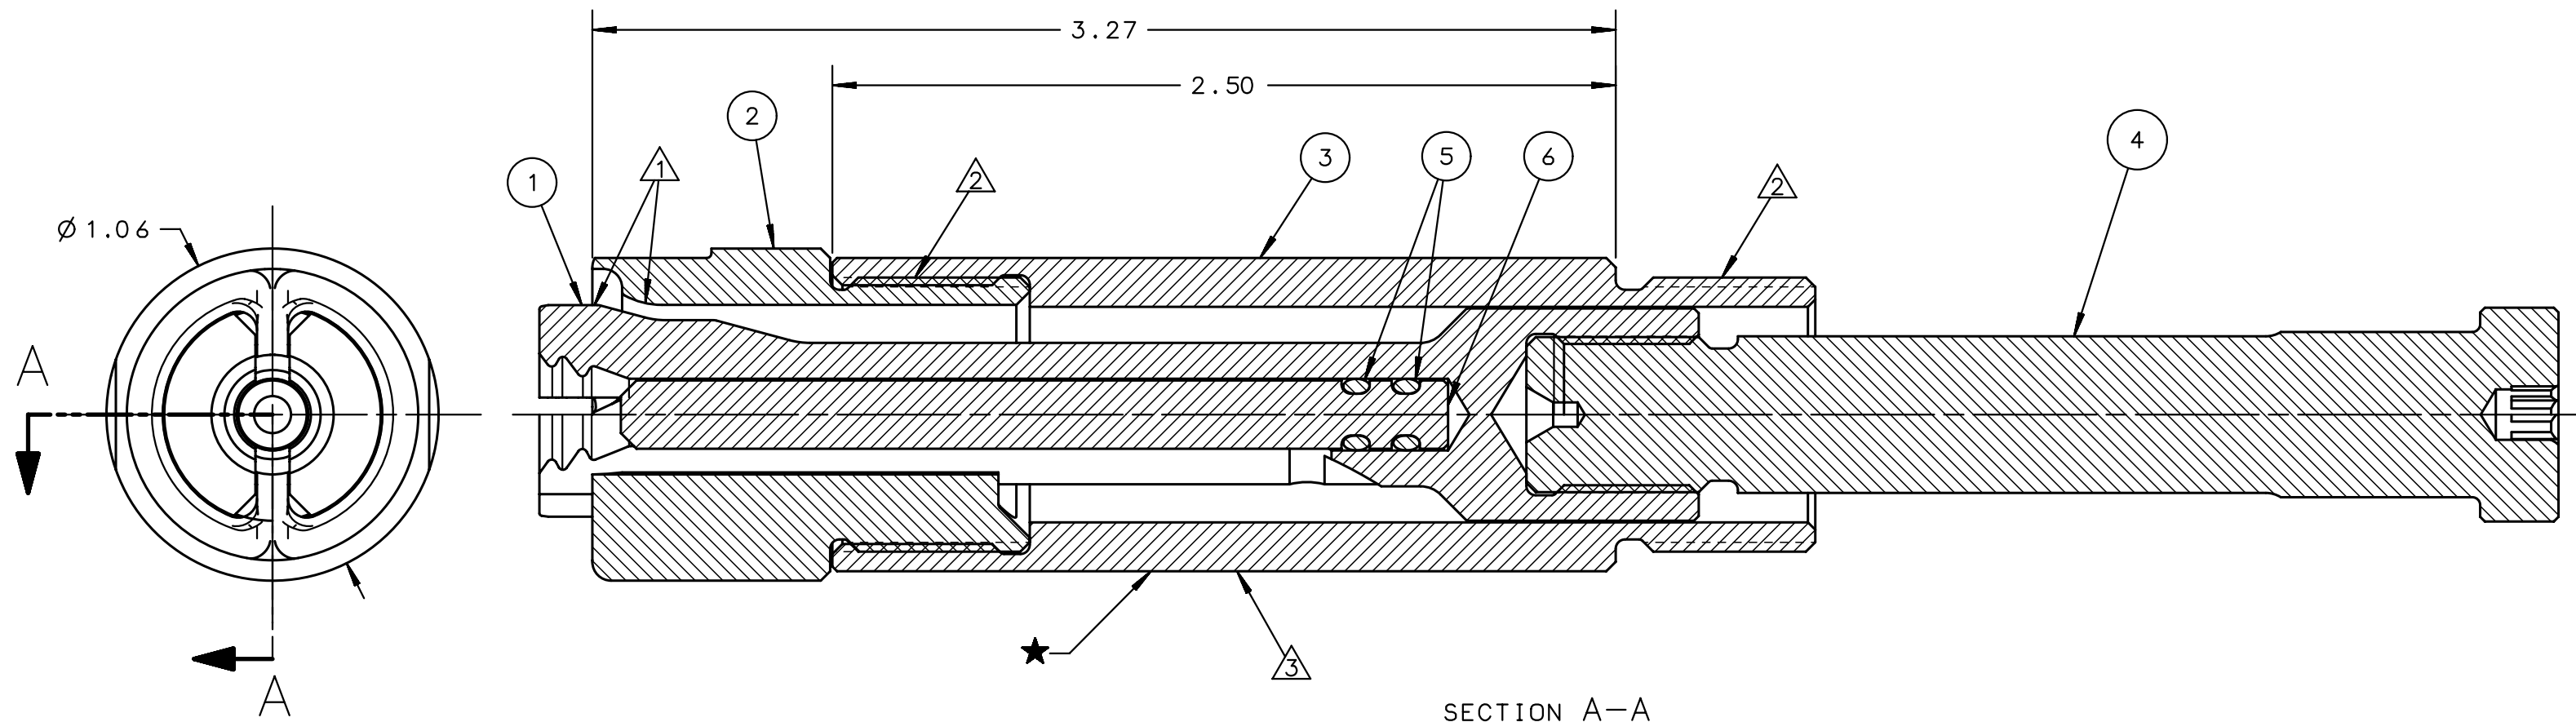

130261	1	LIMIT ROD, -12 BT	6
501009	2	O-RING AS568-005 C366Y D70	5
130329	1	EXTENSION, PULLER, SFBTT8, 2.5	4
129677	1	HOLDER, ANVIL, SFBTT8, 2.5	3
130062	1	ANVIL, CUT, SFBTT8, -12 BT	2
130328	1	PULLER, CUT, SFBTT8, -12 BT EX	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT	HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401		
ITAR/ECCN: EAR99	NOSE, CUT, -12 BT, 2.5 EXTENSION SFBTT8 TOOL		
SCH B#: 8467.99.0190	FINAL ASSY: -		
	ENG: CHR	CK:	DATE: 02/11/13 SCALE: 2:1
HTS: 8467.99.0190	B	99-7925CC	