


NOTES:

- 1 APPLY ANTI-SIEZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- 2 SHIP WITH STICKER P/N 590513, AFFIX TO TOOL AT INSTALLATION
- 3 APPLY LOCTITE 243 P/N: 508567 ON THESE THREADED JOINTS PER MFG'S INSTRUCTIONS DURING ASSEMBLY ON TOOL

REV	DESCRIPTION	DET	DATE
A	RELEASE	SMA	08/14/14
B	UPDATED VIEWS PER PULLER REVISION, UPDATED PART DESCRIPTIONS	HKS	2/23/16

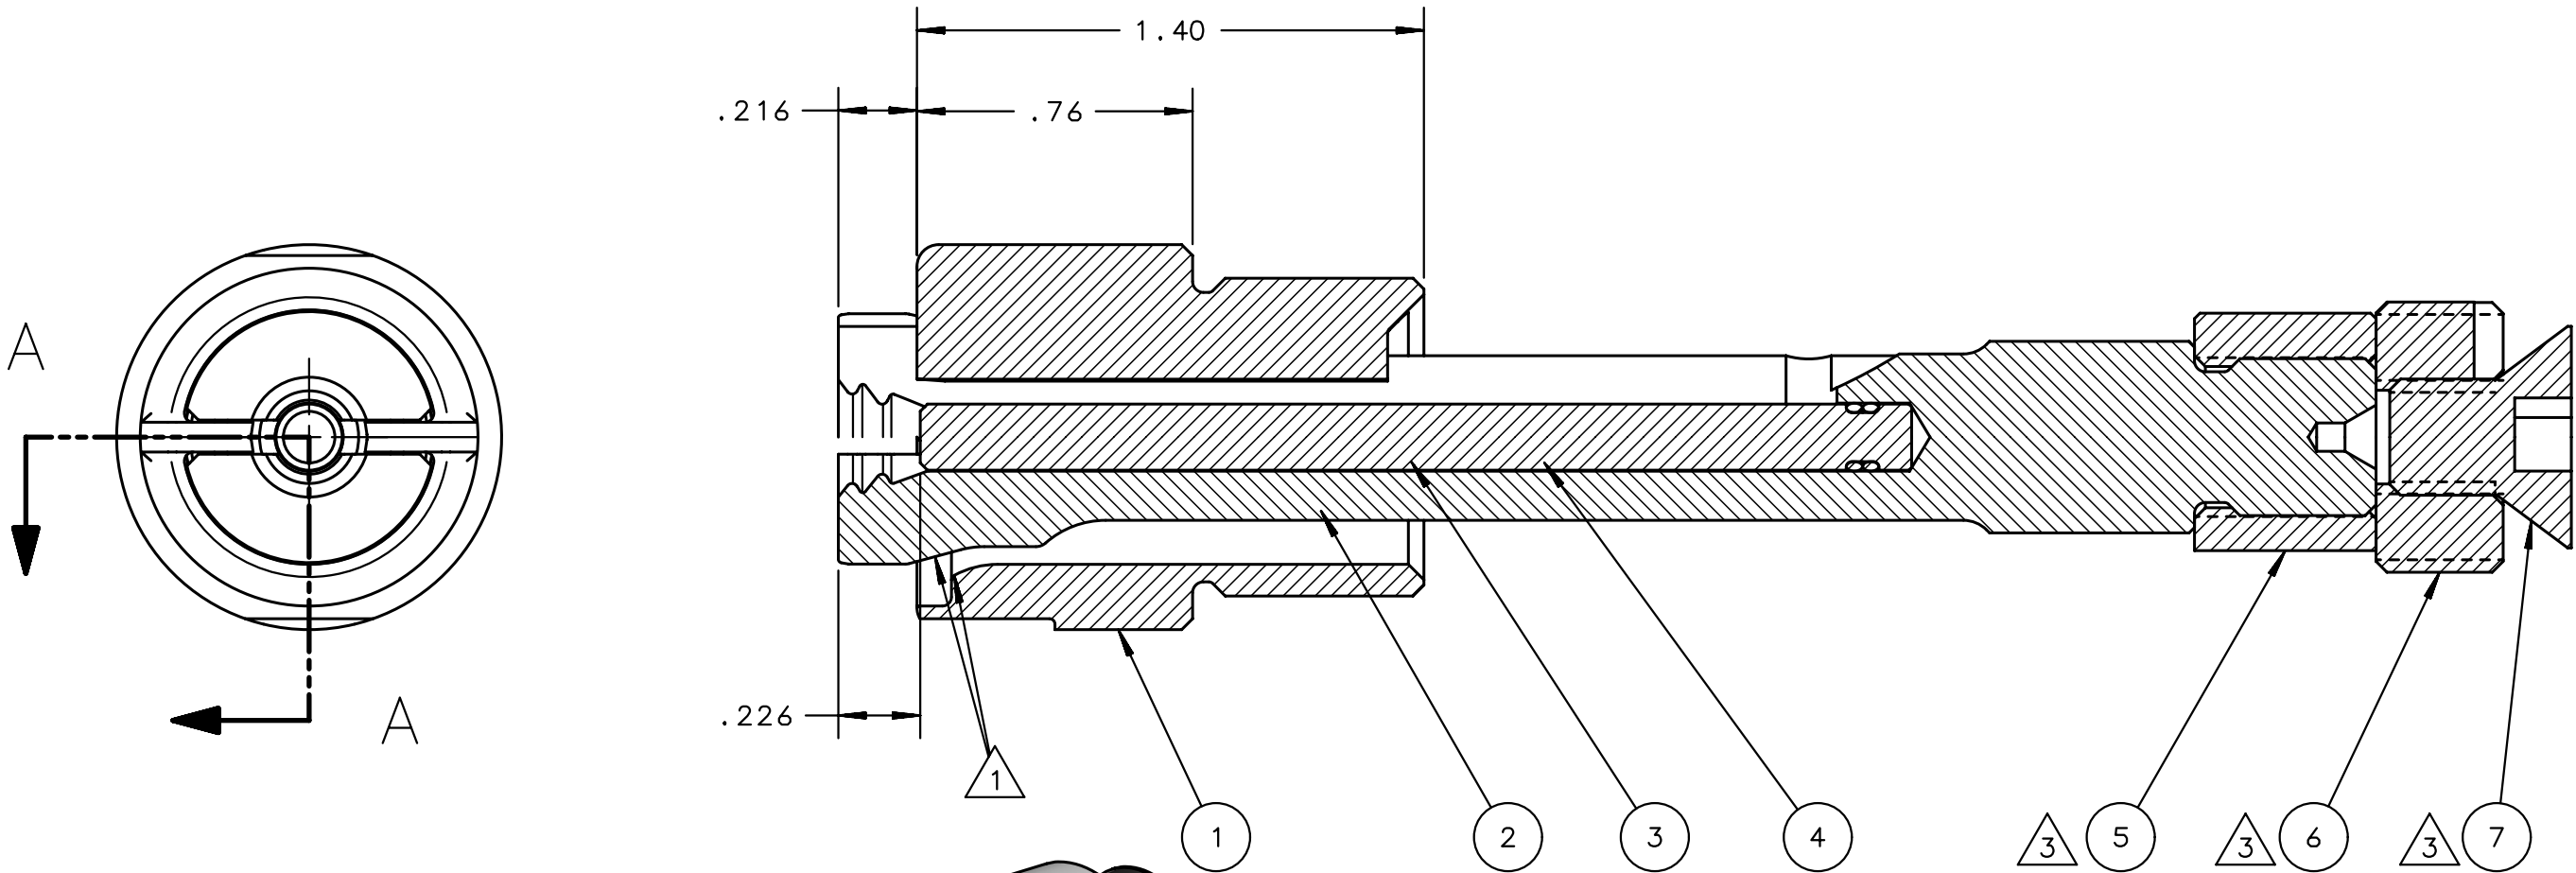

SECTION A-A

590513	1	STICKER, PINCH POINT	8
504298	1	FHCS .31-18 X .50	7
130332	1	LOCKSCREW, PULLER, SFBTT8	6
130331	1	NUT, PULLER, SFBTT8	5
508818	2	O-RING 70D BUNA-N .12IDX.031CS	4
130253	1	LIMIT ROD, PULLER, -10 BT	3
130715	1	PULLER, CUT, SFBTT8, -10 BT	2
130714	1	ANVIL, CUT, SFBTT8, -10 BT	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE, -10 BT, CUTTER SFBTT8 TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: SFBTT8	
HTS: 8467.99.0190		ENG: SMA CK: DATE: 08/14/14 SCALE: 2:1	
		B	99-7929CC