


REV	DESCRIPTION	DET	DATE
A	RELEASE	CHR	09/30/13

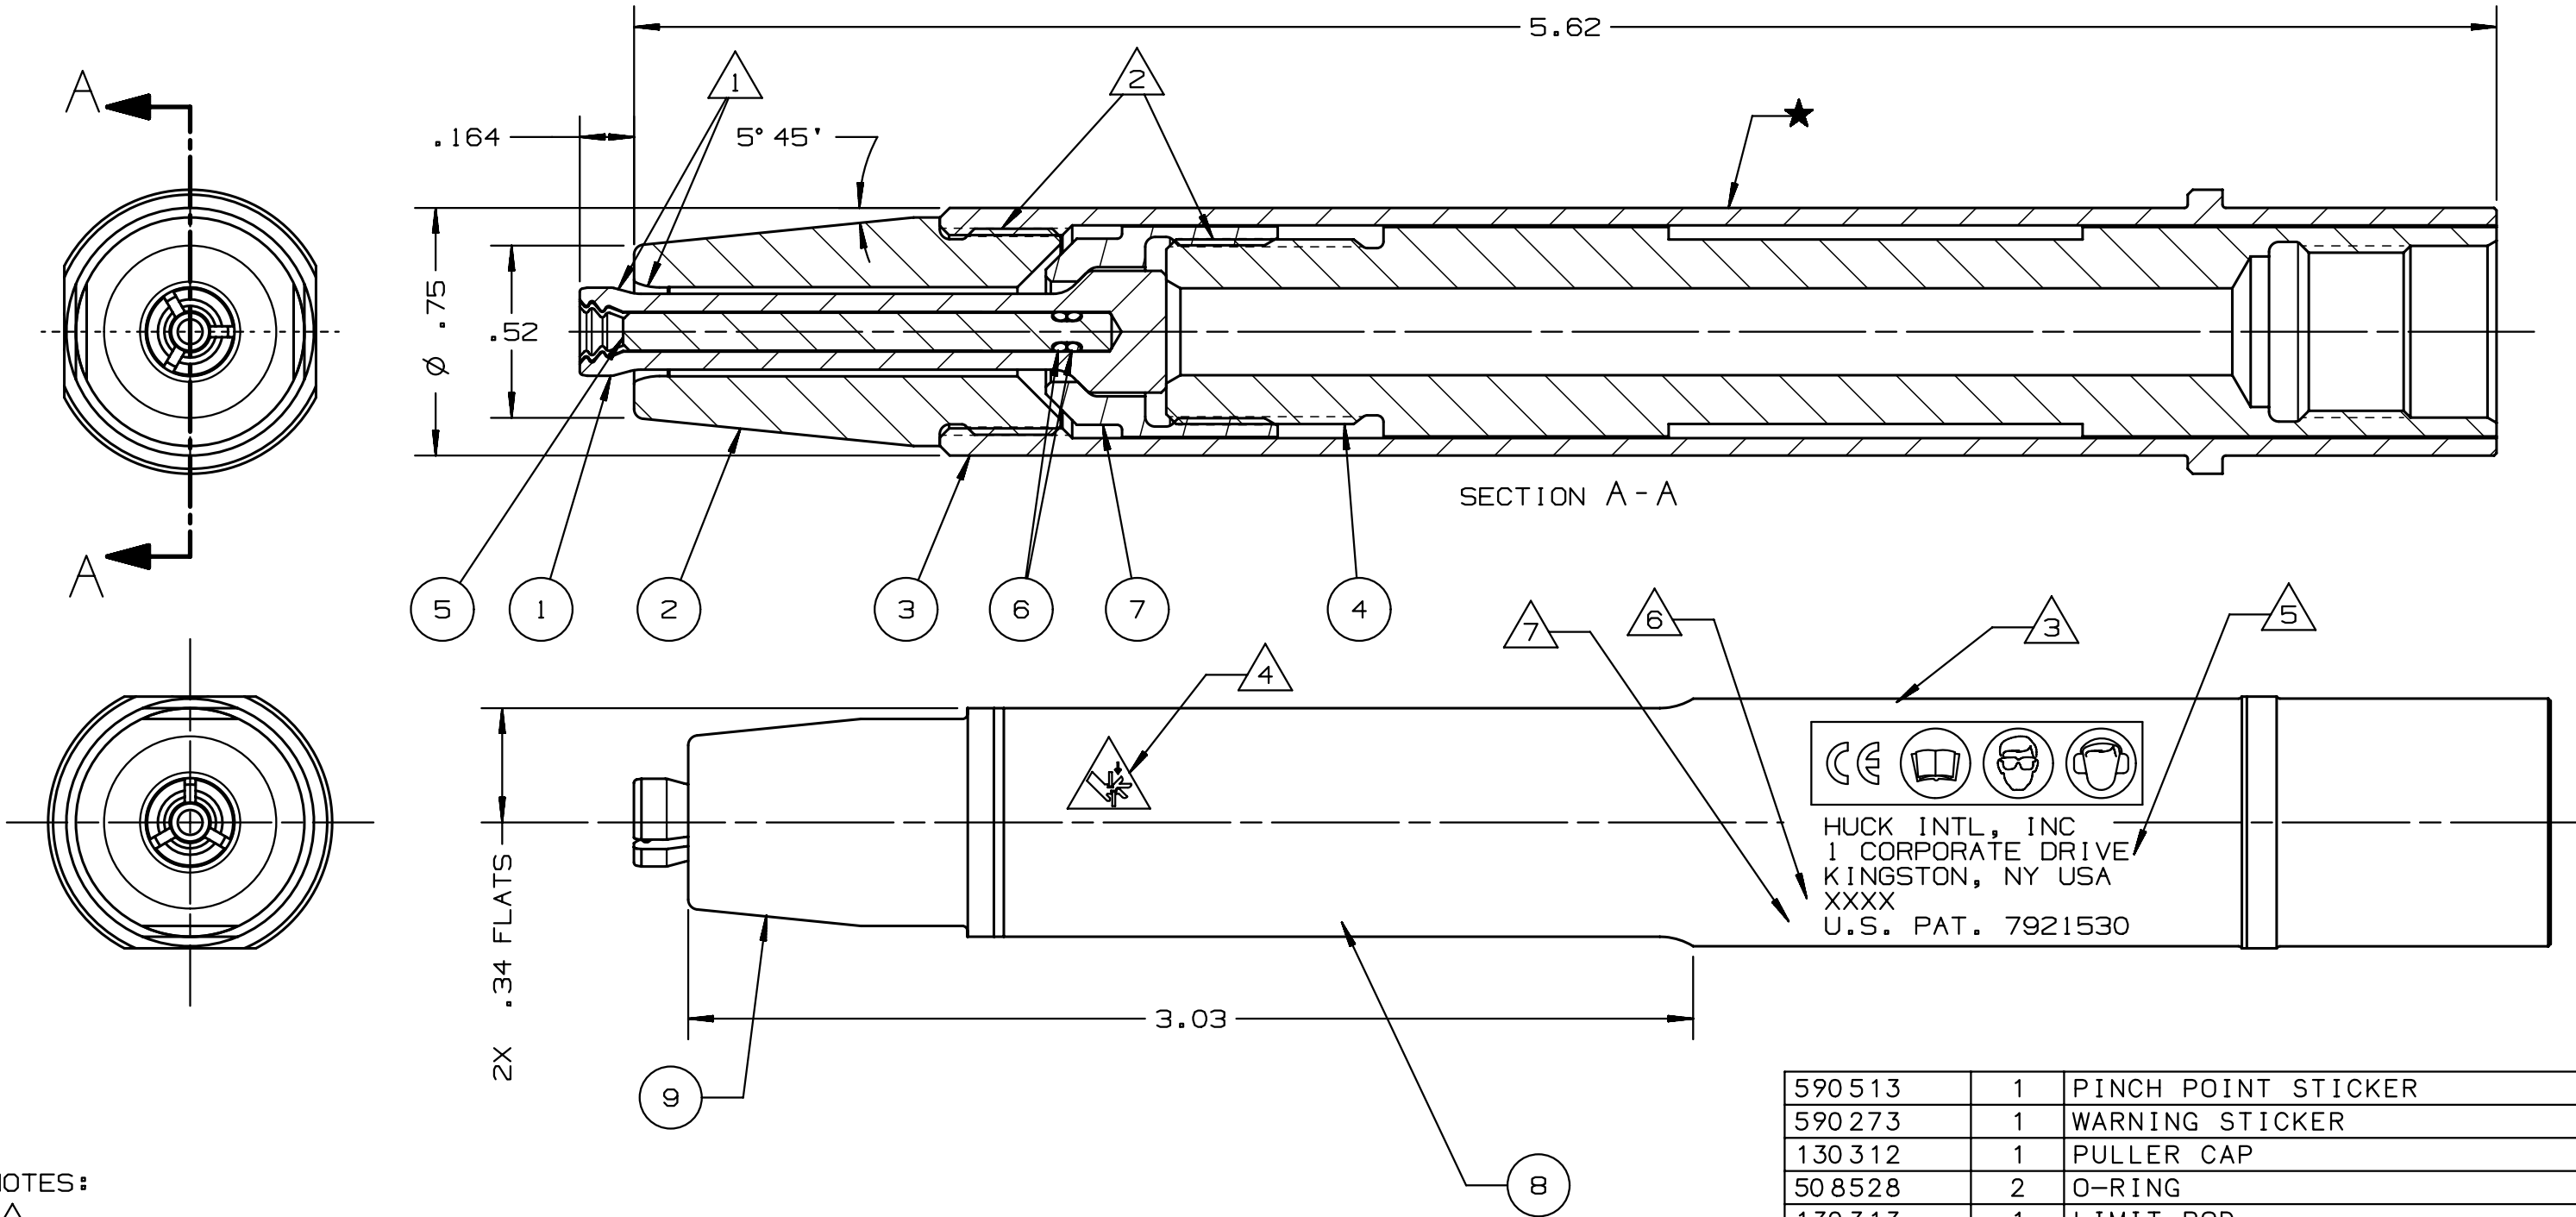

NOTES:

- 1 APPLY ANTI-SEIZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- 2 APPLY LOCTITE 242 P/N: 505316 TO THESE THREADED JOINTS PER MFR'S INSTRUCTIONS DURING ASSEMBLY ON TOOL.
- 3 ETCH CE GRAPHIC APPROXIAMTELY AS SHOWN
- 4 ETCH HAND CRUSH GRAPHIC APPORXIAMTELY AS SHOWN
- 5 ETCH ADDRESS APPROXIMATELY AS SHOWN
- 6 ETCH YEAR OF MANUFACTURE DIRECTLY BELOW ADDRESS AS SHOWN
- 7 ETCH U.S. PAT. NUMBER 7921530 AS SHOWN

590513	1	PINCH POINT STICKER	9
590273	1	WARNING STICKER	8
130312	1	PULLER CAP	7
508528	2	O-RING	6
130313	1	LIMIT ROD	5
124359	1	SPINDLE EXTENSION	4
129902	1	ANVIL HOLDER	3
130404	1	ANVIL, 3/16"	2
130311	1	PULLER	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		CHISEL NOSE ASSEMBLY 3/16" BOBTAIL, 2480 TOOL	
SCH B#: 8467.99.0190		FINAL ASSY: -	
HTS: 8467.99.0190		ENG: CHR CK: DATE: 09/30/13 SCALE: 2:1	
		B	99-7931-1CH