



NOTES:

- 1 APPLY ANTI-SEIZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- 2 APPLY LOCTITE 242 P/N: 505316 TO THESE THREADED JOINTS PER MFR'S INSTRUCTIONS DURING ASSEMBLY ON TOOL.
- 3 ETCH HAND CRUSH GRAPHIC APPROXIMATELY AS SHOWN

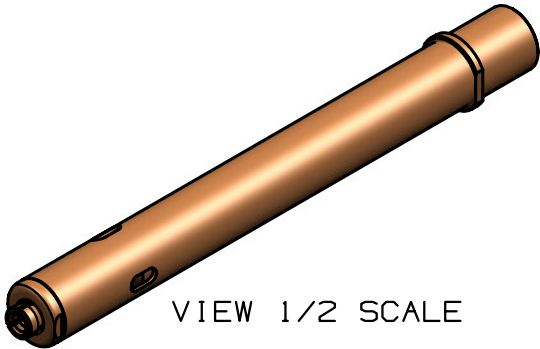

VIEW 1/2 SCALE

REV	DESCRIPTION	DET	DATE
A	RELEASE	CHR	09/27/13
B	124358 WAS 129358 WAS A TYPING ERROR	CHR	03/10/14
C	129406 WAS 129897	CHR	07/09/14
D	UPDATED DRAWING SHOWING ADDING OF CLEAN OUT SLOTS TO 129406 ANVIL HOLDER. REMOVED ADDRESS AND CE ETCHING NOTES 3,5,6 AND 7	CHR	10/17/17

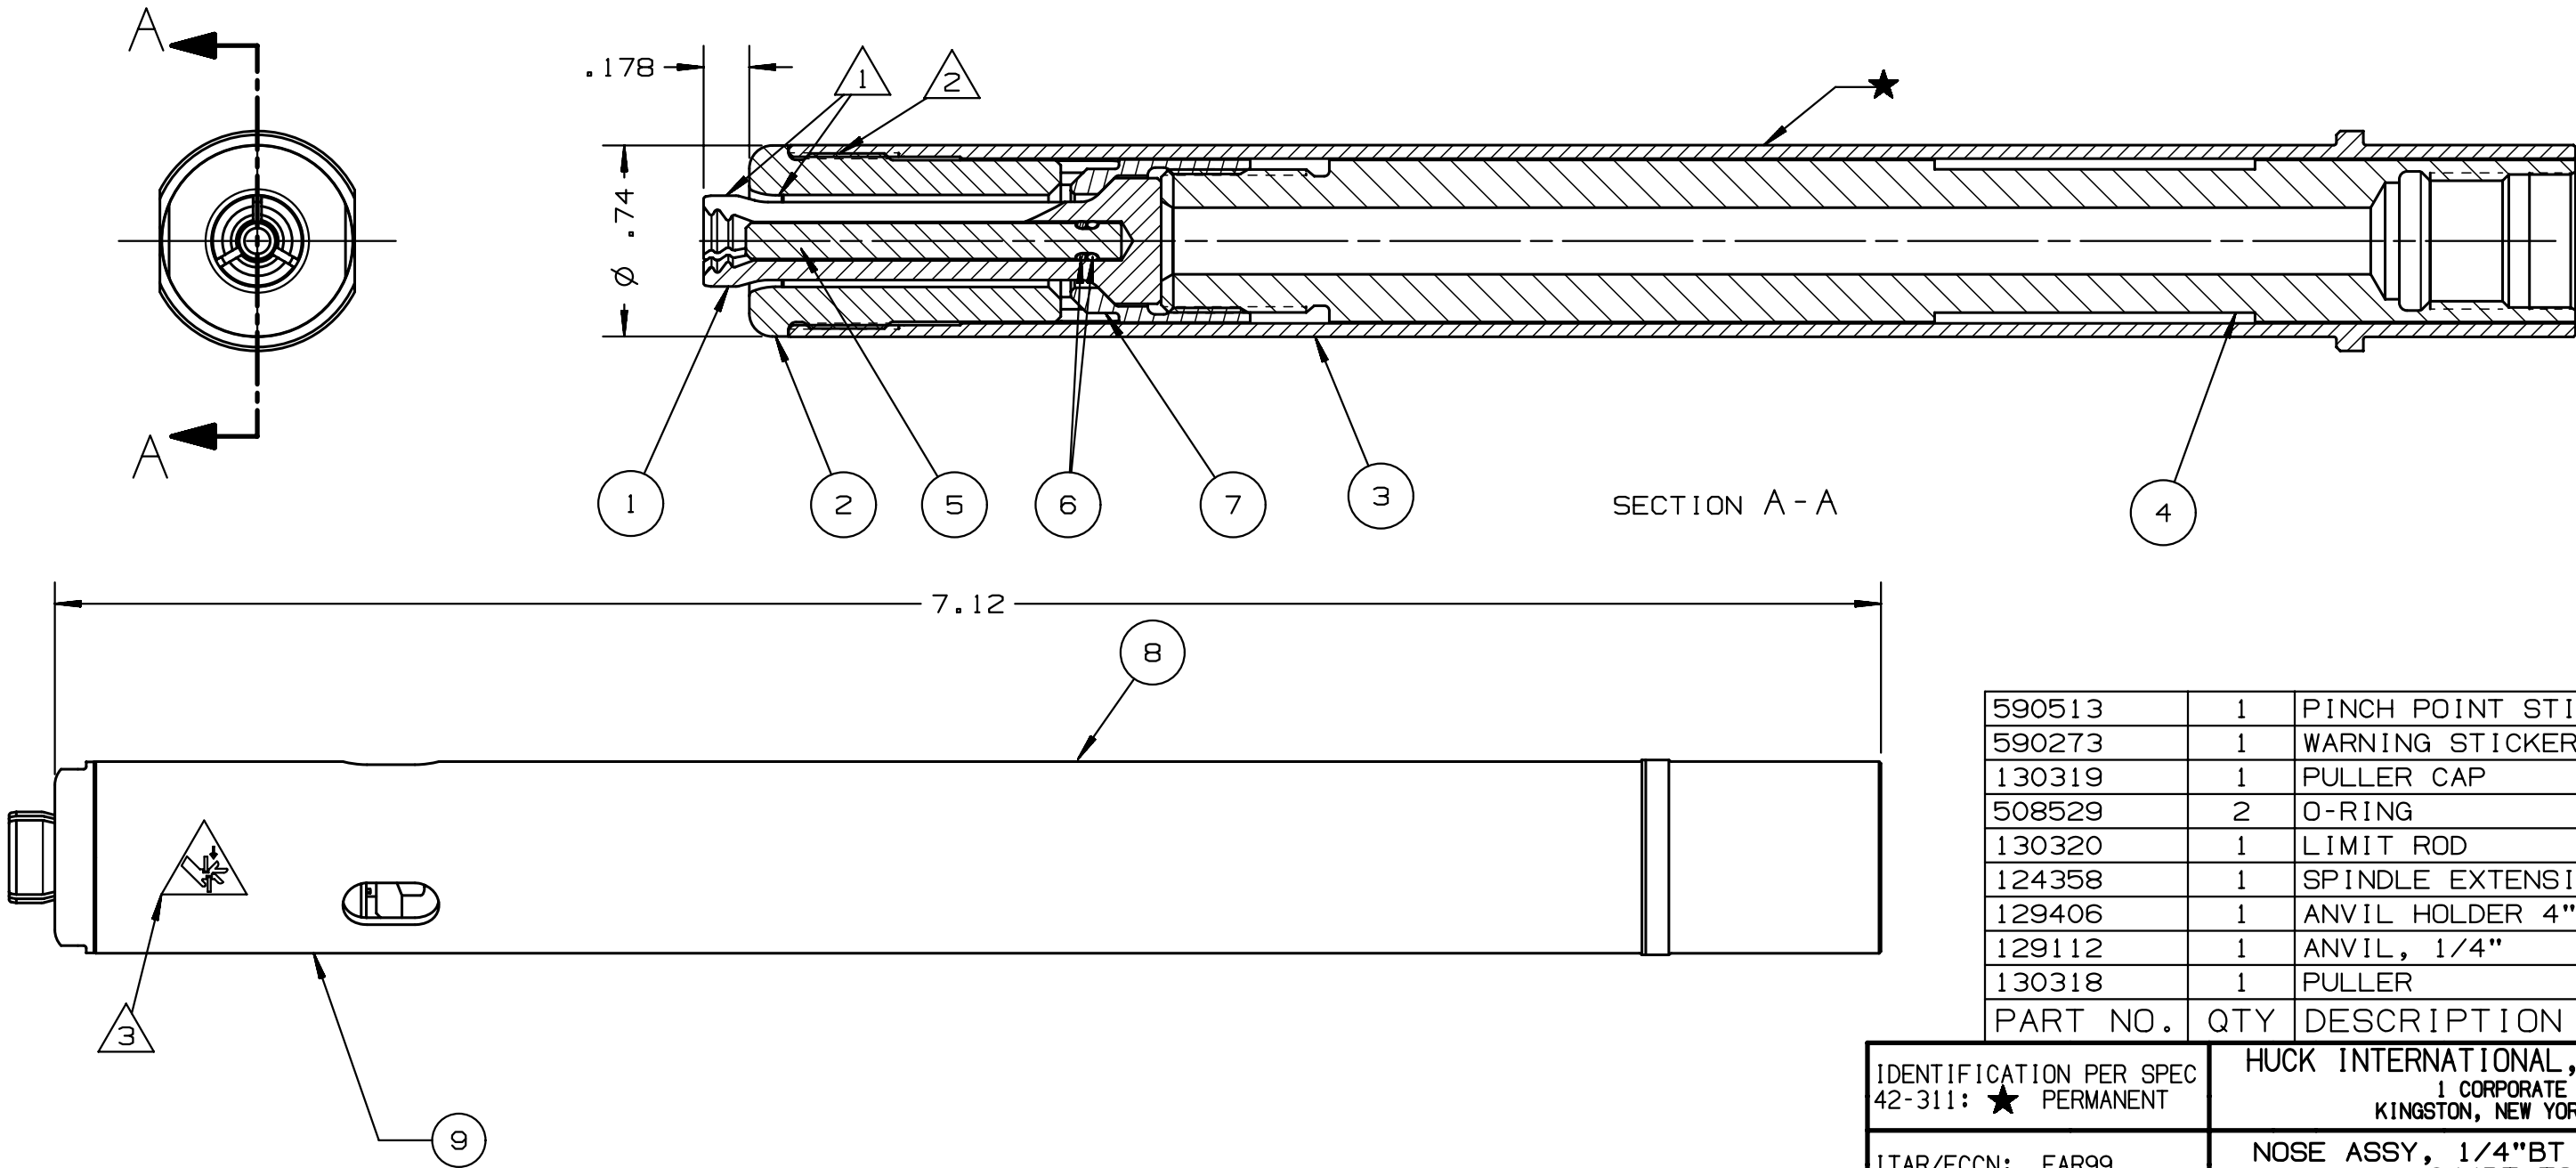

590513	1	PINCH POINT STICKER	9
590273	1	WARNING STICKER	8
130319	1	PULLER CAP	7
508529	2	O-RING	6
130320	1	LIMIT ROD	5
124358	1	SPINDLE EXTENSION	4
129406	1	ANVIL HOLDER 4" EXT	3
129112	1	ANVIL, 1/4"	2
130318	1	PULLER	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ PERMANENT	HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401		
ITAR/ECCN: EAR99	NOSE ASSY, 1/4"BT 4" EXTENDED 244BT TOOL		
SCH B#: 8467.99.0190	FINAL ASSY: -		
HTS: 8467.99.0190	ENG: HKS	CK: DATE: 09/27/13	SCALE: 2:1
B		99-7932-4	