
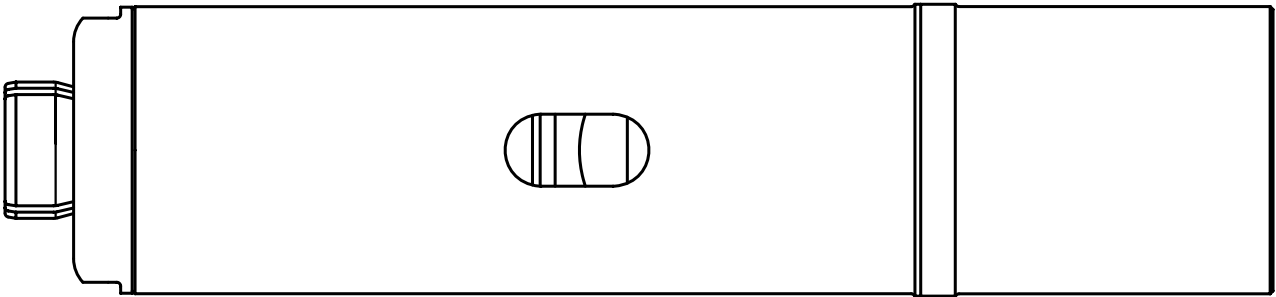
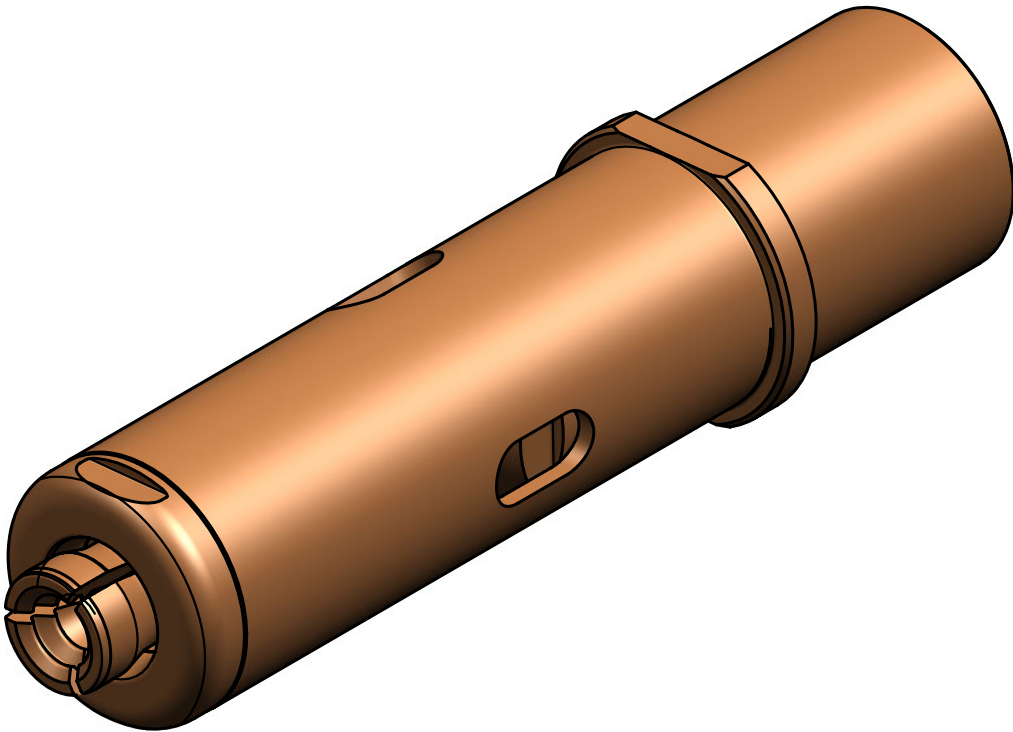


NOTES:

- 1 APPLY ANTI-SIEZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- 2 APPLY LOCTITE 243 P/N: 508567 ON THESE THREADED JOINTS PER MFG'S INSTRUCTIONS DURING ASSEMBLY ON TOOL
- (B) 3 APPLY WARNING STICKERS P/N 590273 AND P/N 590513

REV	DESCRIPTION	DET	DATE
A	RELEASE	HKS	12/08/15
B	ADDED CLEAN-OUT SLOT IN ANVIL HOLDER, ADDED NOTE 3, ADDED 590513 PINCH POINT STICKER	SMA	03/20/17

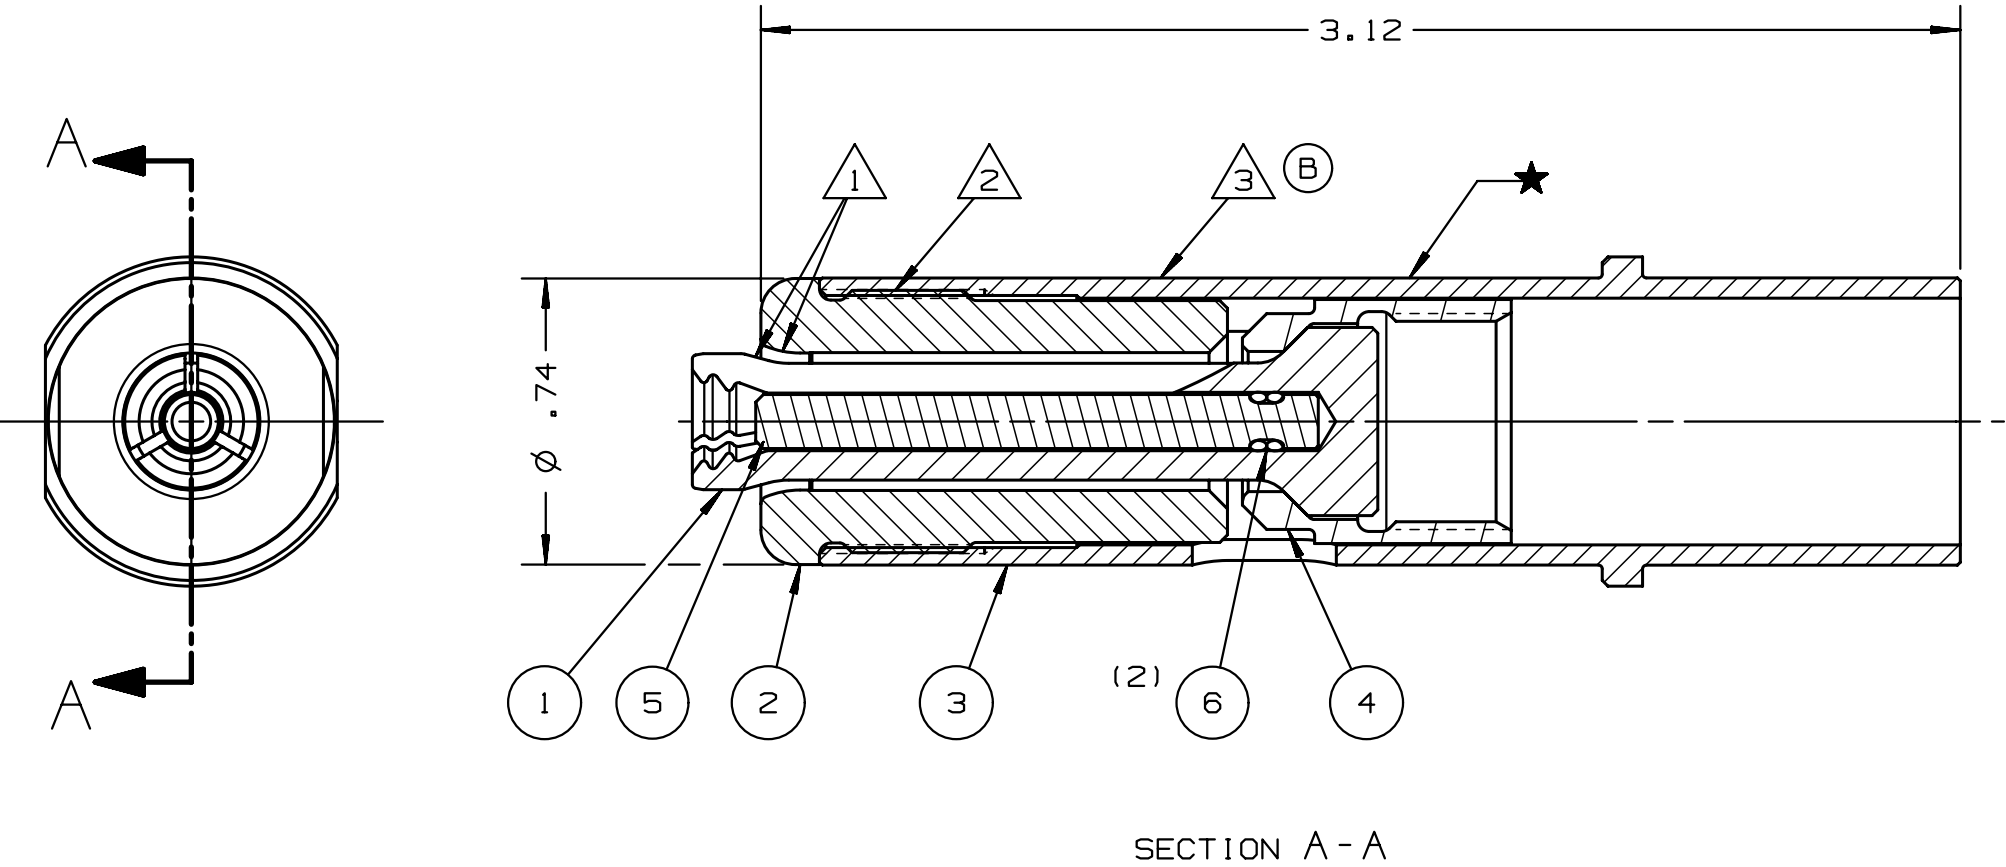

(B)	590513	1	STICKER, PINCH POINT	8
	590273	1	STICKER, WARNING, MOVING PARTS	7
	508529	2	O-RING .094 ID X .032 CS	6
	130320	1	LIMIT ROD, PULLER, -08 BT	5
	130319	1	PULLER CAP -08 BT	4
	129113	1	HOLDER, ANVIL, 244BT	3
	129112	1	ANVIL, 244BT, -08 BT	2
	130318	1	PULLER, 244BT, -08	1
PART NO.		QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ PERMANENT			HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99			NOSE, -08 BT A1100 TOOL	
SCH B#: 8467.99.0190			FINAL ASSY: -	
HTS: 8467.99.0190			ENG: SMA	CK: DATE: 12/08/15 SCALE: 2:1
			B	99-7932L