
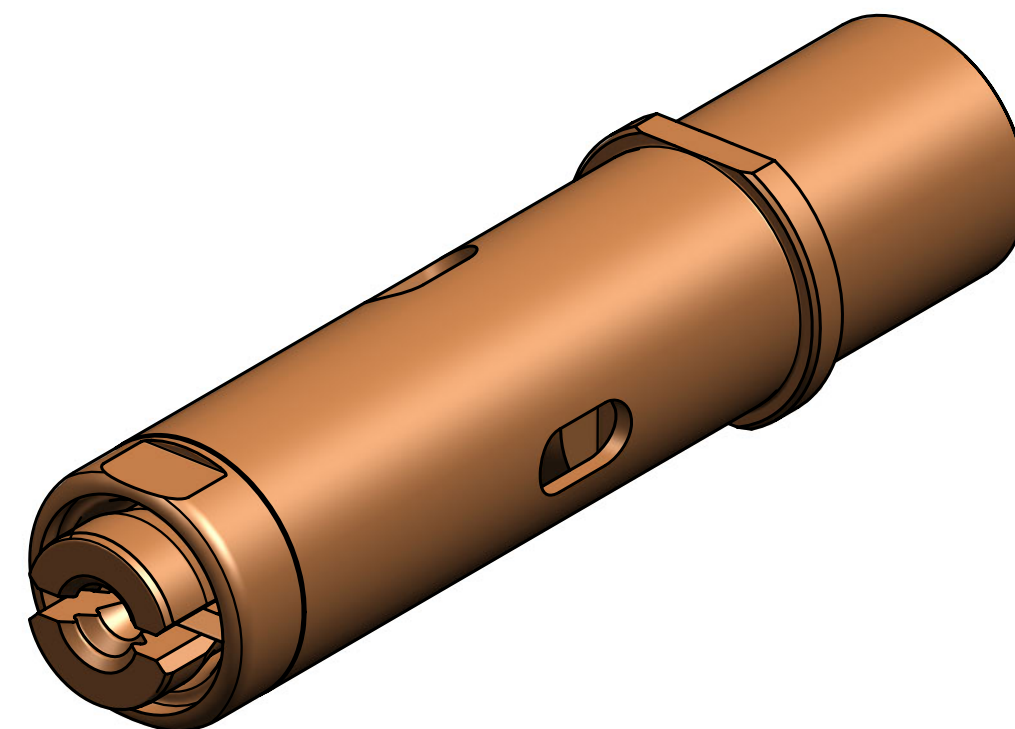


NOTES:

- ① △ APPLY ANTI-SIEZE LUBRICANT P/N: 508183 OR EQUIVALENT TO OUTSIDE OF PULLER AND INSIDE OF ANVIL.
- ② △ APPLY LOCTITE 243 P/N: 508567 ON THESE THREADED JOINTS PER MFG'S INSTRUCTIONS DURING ASSEMBLY ON TOOL
- ③ △ APPLY WARNING STICKERS P/N 590273 AND P/N 590513

REV	DESCRIPTION	DET	DATE
A	RELEASE	HKS	12/08/15
B	UPDATED VIEWS; ADDED ITEM 5 (508529) & ITEM 6 (130320)	SMA	02/23/16
C	ADDED CLEAN-OUT SLOT IN ANVIL HOLDER, LOCTITE 243 WAS LOCTITE 242, ADDED NOTE 3, ADDED 590513 PINCH POINT STICKER	SMA	03/20/17

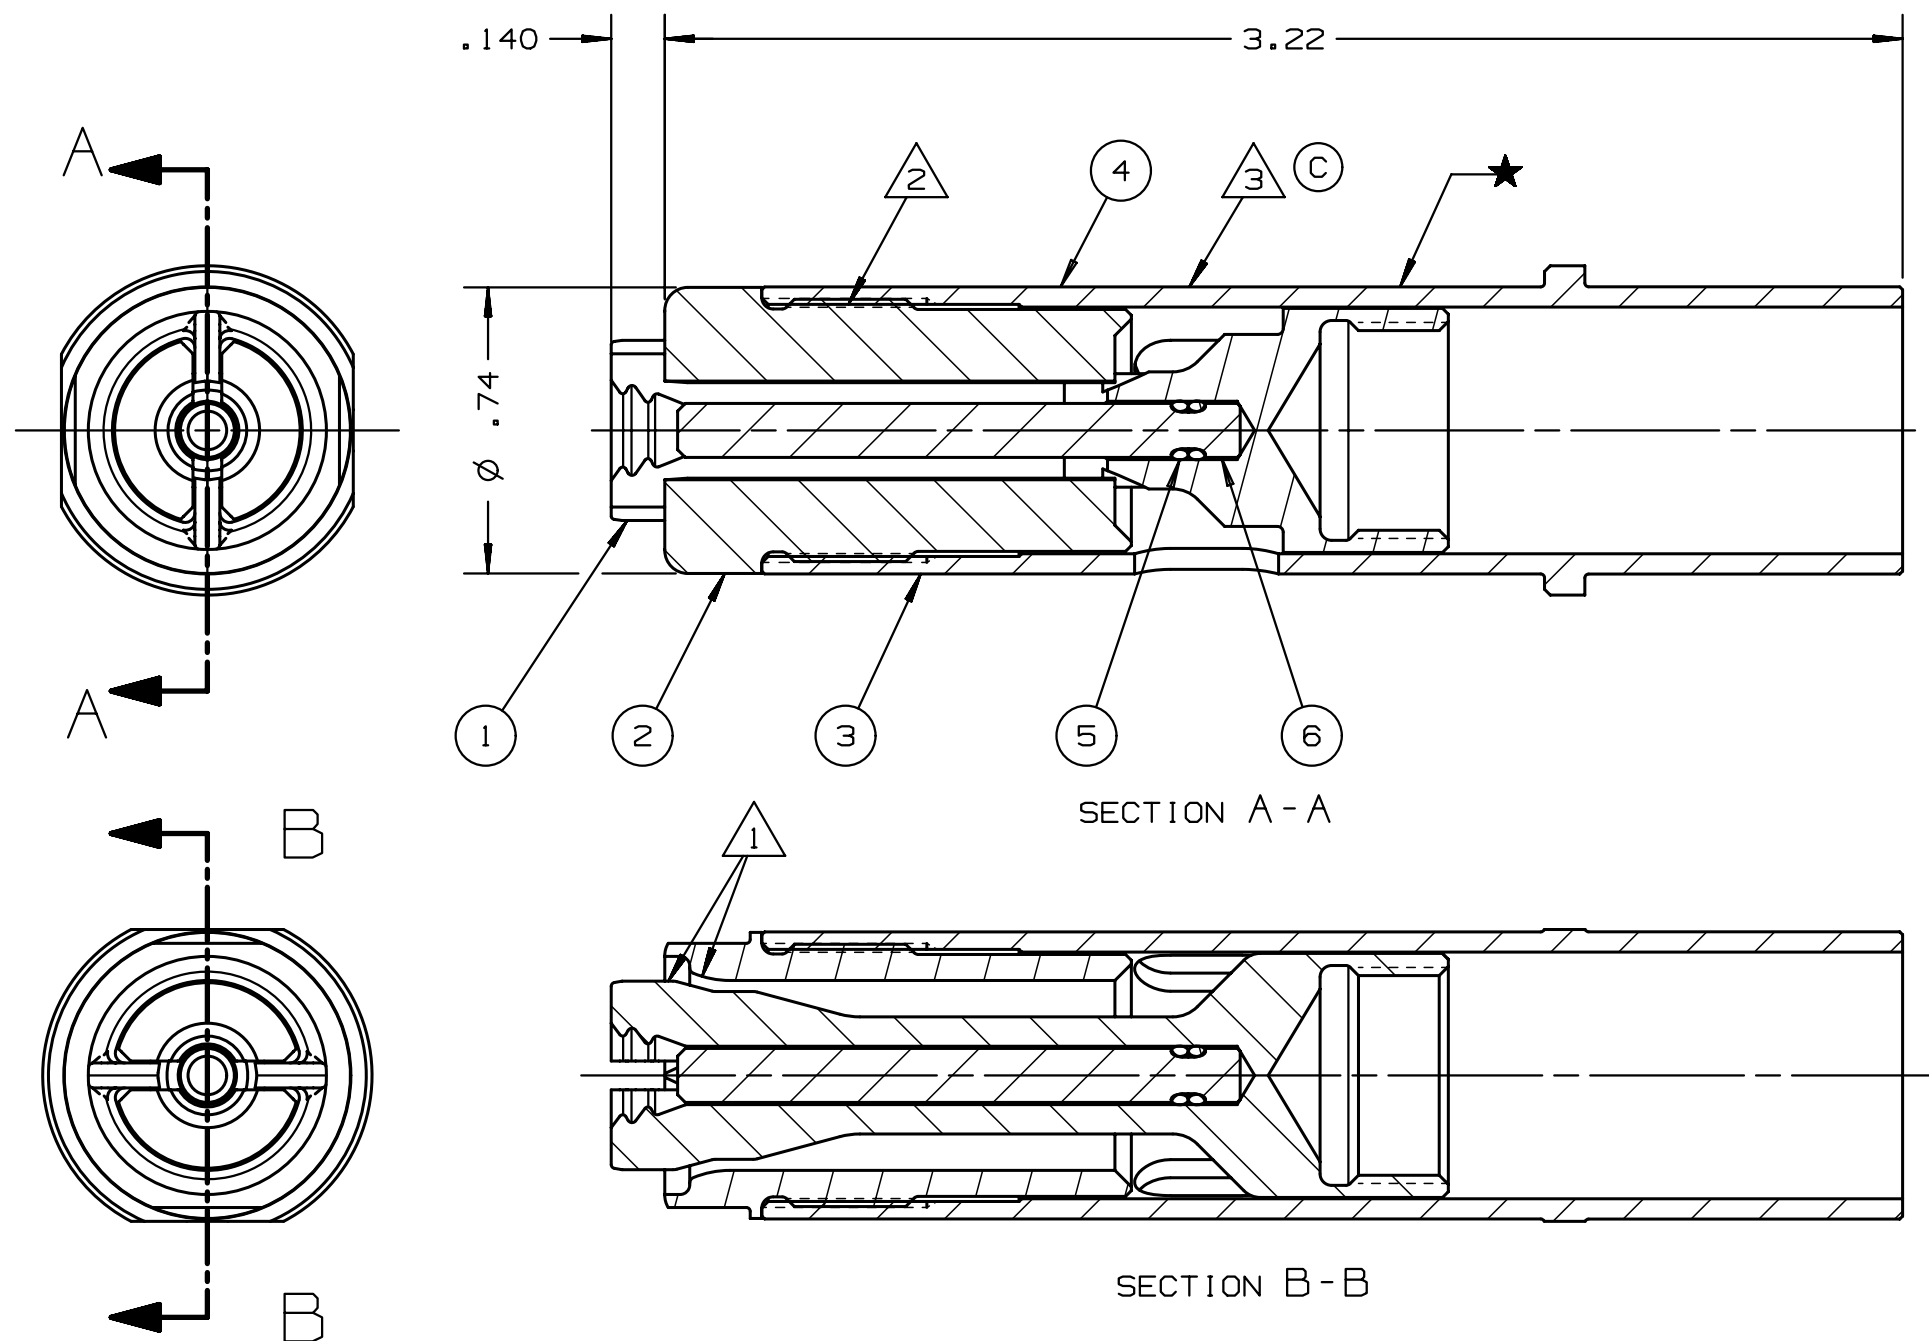

⑤	590513	1	STICKER, PINCH POINT	7
	130320	1	LIMIT ROD, PULLER, -08 BT	6
	508529	2	O-RING	5
	590273	1	STICKER, WARNING, MOVING PARTS	4
	129113	1	HOLDER, ANVIL, 244BT	3
	129747	1	ANVIL, CUT, 244BT, -08 BT	2
	129748	1	PULLER, CUT, 244BT, -08 BT	1
PART NO.		QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ PERMANENT			HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99			NOSE, CUT, -08 BT A1100 TOOL	
SCH B#: 8467.99.0190			FINAL ASSY:	
HTS: 8467.99.0190			ENG: SMA	CK: DATE: 12/08/15 SCALE: 2:1
			B	99-7932LCC