
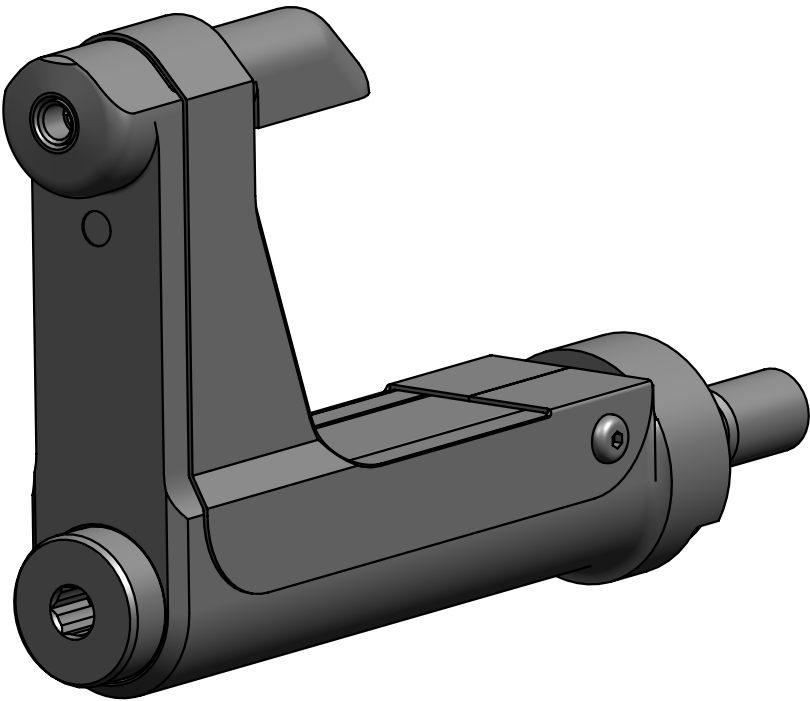


REV	DESCRIPTION	DET	DATE
A	RELEASE	NDG	03/08/17

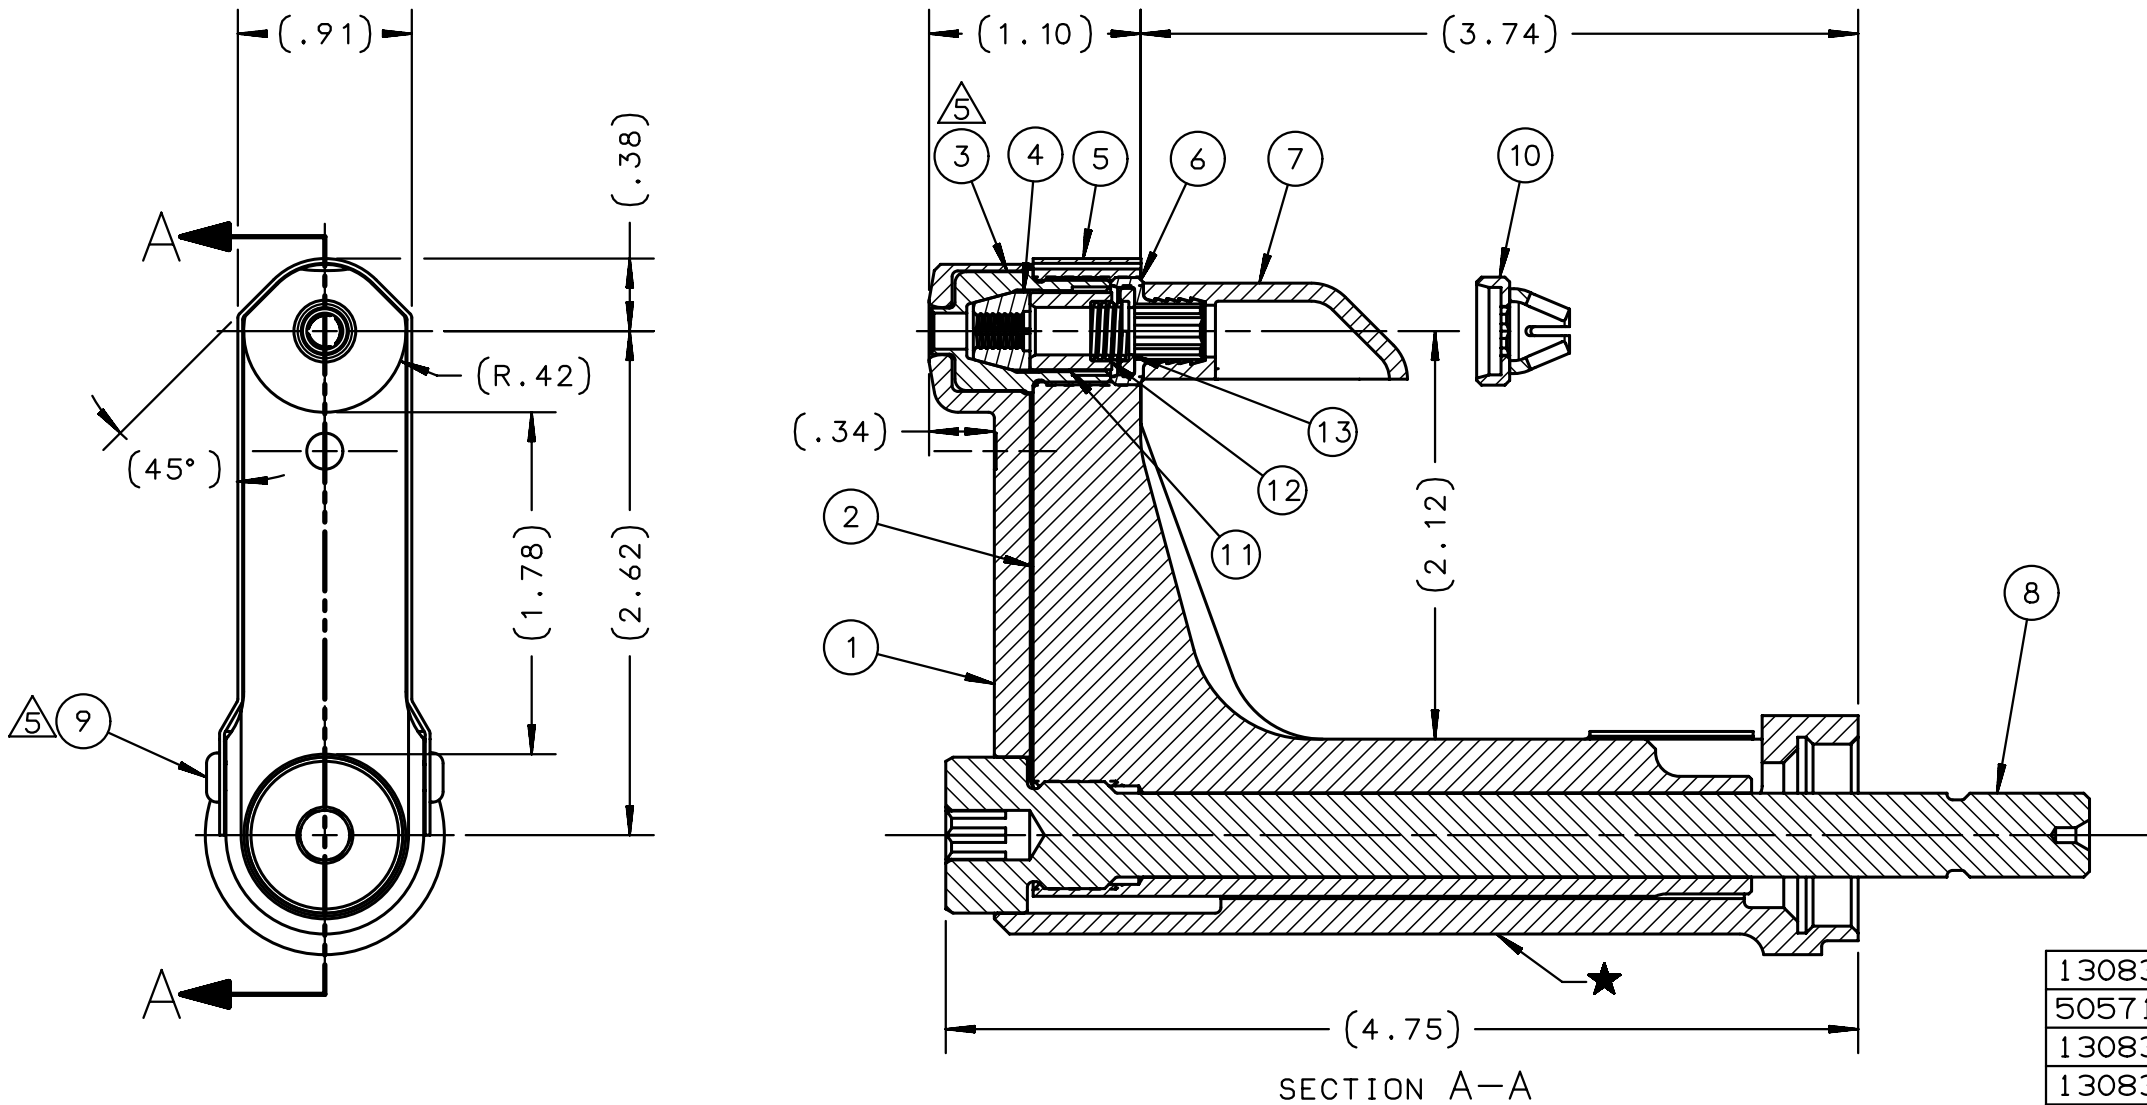

NOTES:

- 1 MAXIMUM RECOMMENDED STROKE: .562
 - 2 FOR USE WITH THE 225/245 TOOL, USE ATTACHMENT P/N 119400 AND STROKE LIMITER 118362
 - 3 FOR USE WITH 2500 TOOL, USE ATTACHMENT P/N 119400 AND STROKE LIMITER KIT 119888
 - 4 FOR OTHER TOOLS AND/OR OTHER TOOL AND STROKE COMBINATIONS, CONSULT ENGINEERING DEPARTMENT
- △ 5 APPLY LOCTITE 243 PER MANUFACTURERS' INSTRUCTION

130836	1	LOCATOR	13
505717	1	SPRING	12
130838	1	FOLLOWER	11
130830	1	DEFLECTOR, UNITIZED	10
508357	2	B.H.C.S., #6-32	9
131087	1	DRAWBAR	8
120095	1	DEFLECTOR	7
130832	1	RETAINER, BARBED	6
131088	1	GUARD, WRAP AROUND	5
130053	1	CHUCK JAW, UNITIZED	4
130864	1	CARTRIDGE, COLLET	3
131086	1	HOUSING, COLLET	2
131085	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM
IDENTIFICATION PER SPEC 42-311: ★ PERMANENT		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY -06 LGP, XL, STRADDLE	
SCH B#: 8467.99.0190		FINAL ASSY: FOR USE WITH 206 STYLE TOOLS	
HTS: 8467.99.0190		ENG: NDG CK: DATE: 03/08/17 SCALE: 1:1	
		B	99LGP-06-ZXAD