



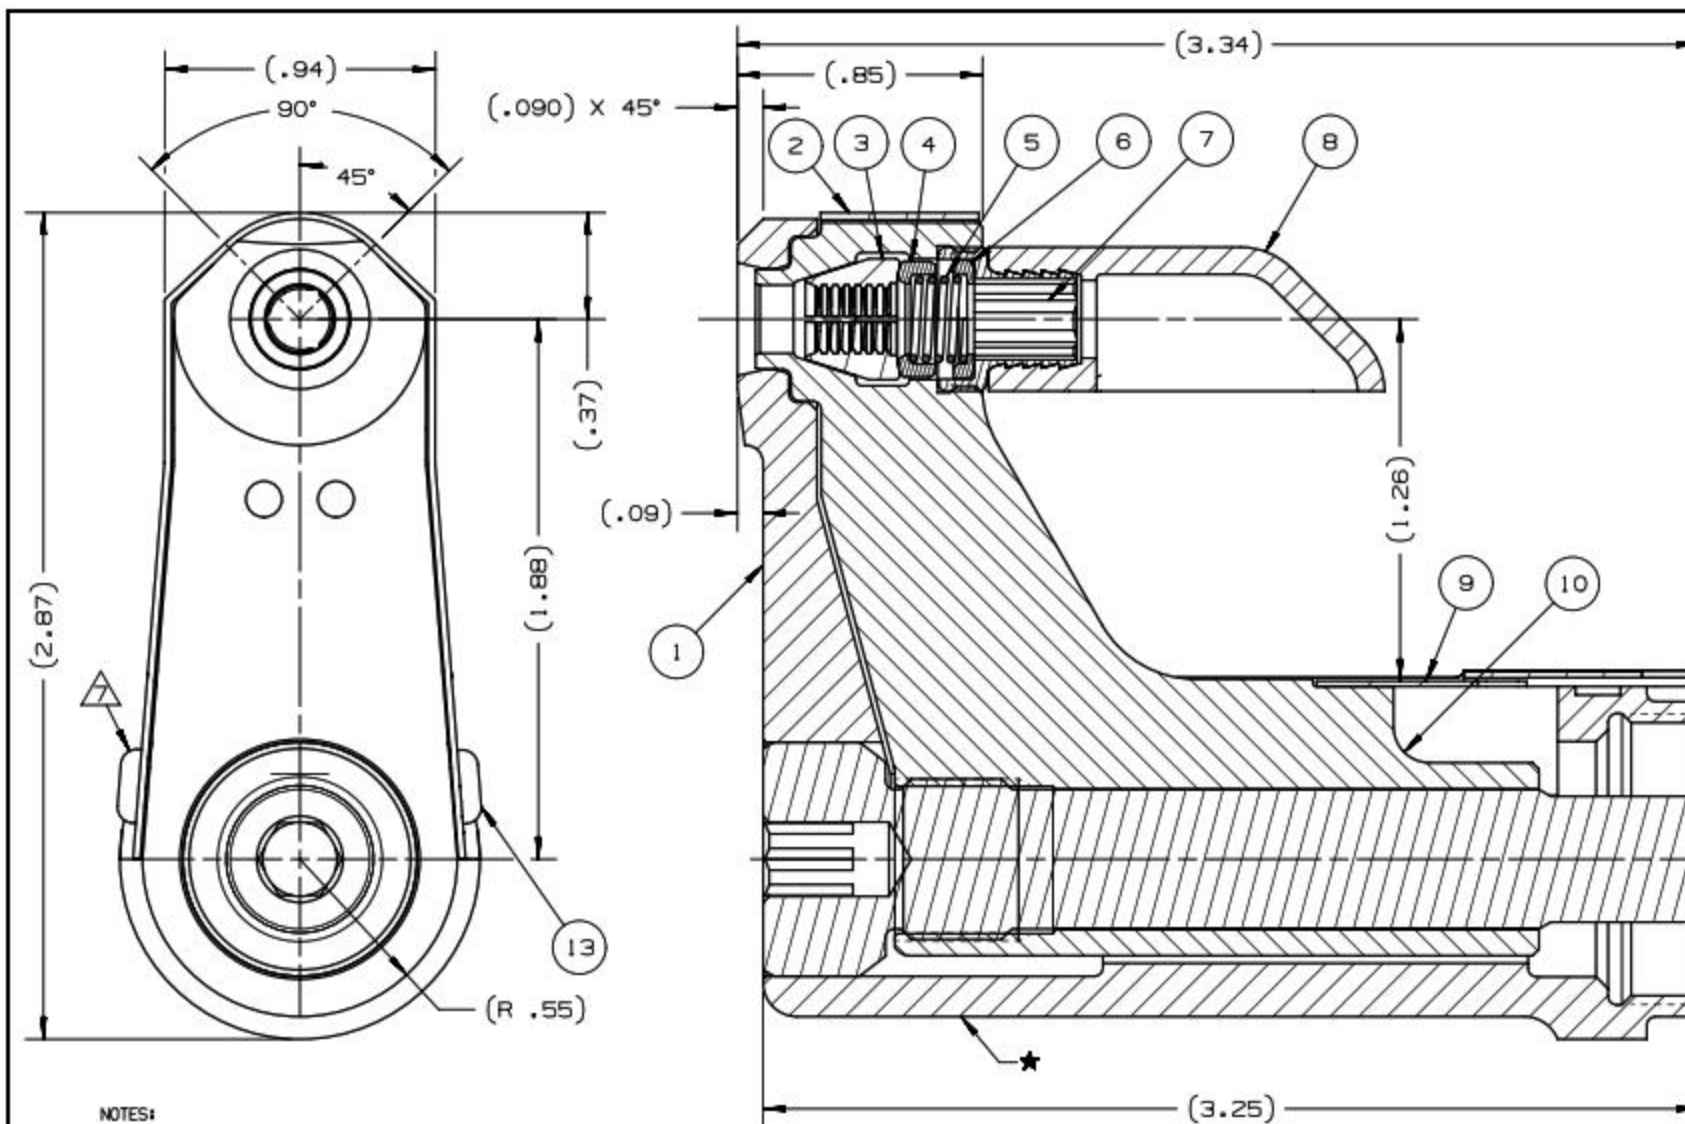

NOTES:

- 1 MAXIMUM RECOMMENDED STROKE: .562
- 2 FOR USE WITH THE 225/245 TOOL, USE ATTACHMENT P/N 119400-1 AND STROKE LIMITER 118362
- 3 FOR USE WITH 2500 TOOL, USE ATTACHMENT P/N 119400-1 AND STROKE LIMITER KIT 119888
- 4 FOR OTHER TOOLS AND/OR OTHER TOOL AND STROKE COMBINATIONS, CONSULT ENGINEERING DEPARTMENT
- 5 SHIP WITH STOP 126747
- 6 SHIP WITH DEFLECTOR 126748-1
- △ APPLY LOCTITE 243 TO SCREW THREADS



REV	DESCRIPTION	DET	DATE
A	RELEASE	HKS	11/17/14



508511	2	#6-32 B.H.C.S.	13
126748-1	1	UNITIZED DEFLECTOR	12
130487	1	DRAWBAR	11
130506-C2	1	COLLET	10
130326-1	1	GUARD	9
120095	1	DEFLECTOR	8
122912	1	BARBED RETAINER	7
122449	1	LOCATOR	6
505717	1	SPRING, COMPRESSION	5
118207	1	FOLLOWER	4
130406	1	CHUCK JAW	3
130322-1	1	TOP GUARD	2
130504-C2	1	ANVIL	1
PART NO.	QTY	DESCRIPTION	ITEM

IDENTIFICATION PER SPEC 42-311: ★ ETCH		HUCK INTERNATIONAL, INC., I.S.D 1 CORPORATE DR KINGSTON, NEW YORK 12401	
ITAR/ECCN: EAR99		NOSE ASSEMBLY 6MM OFFSET LONG - C2	
SCH B#: 8467.99.0190		FINAL ASSY:	
HTS: 8467.99.0190		ENG: NDG	DATE: 11/17/14
		OK:	SCALE: 2:1
		B	RR-3702-1-C2