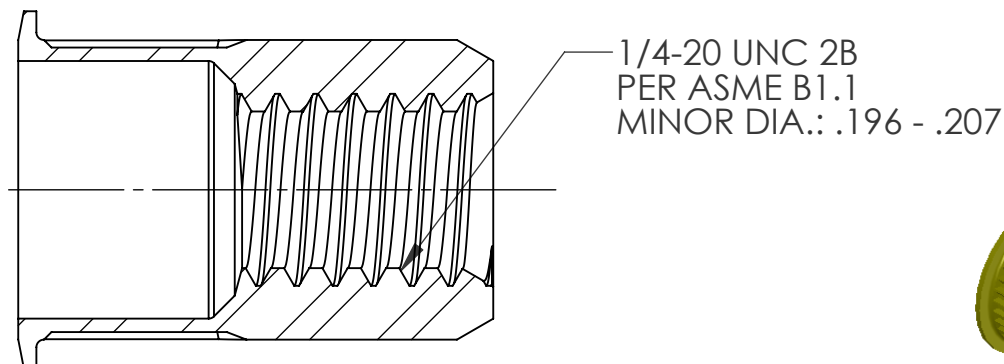
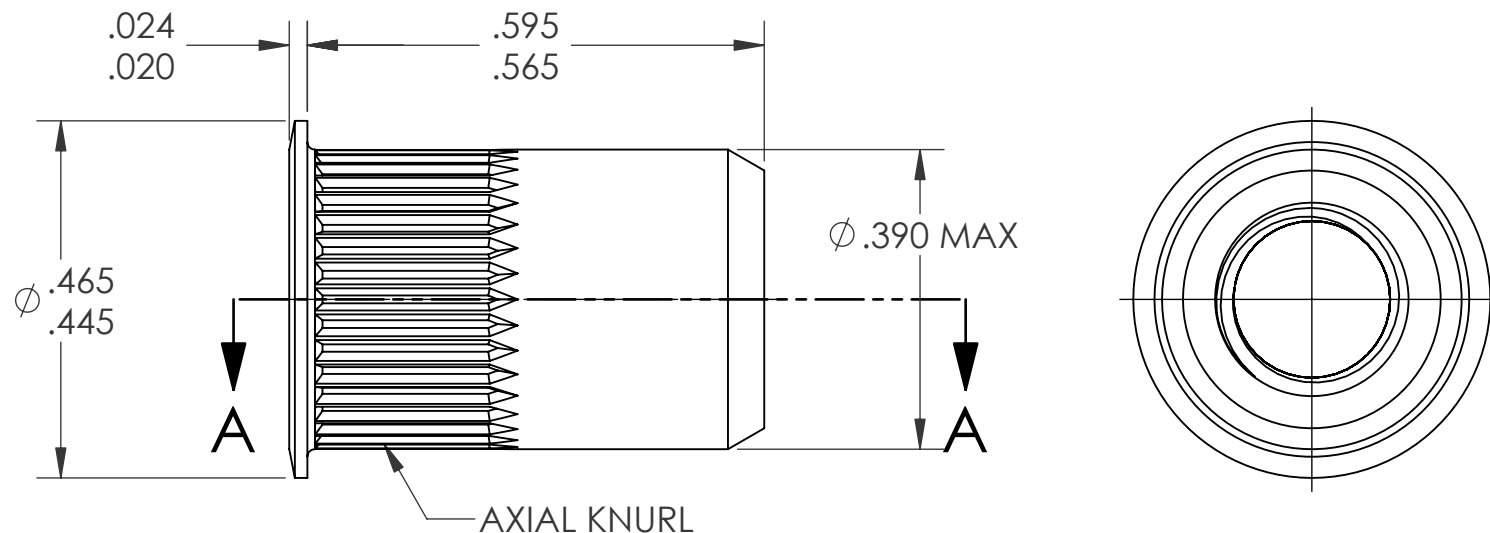


NOTE:

- GRIP RANGE: .027 - .165
- HOLE SIZE: .391 +.006/-.000 AFTER ALL APPLIED FINISHES.
- INSTALLED LENGTH: .380 MAX.
- LUBRICATION: WAX
- INSTALLATION TOOL: SSG 802 SPIN SPIN

SECTION A-A

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX, AND ARE NOT TO BE USED IN ANY MANNER DETRIMENT TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE		
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.002	DRAWN	TOO	5/23/05		
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED				
		MATERIAL C1008/C1010	ENG APPR.	TOO	5/23/05		
			MFG APPR.	AJP	5/23/05		
		FINISH ZINC PLATE YELLOW DICHROMATE PER ASTM B633 Fe/Zn 8um TYPE II	Q.A.			TITLE: SMALL FLANGE OPEN END	
NEXT ASSY	USED ON	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358					
APPLICATION							
			SIZE DWG. NO.			REV	
			A CAK2-2520-165			A	
			SCALE: 2:1 WEIGHT:.0045 kg			SHEET 1 OF 1	