
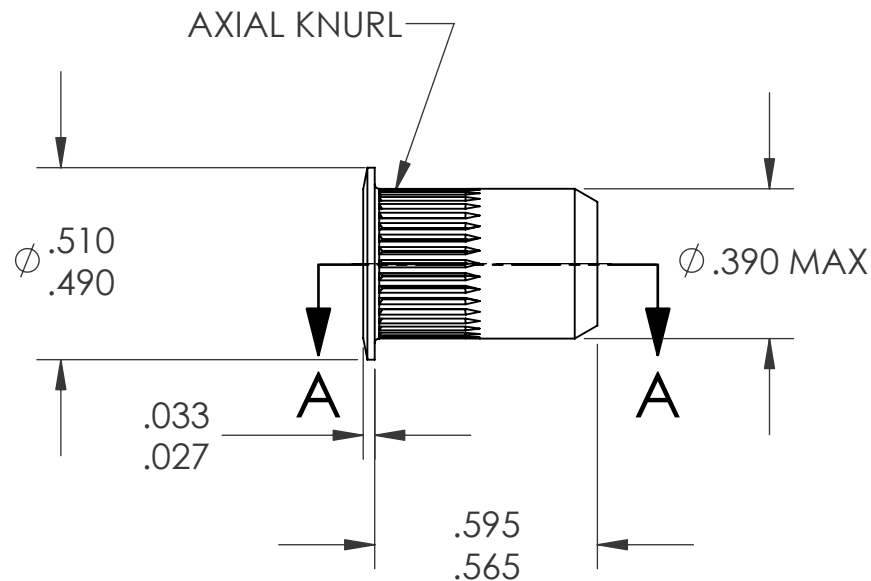



SECTION A-A



NOTE:

1. GRIP RANGE: .027 - .165
2. HOLE SIZE: .391 +.006/-.000 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: .380 MAX.
4. LUBRICATION: WAX
5. INSTALLATION TOOL: SSG 802 SPIN SPIN

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX, AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH ± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.002	DRAWN	TOO	5/23/05	
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED			
		MATERIAL	ENG APPR.	TOO	5/23/05	TITLE: LARGE FLANGE OPEN END
		C1008/C1010	MFG APPR.	AJP	5/23/05	
		FINISH	Q.A.			
		ZINC PLATE YELLOW DICHROMATE PER ASTM B633 Fe/Zn 8um TYPE II	COMMENTS:			
			E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			
NEXT ASSY	USED ON		SIZE DWG. NO.			REV
			A CAL2-2520-165			A
APPLICATION		DO NOT SCALE DRAWING	SCALE: 2:1		WEIGHT: .0045 kg	SHEET 1 OF 1