


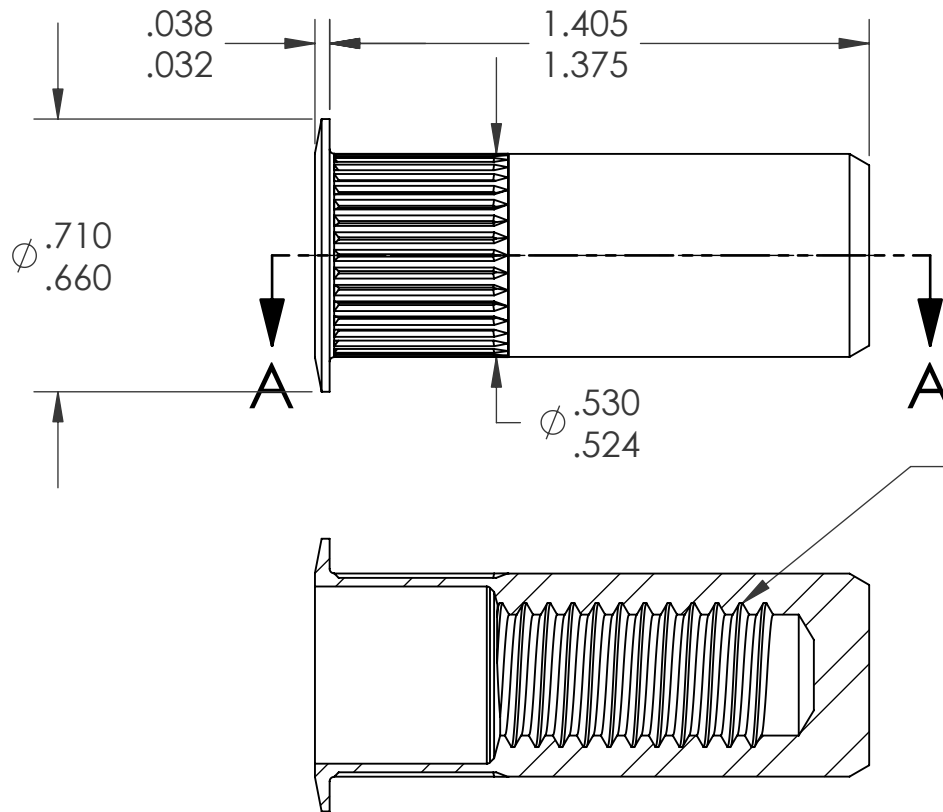

3/8-16 UNC 2B
PER ASME B1.1
MINOR DIA.: .307 - .321

NOTE:

1. GRIP RANGE: .150 - .312
2. HOLE SIZE: .531 +.006/-.000 AFTER ALL APPLIED FINISHES.
3. INSTALLED LENGTH: 1.025 MAX.
4. LUBRICATION: OIL
5. INSTALLATION TOOL: SSG 803 SPIN SPIN

SECTION A-A

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING, AND THE INFORMATION CONTAINED HEREIN, ARE THE PROPERTY OF SHEREX AND ARE NOT TO BE USED IN ANY MANNER DETRIMENTAL TO THE INTEREST OF THE COMPANY.
SHEREX SOLUTIONS RESERVES THE RIGHT TO REVISE PART/DRAWING WITHOUT NOTICE.

		UNLESS OTHERWISE SPECIFIED:		NAME	DATE				
		DIMENSIONS ARE IN INCHES TOLERANCES: ANGULAR: MACH± 1 BEND ±1 TWO PLACE DECIMAL ±.01 THREE PLACE DECIMAL ±.002	DRAWN	TOO	7/20/05	TITLE: LARGE FLANGE CLOSED END			
		INTERPRET GEOMETRIC TOLERANCING PER: ASME Y14.5M-1994	CHECKED						
		MATERIAL	ENG APPR.	TOO	7/20/05				
		C1008/C1010	MFG APPR.	AJP	7/20/05				
		FINISH	Q.A.						
NEXT ASSY	USED ON	ZINC PLATE YELLOW DICHROMATE PER ASTM B633 Fe/Zn 8um TYPE II	COMMENTS: E-mail: info@sherex.com www.sherex.com Phone: 866-474-3739 Fax: 716-875-0358			SIZE	DWG. NO. A CAL2-3716-312B		REV C
APPLICATION		DO NOT SCALE DRAWING				SCALE: 2:1		WEIGHT: .0194 kg	SHEET 1 OF 1